

## Are the 1D and 2D Constitutive Equations of Piezoelectric Materials Right?

Meiling Zhu and Paul Kirby

Cranfield University, UK

Keywords – piezoelectric coefficients, constitutive equations

Piezoelectric materials, having direct and converse piezoelectric effects, provide useful sensing and actuation functions and lead to a variety of macro/micro sensors and actuators devices. The sensors and actuators utilize either the longitudinal piezoelectric coefficient, e.g., thin film bulk acoustic wave resonators (FBAR), or transversal piezoelectric coefficient, e.g., unimorph and bimorph structures such as cantilevers, fixed-fixed beams, and membranes. Evaluation of such macro/micro piezoelectric device performance is basic and essential work and the right use of piezoelectric coefficients is the first step for design, analysis, and development. The following  $e$  or  $d$  form constitutive equations for  $z$ -polarized piezoelectric materials in 2 D plate analyses are often used in literature and text books, which simply come from the 3 D constitutive equations of piezoelectric materials without changes in stiffness, compliance, and piezoelectric coefficients.

IEFS  
Friday  
June 15, 2007  
Session 7  
16:30–16:50  
Talk

$$\begin{bmatrix} \sigma_x \\ \sigma_y \\ \sigma_{xy} \end{bmatrix} = \begin{bmatrix} c_{11} & c_{12} & 0 \\ c_{12} & c_{22} & 0 \\ 0 & 0 & c_{66} \end{bmatrix} \begin{bmatrix} \varepsilon_x \\ \varepsilon_y \\ \varepsilon_{xy} \end{bmatrix} - \begin{bmatrix} e_{31} & e_{31} & 0 \end{bmatrix}^T E_3 \quad (1)$$

$$D_3 = \begin{bmatrix} e_{31} & e_{31} & 0 \end{bmatrix} \begin{bmatrix} \varepsilon_x \\ \varepsilon_y \\ \varepsilon_{xy} \end{bmatrix} + \varepsilon_3^s E_3 \quad (2)$$

$$\begin{bmatrix} \varepsilon_x \\ \varepsilon_y \\ \varepsilon_{xy} \end{bmatrix} = \begin{bmatrix} s_{11} & s_{12} & 0 \\ s_{12} & s_{22} & 0 \\ 0 & 0 & s_{66} \end{bmatrix} \begin{bmatrix} \sigma_x \\ \sigma_y \\ \sigma_{xy} \end{bmatrix} + \begin{bmatrix} d_{31} & d_{31} & 0 \end{bmatrix}^T E_3 \quad (3)$$

$$D_3 = \begin{bmatrix} d_{31} & d_{31} & 0 \end{bmatrix} \begin{bmatrix} \sigma_x \\ \sigma_y \\ \sigma_{xy} \end{bmatrix} + \varepsilon_3^s E_3 \quad (4)$$

Eqs. (1) and (2) in the paper represent that the piezoelectric coefficient,  $e_{31}$  or  $d_{31}$ , is responsible for 2 D plate deformations only and there is no effect of  $e_{33}$  or  $d_{33}$  on 2 D plate deformations. Surprisingly, we found that Eqs. (3) and (4) perfectly work for

2 D plate analyses but Eqs. (1) and (2) do not.

The main motivation for this paper is to correct the mistake in literature and text books by derivations of right  $e$  and  $d$  forms of constitutive equations of  $z$ -polarized piezoelectric materials in 1 D and 2 D analyses in the cases that (1) 2 D plate stress state, (2) 1 D long thin beam, and (3) for 1 D thick beam for macro/micro sensor and actuator designs and analyses, which contain reduced stiffness and enhanced piezoelectric coefficients. Three modified coefficients are proposed by introduction of the new concepts: reduced and enhanced effects in the constitutive equations, enabling to give understanding of how piezoelectric coefficients affect designs of sensors, actuators and generators (energy harvesting devices). The work is based on 3 D constitutive equations and so applicable to the range of piezoelectric materials from bulk down to thick/thin film.

Corresponding author: m.zhu@cranfield.ac.uk, address: Cranfield University, Microsystems and Nanotechnology Centre, Cranfield, MK43 0AL Bedfordshire, UK

Microe  
Langa

Jan Saue


<sup>1</sup>University  
Magdebur

Keywords

Langasite  
the meltir  
at elevate  
componen  
tures. TI  
chemical

Local de  
ferent fi  
these el  
trical fi  
trical cu  
The inc  
face do  
orders  
anticipa  
is found  
creased

Corres  
Studies  
Wernig

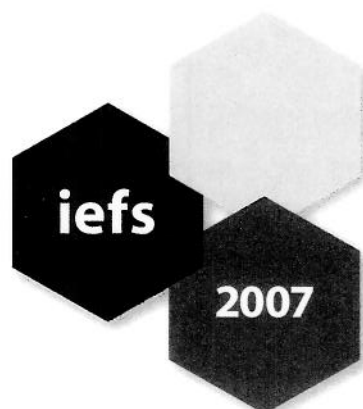

**2nd Workshop on  
Integrated  
Electroceramic  
Functional  
Structures**

Berchtesgaden, Germany  
June 14—16, 2007

**PROGRAMME & ABSTRACT BOOK**

**RWTHAACHEN  
UNIVERSITY**