

## *Algal biofuel generation with combined CO<sub>2</sub> sequestration and nutrient removal*

### The cost benefit of algal technology for combined CO<sub>2</sub> mitigation and nutrient abatement

Judd<sup>1,4\*</sup>, S.J., Al Momani<sup>2</sup>, F. A. O, Znad<sup>3</sup>, H., and Al Ketife<sup>3</sup>, A.M.D.

<sup>1</sup>Gas Processing Center, Qatar University; <sup>2</sup>Department of Chemical Engineering, Qatar University;

<sup>3</sup>Department of Chemical Engineering, Curtin University; <sup>4</sup>Cranfield Water Science Institute, Cranfield University

\*corresponding author, simon.judd@qu.edu.qa.

### Abstract

The use of microalgae culture technology (MCT) for mitigating CO<sub>2</sub> emissions from flue gases and nutrient discharges from wastewater whilst generating a biofuel product is considered with reference to the cost benefit offered. The review examines the most recent MCT literature (post 2010) focused on the algal biomass or biofuel production cost.

The analysis reveals that, according to published studies, biofuel cost follows an approximate inverse relationship with algal or lipid productivity with a minimum production cost of \$1 L<sup>-1</sup> attained under representative conditions. A 35-86% cost reduction is reported across all studies from the combined harnessing of CO<sub>2</sub> and nutrients from waste sources. This compares with 12-27% for obviating fertiliser procurement through using a wastewater nutrient source (or else recycling the liquor from the extracted algal biomass waste), and 19-39% for CO<sub>2</sub> fixation from a flue gas feed.

Notwithstanding the above, economic competitiveness with mineral fuels appears to be attainable only under circumstances which also feature:

- a) the inclusion of cost and environmental benefits from wastewater treatment (such as the energy and/or greenhouse gas emissions benefit from nutrient and CO<sub>2</sub> discharge abatement), and/or
- b) multiple installations over an extended geographic region where flue gas and wastewater sources are co-located.

**Keywords:** *Algae; cost; flue gas; wastewater*


### Glossary of terms

AD	Anaerobic digester/digestion	NPV	Net present value
BNR	Biological nutrient removal	OP	Open pond
BESP	Break-even selling price	OPEX	Operating expenditure
EIA	Environmental impact assessment	PBR	Photobioreactor
ERoI	Energy return on investment	PE	Photosynthetic/ photo-conversion efficiency
CAPEX	Capital expenditure	TN	Total nitrogen concentration
GHG	Greenhouse gas	TP	Total phosphorus concentration
GHI	Global horizontal irradiation	USNREL	US National Renewable Energy Laboratory
GIS	Geographic information system	WwTW	Wastewater treatment works
MCT	Microalgae culture technology		
MW	Megawatt		

## 1 Introduction

Microalgae culture technology (MCT) offers a means of both sequestering flue gas CO<sub>2</sub> and removing nutrients from wastewater in a single process, as well as providing a recoverable resource in the form of biofuel from subsequent extraction and conversion steps (Fig. 1). The number of research publications into the application of MCT, configured as open ponds (OPs) or photobioreactors (PBRs), for these duties has been increasing exponentially at a compound annual growth rate of 6.4-6.7% per year since the mid-1960s [1]. Recent reviews of the subject have encompassed CO<sub>2</sub> capture from flue gas streams [1-3], nutrient removal from wastewater [1, 4-8] and resource recovery – with biofuel production from wastewater sources receiving particular attention [3, 6, 8-11]. Other reviews have considered process integration [12] and net environmental impact of MCT through greenhouse gas (GHG) emissions [13, 14]. Whilst higher-value products than biofuel are attainable from algal biomass, biofuel production appears the most realistic option since contamination of this product by wastewater constituents is less critical than would be the case for some alternative products.

The potential offered by MCT is well-documented in the above review articles, offering a low-energy means of combined flue gases and wastewater treatment without the requirement for aeration for the latter duty. Since aeration makes up more than half of the energy demand of classical biological wastewater treatment [15], the potential overall operational expenditure (OPEX) savings are significant. Combination with flue gas treatment constrains implementation to circumstances where the flue gas and wastewater sources are co-located, limiting supplementary expenditure associated transport of either one of these two sources – though transport of the gas may be less costly than that of the liquid [16]. Crucially, the cost of nutrient and CO<sub>2</sub> supply for the MCT is then obviated.

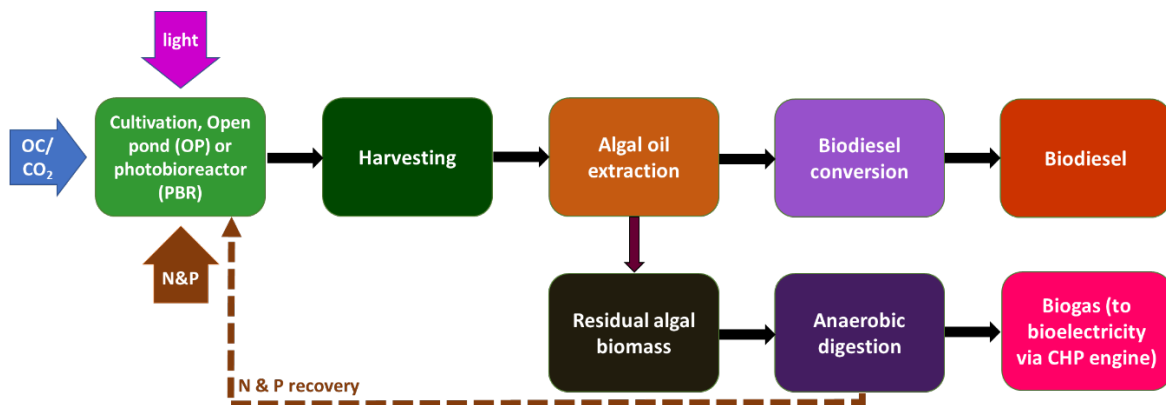

**Figure 1:** Biofuel from microalgae culture technology (MCT), schematic. OC Organic carbon, CHP combined heat and power (adapted from [17])

However, even under such favourable conditions, assessment have pointed to generally unfavourable economics [18], with the cost benefit being obviously highly dependent on the the fuel market value. The cost benefit is otherwise sensitive to a number of often inter-related factors which ultimately determine extent to which the significant costs associated with technology implementation are mitigated both by the value of the biofuel and the environmental benefit of reduced aqueous and gaseous pollutant discharge. Other key contributory factors ostensibly associated with the biofuel production include:

- The plant size, and specifically the economy of scale;
- Plant location and distribution;

- c. The feedwater quality;
- d. The algae and algal lipid productivity;
- e. Ancillary processes, and specifically conversion to biofuel.

These factors all reflect the multi-faceted and complex nature of the subject, encompassing not only the microbiological and process engineering aspects of the technology but also the ambient conditions (which effect biomass generation, and specifically the productivity), environmental impacts and fixed costs. It is the widely accepted critical dependence of the viability of MCT on the algal product value which has led to the increasing use of economic/ econometric methods for minimising the production cost of the biofuel for cost benefit or neutrality. Since the start of 2011 there have been over 50 cost or cost-related analyses of the various MCT system facets. A significant number have considered CO<sub>2</sub> and/or nutrient cost offsetting, primarily through the harnessing of CO<sub>2</sub> from flue gases for the former and either the use of wastewater feed stream or nutrient recycling for the latter (Table 1).

Most analyses conducted have been techno-economic in nature, essentially cost benefit analyses based on available and/or assumed/derived technical information. Within this general scope there have been many different approaches to quantifying the cost benefit. The most common of these involve determination of the required cost (or the break-even selling price, BESP) of either the algal biomass or the derived biofuel for overall cost neutrality [19-24], and within this scope many parameters have been examined.

There have also been a large number of analyses of the system energy balance, based on the energy return on investment (ERoI), which have need recently reviewed [22]. More recent examples have provided an energy balance for applying OP to wastewater treatment [10], as well as a comparison of the CO<sub>2</sub> balance of biofuel production by an OP to that of conventional diesel production [25]. These analyses predominantly provide outputs in terms of the ERoI, and/or net CO<sub>2</sub> or GHG emissions, but not necessarily the BESP. The use of carbon accounting seems to be complicated by the range of energy:carbon conversion factors used, which can range from 0.26 kg CO<sub>2</sub> kWh<sup>-1</sup> or lower for “carbon neutral” conditions [22] to 0.95 kg CO<sub>2</sub> kWh<sup>-1</sup> for a coal-fired power station [26]. Notwithstanding this, recent studies have incorporated environmental impacts into the cost model [27-29] to offer a more robust BESP.

Of key interest are those studies assessing the cost benefit of treating wastewater, in terms of energy saving and environmental impact assessment (EIA) and so overall cost, in addition to reducing CO<sub>2</sub> emissions and generating biofuel; such a basis can reasonably inform the case of combined flue gas/wastewater treatment. This review aims to identify circumstances where the benefit of both the biofuel and the supply of the substrate sources for the algae at near-zero cost can most effectively mitigate against the key outgoings. The most convenient and consistent basis for this is through analysis of the impact of both the proportional decrease in and the end value of the biofuel BESP; the latter can then be directly compared with the market price of the mineral fuel. The review proceeded through capturing of all cost analyses, along with closely related EIA/ERoI studies, published from 2011 onwards and the collation of all relevant cost data therein. The impact of offsetting of the cost of the CO<sub>2</sub> and/or nutrient supply was determined primarily through identifying and isolating these cost contributions. Other significant

contributors to cost were also identified and quantified, and the related operating parameters examined.

**Table 1:** Cost analyses examples, 2011 onwards: MCT with cost offsetting

Reference	Primary system facets/variables considered, or study objectives	Key correlation(s)/output(s)
<b><u>Combined CO<sub>2</sub> and nutrient cost offset<sup>1</sup></u></b>		
[19, 20]	All key fundamental factors contributing to cost for OP (2012a) and PBR (2012b)	Costs of installation at small and large-scale; cost benefit of zero-cost CO <sub>2</sub> and nutrient feed.
[30, 31]	Energy and carbon accounting; EIA	OP vs PBR; cost benefit of zero-cost CO <sub>2</sub> and nutrient feed.
	Water and nutrient recycling; excess nutrient demand met by supplementation	OP vs PBR at different productivities and lipid content.
[16]	Co-location of multiple flue gas and wastewater sources at national scale.	Potential production capacity and selling price of biofuel in US with reference to nutrient and CO <sub>2</sub> availability and infrastructure requirements.
[32]	Covered 100 ha pond	Full CAPEX and OPEX determination
[23]	OP; Algal species; light wavelength (blue, green, red, white)	Impact of (a) zero-cost nutrient and CO <sub>2</sub> supply, and (b) light wavelength on biofuel selling price.
[22]	Algal growth; lipid productivity; scalability; environmental impact	Summary of published lipid yields, biofuel costs. Impact of productivity on fuel cost, and biomass processing technology on GHG emissions.
[33]	Optimisation based on maximum algal yield and maximum operating margin	Impact of (a) 90% nutrient recycling and (b) zero cost CO <sub>2</sub> supply
[34]	Multiple flue gas and wastewater sources at regional scale.	Impact of regional decentralisation of processing facilities on cost
[24]	PBR technology (OP & PBR); Power plant technology (3 types); irradiation intensity; CO <sub>2</sub> fixation rate.	BESP of the generated electricity (\$/MW) and CO <sub>2</sub> avoidance cost (\$/t) against the selling price of the algal biomass (\$/t)
[29]	All key fundamental factors contributing to cost (incl carbon credit) for WwTW centrate feed.	Cost sensitivity to algal concentration, biofuel yield, chemicals cost, PBR CAPEX, nutrient feed, harvesting technology, and productivity
<b><u>CO<sub>2</sub> cost offset<sup>1</sup></u></b>		
[21]	Review of published studies with cost harmonisation	Impact of digestion of spent biomass on process economics.
[25]	Co-production of biofuel and animal feed; algal vs. conventional biofuel production; pure nutrient feed	CO <sub>2</sub> generated per unit of energy produced (kg CO <sub>2</sub> per unit energy)
[35]	Updated USNREL analysis; pure nutrient feed.	Impact of flue gas source on biofuel cost
[28]	National scale implementation of MCT for generation of 5b US gall/y.	Biofuel selling price adjusted for locational and seasonal changes in productivity
<b><u>Nutrient cost offset<sup>1</sup></u></b>		
[36]	Energy return on investment (ERoI) for three different scenarios	ERoI based for WW treatment
[37]	Algal oil-extracted residue fed to AD	Most economic option identified in terms of lifetime NPV
[38]	PBR viability for wastewater treatment based on three algal species	Impact of scale up from 150 to 1500 L PBR. Cost per m <sup>3</sup> treated wastewater
[78]	Regional-scale implementation with co-located WwTW's	Trade-off between space and wastewater source availability

<sup>1</sup>Offsetting of CO<sub>2</sub> cost normally through flue gas feed; Off-setting of nutrient cost normally through wastewater feed or nutrient recycling. <sup>2</sup>AD anaerobic digester; EIA Environmental impact assessment; ERoI Ratio of energy produced to energy consumed; GHG greenhouse gas; OP high-rate algal pond (or open raceway); MW megawatt; NPV Net present value; PBR photobioreactor; WwTW wastewater treatment works; USNREL US National Renewable Energy Laboratory [39].

## **2 Key process facets and parameters**

### **2.1 Plant size**

A comparison of the impact on cost of key system facets, such as plant size, across different studies is challenged by the different bases on which key parameters are expressed. This in turn is dependent on the primary focus of the published study. As a result, plant size has been expressed in terms of the bioreactor area footprint or volume [19, 20, 27, 35, 40], the algal or algal-derived product production rate [19, 20, 23, 29, 40, 41]; the carbon dioxide fixation rate [34], or the wastewater treatment flow capacity [6, 19, 20]. Whilst these parameters are inter-related, the nature of the relationship is dictated by further assumptions, most critically concerning productivity (Section 2.4).

The footprint is directly impacted by the technology configuration. OPs demand a higher footprint than PBRs due to the shallow pond depth (generally <0.4 m); the difference can be more than an order of magnitude for the same production capacity [30]. PBRs can be configured as vertical columns, horizontal tubes, with a serpentine flow of the algal biomass through them, or flat panels. As a consequence of this, the equipment costs of PBRs are considerably higher than for OPs, which normally more than nullifies the cost benefit of the reduced land requirement.

For the more widely studied OP technology, data calculated within individual studies suggest that there is little economy of scale for the cultivation stage beyond a certain size. Brownbridge et al [42] computed a \$1.2-2.2 kg<sup>-1</sup> decrease in biomass cost per Mt y<sup>-1</sup> increase in capacity, or around 1% per 10,000 t y<sup>-1</sup> increase in capacity, beyond a capacity of 40,000 t y<sup>-1</sup>. Rickman et al [26] determined the product cost to decrease by only 0.5% on increasing the pond size by an order of magnitude from 100 ha, confirming previous observations [21] based on a four-scenario study. Such outcomes are perhaps unsurprising given that many of the OP cost contributions (e.g. land and mixing energy) are directly proportional to the total algal mass [43]. Against this, and based on an actual MCT facility, an 82% decrease in biofuel cost has been calculated on increasing the capacity from 3.8 to 200 t algal biomass per annum [19]. However, this was associated with other efficiencies in the production process through dispensing with capital equipment.

It has been observed, however, that scaling of bench-scale productivity data specifically is insufficiently rigorous, with productivity from large-scale facilities being estimated from linear extrapolation of laboratory data [22]. Inclusion of seasonal and spatial trends (Section 2.2), which significantly impact on productivity, appear to have been addressed only relatively recently in cost analyses [28].

### **2.2 Plant location and distribution**

It is self-evident that a process which operates through photosynthesis will be more productive when the light intensity is greater. Irradiation intensity is determined ostensibly by the geographical location, and thus local climate, of the installation since algal technologies are normally powered by natural daylight: the use of artificial light is estimated to add \$25 kg<sup>-1</sup> dry-weight biomass to the cost [44], rendering this approach economically inviable. For example, the average global horizontal irradiation (GHI) in kWh per m<sup>2</sup> pond area per day is estimated to decrease by >28%, from >6.75 to <4.25,

from the Middle East to East Asia [35]. Factors of 2-3 changes in BESP have been estimated from changing location from Northern Europe to either Southern Europe or the Caribbean, according to two separate Dutch studies [43, 45].

A consideration pertinent to the widespread implementation of MCT across a geographical region is the distribution of the algal reactors with reference to potential flue gas [28], wastewater [88], or combined flue gas and wastewater sources [16]. The latter study, an analyses of algal biofuel production potential in the US based on a centrate WwTW (wastewater treatment works) feedwater (Section 2.3) combined with flue gas-sourced CO<sub>2</sub>, concluded that on a national level the nutrient supply in wastewater was limiting in the production process, a deduction supported elsewhere [46]. The Orfield et al [16] study concluded that 1700 megalitres/a of bio-oil could be produced nationally at a cost of \$0.55/L within certain regions, though it has also been calculated that the nutrient content in the centrate stream limits US national algal biofuel production to <400 ML y<sup>-1</sup> [46]. Orfield et al determined the total aggregate area across the southern USA potentially available for economic production of algal biofuel, based on co-located wastewater treatment works and flue gas sources identified through GIS (geographic information system) analysis, to be 83,000 ha. A similar analysis, conducted for a region of Mexico, concluded the break-even selling for the biodiesel to be \$0.97 L<sup>-1</sup> for MCT implementation [34].

A further constraint on the viability of regional implementation is land availability. Urban wastewater treatment works (WwTWs) tend to have limited available land for installing the MCT reactors or ponds but have large amounts of surplus wastewater, whereas in rural locations the reverse is normally the case [88]. A key contributor to the cost analysis, therefore, is the infrastructure required for transporting the wastewater to the MCT location.

### **2.3 Feed wastewater source and quality**

The classical MCT wastewater treatment application is as a tertiary treatment process following the secondary clarification stage of a WwTW [38, 47-51]. In such applications MCT has been shown to remove up to 95% of both the N and P for continuous operation (Table 2) for hydraulic residence times of, for the majority of studies, 2-10 days. As previously noted [1], the extended residence time compared with that of the classical biological nutrient removal (BNR) process (8-10 hours) combined with the shallow depth of the pond means that the footprint of the OP can be two orders of magnitude greater than that of the conventional BNR process.

A significant difference in the BESP appears to arise if the wastewater source is more concentrated in nutrient. With this in mind, a number of recent studies have considered the use of centrate from the WwTW anaerobic digesters as the source for organic carbon and N and P [16, 29, 47, 52-56]. The use of this concentrated source of carbon and nutrients increases the efficiency of their assimilation by the microalgae, with >90% removal of the nutrient load from this stream being reported [47, 52, 55]. A further significant benefit is gained in obviating the cover required for H<sub>2</sub>S management (a 20% reduction in the total annual cost of a 1200 m<sup>3</sup> bioreactor [29], with further cost reductions associated with the reduced pollutant load on the wastewater treatment works (~8%). This is then reflected in

the reduced biofuel selling price, calculated as being as low as \$0.55-0.59/L according to other assumptions made [16, 29].

Whilst, the benefit offered by MCT as a tertiary treatment process for nutrient removal from wastewaters is lost by employing this configuration, the benefit in terms overall environmental impact, in terms, appears to be significant. A five-fold reduction in GHG emissions and eutrophication potential combined with a ten-fold reduction in water use, based on a PBR configuration, has been calculated for implementing MCT using centrate as the feed nutrient source rather than the tertiary wastewater [46]. Moreover, the feed nutrient concentration impacts on the economic viability through the algal productivity (Section 2.4), centrate offering significant promotion of growth [53, 55].

**Table 2:** Recent MCT nutrient removal papers, real wastewaters, continuous systems (adapted from [1]).

Wastewater (municipal)	Technology	Productivity <sup>1</sup> g d <sup>-1</sup>	%N rem	%P rem	HRT <sup>2</sup> d	Reference
Secondary	Biofilm	-	30-50	50-80	2	[57]
Centrate <sup>3</sup>	Helical tube	920	94	89	2	[52]
Centrate <sup>3</sup>	Biofilm	2.9 <sup>4</sup>	70±8	85±9	10	[53]
Secondary	Tubular air-lift	18-21	86-95	69-94	5	[47]
Secondary	OP	5-8	62-77	51-63	10	[47]
Primary	OP	15-48 <sup>5</sup>	47-79 <sup>5</sup>	20-49 <sup>5</sup>	5.5-9	[51]
Primary	OP	-	56-67	15-28 <sup>6</sup>	2	[48]
Primary	OP	14-17	74-75	58-79	4	[49]
Primary	OP	-	59-79	12-34	4-9	[50].
Primary	Parallel plate	42-60	72	92	0.64	[58]
Centrate <sup>2</sup>	Column	Up to 1000	>90	-	3.3	[55]

<sup>1</sup>per m<sup>2</sup> for OP, per m<sup>3</sup> for PBR; <sup>2</sup>hydraulic residence time; <sup>3</sup>concentrate from centrifuge; <sup>4</sup>units of g m<sup>-2</sup> d<sup>-1</sup>, i.e. with reference to biofilm area rather than reactor volume; <sup>5</sup>Seasonally dependent on pond organic matter: highest concentration in summer, lowest in winter, 7-18°C temperature range, % removal decreases with increasing load; <sup>6</sup>pH-dependent; AD anaerobic digester; BMPBR biofilm membrane bioreactor; Col column; OP open pond. *Refers to ammonia rather than TN.*

## 2.4 Productivity

Biofuel production relies on the generation of algal lipids, which is a function of both the algal production rate and proportion of lipids in the algal cells. Productivity of both the algal biomass and lipids is affected by a number of parameters relating to both the amount and quality of the light and the extent to which it is effectively harnessed by the algae. These parameters include MCT technology configuration (PBRs being more intensive with respect to area footprint than OPs), algal species, irradiation intensity and light wavelength [23], as well as the feed source characteristics.

Reported productivity of algal lipids varies significantly between studies, from less than 7 [59, 60] to more than 120 m<sup>3</sup> ha<sup>-1</sup> a<sup>-1</sup> [35, 61] according to conditions employed or assumptions made (Table 3). A similarly wide range of values applies to the productivity, in g m<sup>2</sup> d<sup>-1</sup>, of the algal biomass, with the highest values reported for high-strength feedwaters such as municipal wastewater centrate [7]. Whilst subsequent biofuel production costs are also dependent on the conversion methods used - primarily solvent extraction, hydrothermal liquefaction and pyrolysis [46, 62-65, 69] - it has been widely observed that costs are most sensitive to algal biomass productivity [13, 21, 66-68] and/or lipid content [13, 28, 29, 68, 69]. For example, increasing the lipid content for an OP from 25% to 50% has been reported to decrease the biofuel BEP by 39% [28], increase the NPV by 6-8% [66], and the EROI by 63% [13]. A similar increase in algal productivity, from 25 to 50 g m<sup>-2</sup> d<sup>-1</sup>, produces a 19% decrease in BEP [28] and a 10-12% increase in

the NPV [66]. In these published analyses the biofuel cost sensitivity to all other factors considered, including nutrient recycling, CO<sub>2</sub> supply costs and amortised pond construction costs, have been shown individually to be at least 70% lower than the corresponding sensitivity to either lipid content or algal productivity [28, 66, 69].

**Table 3:** Published cost analyses, 2011 onwards: production cost ranges in \$ per unit biomass mass or biofuel volume against installation size (area or volume, production capacity) and algal or lipid productivity

Author(s)	Reactor	Installation size		Productivity		% lipid	Production costs	
		ha or m <sup>3</sup>	Productn cap <sup>a</sup> , t/y ML/y	g/m <sup>2</sup> /d g/L/d algae	m <sup>3</sup> /h/y lipid		Biomass, \$/kg	Biofuel, \$/L
<b><i>Combined CO<sub>2</sub> and nutrient cost offset</i></b>								
[19], OP	OP	100	-	20	-	25	0.93 - 0.6	-
[20], PBR	PBR	1570	200	30(15-45)	-	-	17 - 2.4	-
[27]	OP	333	-	20-30	-	20-50	-	1.7 - 3.4
	PBR	3-7×10 <sup>5</sup>	-	0.65-2.0	-	20-50	-	3.1 - 5.8
[30]	PBR	10	-	20-40	-	-	12-13 - 5.1	-
[16]	OP	83k	1700	-	25	25(20-30)	-	0.78 (0.61-3.5)
[23]	OP	-	1260-	8.5	-	19	2.7 - 1.0	7.8 - 2.9
			2520	-17		30	1.0 - 0.73	2.9 - 2.1
[22]	-	-	-	10-13 <sup>b</sup>	6.4-127	-	-	9 - 0.52 <sup>c</sup>
[30]	OP	400	-	10-20	-	-	2.3 - 0.45	-
[24]	-	-	-	-	-	-	0.44 - 1.0	-
[32]	CPR	100	14308	39.2	-	40	-	5.6
[29]	PBR	2.6	3760	35-57	-	29	-	0.59
<b><i>CO<sub>2</sub> cost offset</i></b>								
[19]	OP	100	-	20	-	25	0.93 - 0.64	-
[35]	OP	40	-	30	-	50	-	0.97 - 0.56
	OP	-	-	60	-	-	-	0.85 - 0.58
[26]	OP	120	-	23	-	22	0.62	2.2
[69]	-	-	0.04	30	-	-	-	5.0 - 8.4
[28]	OP	485 <sup>d</sup>	19000	14.6	-	-	-	2.6 - 3.3
[34]	Multi-location	-	-	-	-	-	-	0.97
<b><i>Nutrient cost offset</i></b>								
[70]	OP	500	-	24	37	40	-	3.6
	PBR	-	-	40	55	-	-	22
[40]	OP	1951	38	25	-	25	-	2.6
	PBR	-	-	1.25	-	25	-	5.4
[43]	OP	1-100	-	21	-	-	1.8	-
	PBR	1-100	-	41-64	-	-	1.0	3.64
[21]	OP	2000	-	20	-	25	0.8	3.05
[41]	OP	-	38	25	-	25	-	3.9
	PBR	-	-	1.25	-	-	-	9.9
[42]	-	-	0.1	22-33	-	30	-	1.2-2.4
[68]	-	-	-	-	-	-	-	1.3-2.4 - 1.0-1.1

CPR covered photobioreactor; <sup>a</sup>capacity expressed as mass of biomass (t/y) or volume of biofuel (ML/y) generated, ML megalitre; <sup>b</sup>based on previously published data; <sup>c</sup>based on biomass processing; <sup>d</sup>multiple installation locations; units of t/ha. Cost offsetting as defined in Table 1. Ranges of biofuel costs elaborated in Fig. 3

Correlations provided for biofuel cost  $C_b$  against algal productivity  $P_A$  in g m<sup>-2</sup> d<sup>-1</sup> [26, 28]; show the expected inverse relationship (Fig. 2):


$$C_b = m P_A^{-n}$$



where  $m$  and  $n = 46.1$  and  $1.07$  respectively according to Rickman et al (2013) [26] compared to  $15.7$  and  $0.66$  for the same parameters from the analysis of Davis et al (2014) [28].

Thus, for a threshold biofuel cost of  $\$1 \text{ L}^{-1}$  the productivity required is  $36 \text{ g m}^{-2} \text{ d}^{-1}$  according to the analysis of Rickman et al [26] compared with  $65 \text{ g m}^{-2} \text{ d}^{-1}$  from that of Davis et al [28], the difference being attributable to the differing boundary conditions assumed. A correlation of biofuel cost against lipid productivity in  $\text{m}^3 \text{ ha}^{-1} \text{ a}^{-1}$  based on 13 published post-2010 OP-based data points, as compiled by Quinn and Davis [22], indicates a similar inverse trend in biofuel cost vs lipid productivity (Fig. 2), albeit with significant data scatter due to the range of systems considered. In this case  $m$  and  $n = 38.0$  and  $-0.87$ , yielding a required productivity of  $62 \text{ m}^3 \text{ ha}^{-1} \text{ a}^{-1}$  for a biofuel cost of  $\$1 \text{ L}^{-1}$ . Biofuel costs also follow the same inverse relationship with photosynthetic (or photoconversion) efficiency PE [70], as would be expected given the link between PE and lipid production.

Even for a relatively narrow range of values for algal productivity (20-30%) and lipid yield (25-35%), however, the absolute values determined for the cost of the biofuel have ranged from  $\$2.8$  to  $6.7$  per litre with no apparent trend in data taken across different studies, according to a review of selected outputs [21]. These data arose from test sites in the US and featured in the 2008 National algal biofuels technology roadmap of the US Department of Energy's biomass programme, with no offset for wastewater treatment/nutrient supply or, for most studies, flue gas treatment/CO<sub>2</sub> supply. Cost harmonisation for four of the studies produced a much narrower range of costs of  $\$2.9$ - $3.5 \text{ L}^{-1}$  [21], somewhat higher than the value of  $\$2.6 \text{ L}^{-1}$  reported in the highly cited work of Davis et al [40].

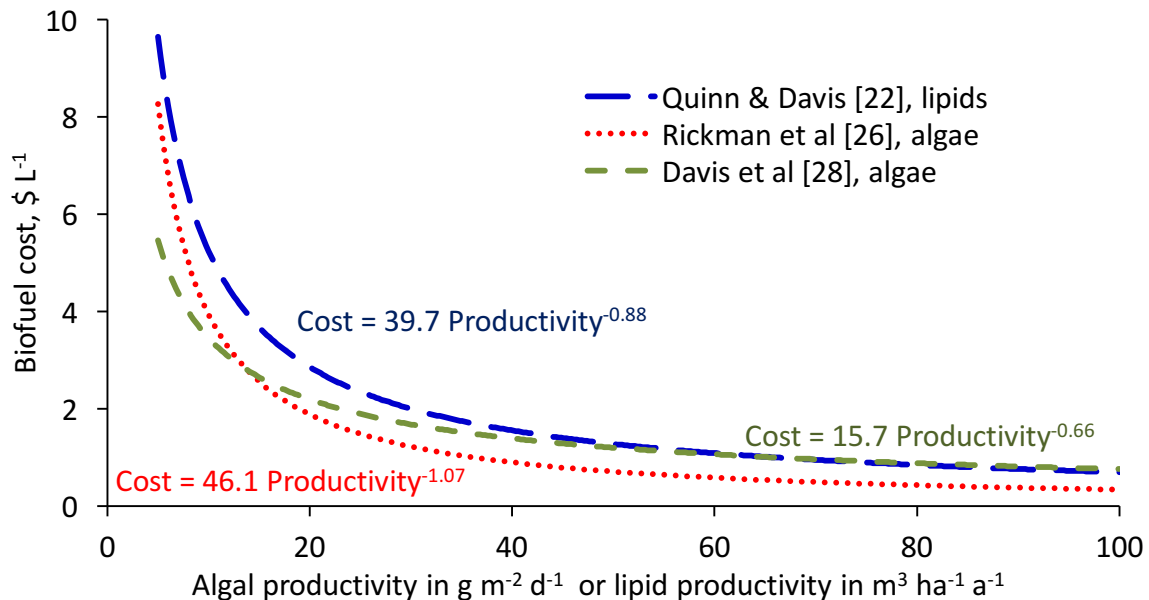

**Figure 2:** Biofuel cost vs lipid or algal productivity

Productivity is clearly influenced by a broad range of factors. Those germane to combined CO<sub>2</sub> sequestration and nutrient removal are CO<sub>2</sub> and nutrient load, with light intensity also

being a key variable with local climate. A cursory analysis of the impact of cultivation conditions based on real wastewater feeds (Table 4) indicates biomass productivity increases of up to 74% compared with the reference conditions across a range of studies. Regression analysis of this data set suggests, with a coefficient of determination of 0.99, that algal productivity increases by around 5% per % CO<sub>2</sub> concentration in the feed gas and by almost 2% per mg/L phosphate (as P) in the wastewater. Economic viability is thus clearly affected by the cultivation conditions and, specifically, the nature of the CO<sub>2</sub> and nutrient sources.

**Table 4:** Reported algal biomass productivity under different process conditions

Cultivation medium <sup>r</sup>	TP <sub>in</sub> mg L <sup>-1</sup>	TN <sub>in</sub> mg L <sup>-1</sup>	Light intensity, μmol m <sup>-2</sup> s <sup>-1</sup>	Inlet CO <sub>2</sub> , %v/v	P <sub>A</sub> , g biomass <sup>-1</sup> L <sup>-1</sup> d <sup>-1</sup>	% promotion	Refs
MLA	6	28	200	0.03*	0.14	R	[79-81]
MLA	6	28	200	5	0.39	64	
MLA-Ww	8	56	180	0.03*	0.16	14	
TS	1.2	19	132	0.03*	0.04 <sup>a</sup>	R	[82]
TS					0.01 <sup>b</sup>	74	
nr	140	39	800	nr	1.02	R	[55]
C	126-158	14-18			1.03	10	
AM	7	25	300	5	0.27	R	[83]
AM			500		0.36	R	
40% C			300		0.27	0.7	
50% C			300		0.31	13	
40% C			500		0.38	5.3	
50% C			500		0.44	19	
Ww	2.5	22	610	nr	0.073	R	[84]
Ww	41	3		nr	0.079	8	

MLA Marine labs American Society of microbiology-derived medium; R: reference condition; Promotion ratio = % by which growth is promoted; TS treated sewage; C centrate; Ww municipal wastewater; AM algal medium; nr not reported; \* atmospheric air.

## 2.5 Ancillary processes

Whilst a range of extraction technologies have been studied or reviewed [24, 46, 62-65] and their costs determined, a number of studies [34, 40, 45, 69] have indicated most of the cost of the biofuel production process to be attributable to biomass cultivation and harvesting. Conversion to biofuel from the intermediate product appears to add little to the biofuel cost, although optimisation of harvesting, oil extraction and biodiesel production has been calculated to reduce the BESP by up to 41% depending on the precise process technologies employed [69]. This includes using flue gas for algal biomass drying as well as for cultivation. The cost of the OP cultivation stage alone, on the other hand, has been calculated as contributing as much as 83% to the total cost [34], and for a PBR process more than 80% of the CAPEX is associated with the reactor itself [40]. Almost all analyses which compare the OP and PBR technologies conclude that the overall cost, either as total expenditure or net present value (NPV), of the PBR technology is greater than that of the simpler but larger-footprint OP.

The OPEX of algal harvesting specifically, based on conventional recovery processes (sedimentation, dissolved air flotation and centrifugation) and assuming an algal biomass concentration of 1 g L<sup>-1</sup> containing 35% lipid, have been calculated as being \$0.44 L<sup>-1</sup> gasoline equivalent [62]. The same authors calculated this figure to decrease to \$0.015 L<sup>-1</sup> on employing ultrasonic separation with sonication for downstream lipid extraction.

However, other analyses [40] suggest that inclusion of capital costs increases the figure to almost \$1 L<sup>-1</sup>, attributable mainly to equipment costs. This reinforces an often-stated point that a significant reduction in process equipment costs is required to reduce the cost of algal biofuel generally.

A few studies [21, 27, 71] have included an anaerobic digestion (AD) process for recovering the latent energy of the extracted algal biomass through conventional methanogenesis of the organic matter to methane. Whilst this provides a further energy benefit, the overall cost benefit appears to be marginal [21] unless the AD technology is already installed on site and has spare capacity. A consideration of integration of MCT with the power plant providing the CO<sub>2</sub> from the flue gas revealed that, for a standard photosynthetic efficiency of 4% the algal biomass value was 24-26% higher than the BEP irrespective of the power plant technology [24].


### **3 Summary of quantitative impacts**

Comparison of quantitative outputs of recently-published cost analyses is challenged by both the diversity in the cost and energy balance determination methods and, crucially, the omission of fundamentally important parameters such as the lipid productivity and lipid:biofuel conversion factor. Most studies since 2011 have concluded that, based on a standard set of assumptions for productivity (15-30 g m<sup>-2</sup> d<sup>-1</sup>), lipid (or useful organic product) content (20-35%) and an OP design, the biofuel selling cost exceeds \$2/L. Costs can be slightly offset through the value assigned to the residual extracted algae, assumed to be between \$0.27 kg<sup>-1</sup> [67] and \$1.8 kg<sup>-1</sup> [61]. However, this is not sufficient to allow the biofuel to be cost-competitive with mineral-based fuel (which, at 2016 prices, is well below \$1/L). Even for the case where solar power is harnessed to meet the heating energy demand (for biomass drying), the calculated BEP of the biodiesel from one study exceeded \$2 L<sup>-1</sup> [72].

The key factor of interest, however, is whether the implementation of MCT for combined CO<sub>2</sub> fixation from flue gases and nutrient removal from wastewater significantly mitigates against the MCT costs. In general, the mean reduction in cost provided by harnessing wastewater and flue gas for nutrient and CO<sub>2</sub> respectively is between 35% and 86% across the 6 recent studies where such a comparison can be explicitly made (Fig. 3). This compares with 12-27% for obviating fertiliser procurement through harnessing wastewater (or else recycling the liquor from the waste extracted algal biomass), and 19-39% for harnessing the CO<sub>2</sub> from a flue gas feed. In most cases the comparison is simply through determining the impact of omitting the CO<sub>2</sub> and nutrient feed costs on the overall cost of the biofuel [19, 30] or energy/CO<sub>2</sub> equivalent of the overall process [13]. It has been suggested [65], however, that the infrastructure costs associated with harnessing nutrients from a wastewater feed exceed the cost of nutrient supply from routinely purchased fertilisers.

In some cases, where the centrate (the concentrated wastewater stream from sludge processing operations) has been used as the feedwater, the additional benefit of the reduced nutrient load on the wastewater treatment works has been determined [29]. A few studies [16, 34] have incorporated logistical considerations regarding the optimal siting of facilities for multiple wastewater and flue gas sources within a specific geographical region. It appears to be only for these examples of more extensive implementation and/or the introduction of supplementary energy/cost parameters that a viable low BEP value

(below \$1/L, Table 3) is attained. In the absence of such circumstances, many authors have concluded that a step improvement in technology efficiency, either at the harvesting/extraction stages or, more effectively, the cultivation stage, is required to bring the break-even biofuel selling price (BESP) down to parity with conventional fossil fuels. In the absence of such technical improvements, it has been suggested that biofuels can only be made economically viable through public policy intervention [73].

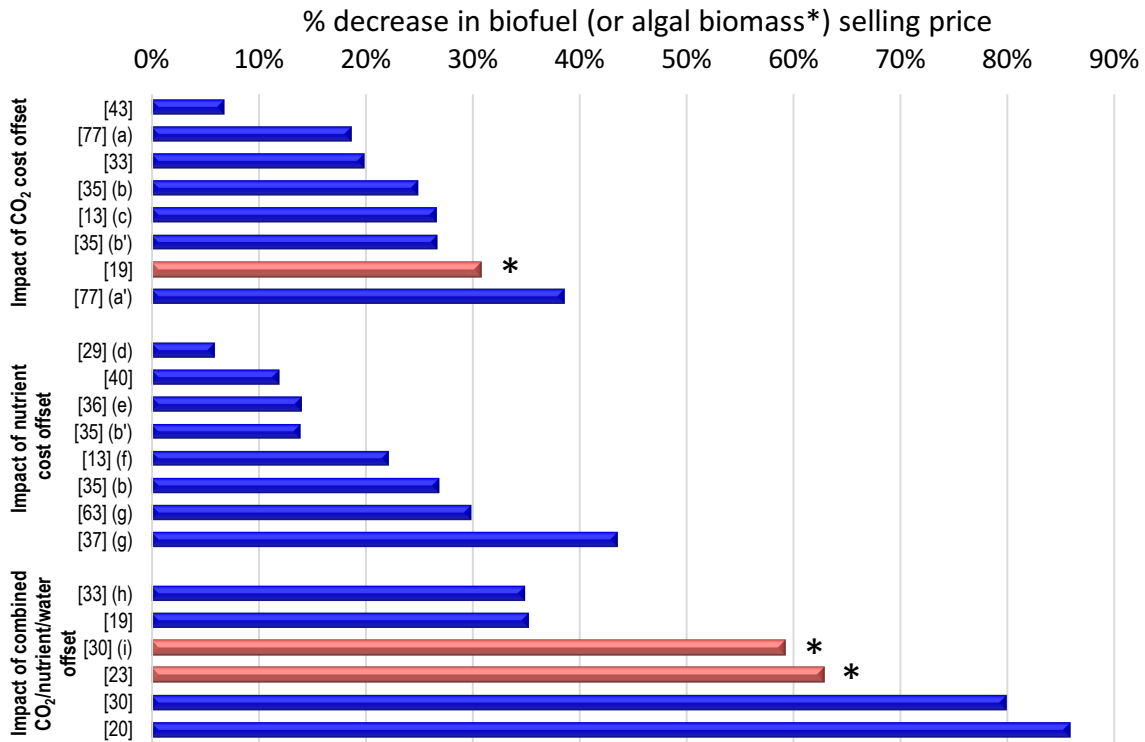

**Figure 3:** Average % cost reduction in algal biomass\* or biofuel product according to published OP analyses  
(a) High-cost biomass, (b) Higher productivity (60 g m<sup>-2</sup> d<sup>-1</sup>), (c) Ave of 4 data, (b') Lower productivity (30 g m<sup>-2</sup> d<sup>-1</sup>), (a') Lower-cost biomass, (d) P-rich ash for P fertiliser feed, (e) Ave of 8 data, 10-17%, (f) Ave of 8 data, (g) % of OPEX, (h) Recycling 90% of nutrients + zero cost CO<sub>2</sub>, (i) PBR

Ultimately, though, algal biofuels can never exclusively provide the source of transport fuel because of global nutrient limitations. In the case of the EU, for example, the displacement of mineral fuel with biofuel would demand a doubling of the current fertiliser production rate in the region [30]. Nutrient limitation has also been identified as constraining factor in the US [16]. Overall, an additional 53 million tonnes of phosphate would be required annually to displace mineral-based petroleum by algal biofuels, an ultimately unsustainably amount given the limited of phosphorus globally [74].

However, N and P largely form part of the residuals (i.e. the extracted algal biomass) and can then potentially be recovered and reused for the MCT process. This being the case, a key consideration is whether recovery of nutrient in this manner is (a) technically feasible, and, (b) more cost effective than nutrient supply from municipal wastewaters or from standard chemical dosing. High nutrient loads, as would be encountered in the liquor from anaerobic digestion of the residual algal biomass (see Fig. 1) have been demonstrated to

increase algal biomass productivity. If the MCT nutrient demand can be mostly satisfied by this stream then the cost benefit offered by the wastewater effluent treatment would be solely through obviating the BNR process, although the overall environmental benefit of using a recycled, concentrated nutrient source appears to be significant [46].

Given the questionable cost benefit of MCT in terms of a sustainable fuel source and the global nutrient limitation, the technology should perhaps be considered as an alternative extensive (i.e. high-footprint, low-energy) system for wastewater treatment, comparable to constructed wetlands. Whilst algal ponds [75] and algal biofilms [76] have been considered in conjunction with constructed wetlands for process enhancement, there has yet to be a comparative techno-economic analysis of the two technologies specifically for tertiary wastewater treatment for nutrient removal. Small-scale tertiary wastewater treatment systems with centralised facilities for lipid extraction, as considered by Hernández-Calderón et al [34], may prove to be more economically viable than the process alternatives.

## **4 Conclusions**

A review of recent literature on the economics of algal technology (MCT) for biofuel production indicates that, although offering a 35-86% reduction in the biofuel break-even selling price (BESP), the harnessing of CO<sub>2</sub> from flue gases and nutrients from wastewater does not provide sufficient economic competitiveness under most circumstances. However, analyses indicating near-parity of the BESP with mineral-based fuel costs encompass flue gas and wastewater feeds as well as the following features:

- a. Inclusion of all cost benefits from wastewater treatment and CO<sub>2</sub> abatement, such as energy credit for the reduced wastewater treatment load, and/or
- b. Multiple installations over an extended geographic region allowing for co-location of MCT with wastewater and flue gas sources.

Most analyses otherwise indicate the expected inverse relationship of biofuel cost with algal or lipid productivity, with the minimum calculated biofuel BESP attainable under normal conditions being around \$1 L<sup>-1</sup>. Whilst productivity can be increased through using concentrated nutrient and CO<sub>2</sub> waste sources, the economic viability of large-scale MCT for biofuel production is nonetheless contingent on (a) a significant decrease in costs, and specifically equipment costs in the case of photobioreactors or running costs in the case of algal ponds, and/or (b) public policy intervention. Moreover, global large-scale algal biofuel production is limited by the long-term availability of phosphorus. In view of this, future focus should perhaps be on sustainable nutrient recovery.

## **ACKNOWLEDGEMENTS**

This work was made possible by the support of a National Priorities Research Programme (NPRP) grant from the Qatar National Research Fund (QNRF), grant reference number NPRP 6-1436-2-581. The statements made herein are solely the responsibility of the authors.

## References

- [1] Judd S, van den Broeke LJP, Shurair M, Kuti Y, Znad H. Algal remediation of CO<sub>2</sub> and nutrient discharges: A review. *Water Research*. 2015;87:356-66.
- [2] Pires JCM, Alvim-Ferraz MCM, Martins FG, Simões M. Carbon dioxide capture from flue gases using microalgae: Engineering aspects and biorefinery concept. *Renewable and Sustainable Energy Reviews*. 2012;16:3043-53.
- [3] Shen Y. Carbon dioxide bio-fixation and wastewater treatment via algae photochemical synthesis for biofuels production. *RSC Adv*. 2014;4:49672-722.
- [4] Pires JCM, Alvim-Ferraz MCM, Martins FG, Simões M. Wastewater treatment to enhance the economic viability of microalgae culture. *Environmental Science and Pollution Research*. 2013;20:5096-105.
- [5] Kesaano M, Sims RC. Algal biofilm based technology for wastewater treatment. *Algal Research*. 2014;5:231-40.
- [6] Sutherland DL, Howard-Williams C, Turnbull MH, Broady PA, Craggs RJ. Enhancing microalgal photosynthesis and productivity in wastewater treatment high rate algal ponds for biofuel production. *Bioresource Technology*. 2015;184:222-9.
- [7] Quiroz Arita CE, Peebles C, Bradley TH. Scalability of combining microalgae-based biofuels with wastewater facilities: A review. *Algal Research*. 2015;9:160-9.
- [8] Hoh D, Watson S, Kan E. Algal biofilm reactors for integrated wastewater treatment and biofuel production: A review. *Chemical Engineering Journal*. 2016;287:466-73.
- [9] Lam MK, Lee KT. Microalgae biofuels: A critical review of issues, problems and the way forward. *Biotechnology Advances*. 2012;30:673-90.
- [10] Mehrabadi A, Craggs R, Farid MM. Wastewater treatment high rate algal ponds (WWT HRAP) for low-cost biofuel production. *Bioresource Technology*. 2015;184:202-14.
- [11] Chen G, Zhao L, Qi Y. Enhancing the productivity of microalgae cultivated in wastewater toward biofuel production: A critical review. *Applied Energy*. 2015;137:282-91.
- [12] Fresewinkel M, Rosello R, Wilhelm C, Kruse O, Hankamer B, Posten C. Integration in microalgal bioprocess development: Design of efficient, sustainable, and economic processes. *Eng Life Sci*. 2014;14:560-73.
- [13] Zaimes GG, Khanna V. Microalgal biomass production pathways: evaluation of life cycle environmental impacts. *Biotechnol Biofuels*. 2013;6:88.
- [14] Usher PK, Ross AB, Camargo-Valero MA, Tomlin AS, Gale WF. An overview of the potential environmental impacts of large-scale microalgae cultivation. *Biofuels*. 2014;5:331-49.
- [15] Sandino J, Crawford G, Fillmore L, Kinnear D. Energy Efficiency in Wastewater Treatment in North America: A WERF Compendium of Best Practices and Case Studies of Novel Approaches. *Proceedings of the Water Environment Federation*. 2010;2010:3333-46.
- [16] Orfield ND, Keoleian GA, Love NG. A GIS based national assessment of algal bio-oil production potential through flue gas and wastewater co-utilization. *Biomass and Bioenergy*. 2014;63:76-85.
- [17] Zhang Y, Liu X, White MA, Colosi LM. Economic evaluation of algae biodiesel based on meta-analyses. *International Journal of Sustainable Energy*. 2015:1-13.
- [18] Doshi A, Pascoe S, Cogle L, Rainey TJ. Economic and policy issues in the production of algae-based biofuels: A review. *Renewable and Sustainable Energy Reviews*. 2016;64:329-37.
- [19] Acién Fernández FG, González-López CV, Fernández Sevilla JM, Molina Grima E. Conversion of CO<sub>2</sub> into biomass by microalgae: how realistic a contribution may it be to significant CO<sub>2</sub> removal? *Appl Microbiol Biotechnol*. 2012;96:577-86.
- [20] Acién FG, Fernández JM, Magán JJ, Molina E. Production cost of a real microalgae production plant and strategies to reduce it. *Biotechnology Advances*. 2012;30:1344-53.

- [21] Sun A, Davis R, Starbuck M, Ben-Amotz A, Pate R, Pienkos PT. Comparative cost analysis of algal oil production for biofuels. *Energy*. 2011;36:5169-79.
- [22] Quinn JC, Davis R. The potentials and challenges of algae based biofuels: A review of the techno-economic, life cycle, and resource assessment modeling. *Bioresource Technology*. 2015;184:444-52.
- [23] Kang Z, Kim B-H, Ramanan R, Choi J-E, Yang J-W, Oh H-M, et al. A Cost Analysis of Microalgal Biomass and Biodiesel Production in Open Raceways Treating Municipal Wastewater and under Optimum Light Wavelength. *Journal of Microbiology and Biotechnology*. 2015;25:109-18.
- [24] Rezvani S, Moheimani NR, Bahri PA. Techno-economic assessment of CO<sub>2</sub> bio-fixation using microalgae in connection with three different state-of-the-art power plants. *Computers & Chemical Engineering*. 2016;84:290-301.
- [25] Manganaro JL, Lawal A. CO<sub>2</sub> Life-Cycle Assessment of the Production of Algae-Based Liquid Fuel Compared to Crude Oil to Diesel. *Energy & Fuels*. 2016;30:3130-9.
- [26] Rickman M, Pellegrino J, Hock J, Shaw S, Freeman B. Life-cycle and techno-economic analysis of utility-connected algae systems. *Algal Research*. 2013;2:59-65.
- [27] Delrue F, Setier PA, Sahut C, Cournac L, Roubaud A, Peltier G, et al. An economic, sustainability, and energetic model of biodiesel production from microalgae. *Bioresource Technology*. 2012;111:191-200.
- [28] Davis RE, Fishman DB, Frank ED, Johnson MC, Jones SB, Kinchin CM, et al. Integrated Evaluation of Cost, Emissions, and Resource Potential for Algal Biofuels at the National Scale. *Environmental Science & Technology*. 2014;48:6035-42.
- [29] Xin C, Addy MM, Zhao J, Cheng Y, Cheng S, Mu D, et al. Comprehensive techno-economic analysis of wastewater-based algal biofuel production: A case study. *Bioresource Technology*. 2016;211:584-93.
- [30] Slade R, Bauen A. Micro-algae cultivation for biofuels: Cost, energy balance, environmental impacts and future prospects. *Biomass and Bioenergy*. 2013;53:29-38.
- [31] Delrue F, Li-Beisson Y, Setier PA, Sahut C, Roubaud A, Froment AK, et al. Comparison of various microalgae liquid biofuel production pathways based on energetic, economic and environmental criteria. *Bioresource Technology*. 2013;136:205-12.
- [32] Ramos Tercero EA, Domenicali G, Bertucco A. Autotrophic production of biodiesel from microalgae: An updated process and economic analysis. *Energy*. 2014;76:807-15.
- [33] Rizwan M, Lee JH, Gani R. Optimal design of microalgae-based biorefinery: Economics, opportunities and challenges. *Applied Energy*. 2015;150:69-79.
- [34] Hernández-Calderón OM, Ponce-Ortega JM, Ortiz-del-Castillo JR, Cervantes-Gaxiola ME, Milán-Carrillo J, Serna-González M, et al. Optimal Design of Distributed Algae-Based Biorefineries Using CO<sub>2</sub> Emissions from Multiple Industrial Plants. *Industrial & Engineering Chemistry Research*. 2016;55:2345-58.
- [35] Nagarajan S, Chou SK, Cao S, Wu C, Zhou Z. An updated comprehensive techno-economic analysis of algae biodiesel. *Bioresource Technology*. 2013;145:150-6.
- [36] Beal CM, Stillwell AS, King CW, Cohen SM, Berberoglu H, Bhattarai RP, et al. Energy Return on Investment for Algal Biofuel Production Coupled with Wastewater Treatment. *Water Environment Research*. 2012;84:692-710.
- [37] Batten D, Beer T, Freischmidt G, Grant T, Liffman K, Paterson D, et al. Using wastewater and high-rate algal ponds for nutrient removal and the production of bioenergy and biofuels. *Water Science & Technology*. 2013;67:915.
- [38] Gouveia L, Graça S, Sousa C, Ambrosano L, Ribeiro B, Botrel EP, et al. Microalgae biomass production using wastewater: Treatment and costs. *Algal Research*. 2016;16:167-76.

- [39] Sheehan J, Dunahay T, Benemann J, Roessler P. Look Back at the U.S. Department of Energy's Aquatic Species Program: Biodiesel from Algae; Close-Out Report. Office of Scientific and Technical Information (OSTI); 1998.
- [40] Davis R, Aden A, Pienkos PT. Techno-economic analysis of autotrophic microalgae for fuel production. *Applied Energy*. 2011;88:3524-31.
- [41] Richardson JW, Johnson MD, Outlaw JL. Economic comparison of open pond raceways to photo bio-reactors for profitable production of algae for transportation fuels in the Southwest. *Algal Research*. 2012;1:93-100.
- [42] Brownbridge G, Azadi P, Smallbone A, Bhave A, Taylor B, Kraft M. The future viability of algae-derived biodiesel under economic and technical uncertainties. *Bioresource Technology*. 2014;151:166-73.
- [43] Norsker N-H, Barbosa MJ, Vermuë MH, Wijffels RH. Microalgal production — A close look at the economics. *Biotechnology Advances*. 2011;29:24-7.
- [44] Blanken W, Cuaresma M, Wijffels RH, Janssen M. Cultivation of microalgae on artificial light comes at a cost. *Algal Research*. 2013;2:333-40.
- [45] Jonker JGG, Faaij APC. Techno-economic assessment of micro-algae as feedstock for renewable bio-energy production. *Applied Energy*. 2013;102:461-75.
- [46] Mu D, Min M, Krohn B, Mullins KA, Ruan R, Hill J. Life Cycle Environmental Impacts of Wastewater-Based Algal Biofuels. *Environmental Science & Technology*. 2014;48:11696-704.
- [47] Arbib Z, Ruiz J, Álvarez-Díaz P, Garrido-Pérez C, Barragan J, Perales JA. Long term outdoor operation of a tubular airlift pilot photobioreactor and a high rate algal pond as tertiary treatment of urban wastewater. *Ecological Engineering*. 2013;52:143-53.
- [48] Sutherland DL, Howard-Williams C, Turnbull MH, Broady PA, Craggs RJ. Frequency of CO<sub>2</sub> supply affects wastewater microalgal photosynthesis, productivity and nutrient removal efficiency in mesocosms: implications for full-scale high rate algal ponds. *Journal of Applied Phycology*. 2014;27:1901-11.
- [49] Sutherland DL, Turnbull MH, Broady PA, Craggs RJ. Effects of two different nutrient loads on microalgal production, nutrient removal and photosynthetic efficiency in pilot-scale wastewater high rate algal ponds. *Water research*. 2014;66:53-62.
- [50] Sutherland DL, Turnbull MH, Craggs RJ. Increased pond depth improves algal productivity and nutrient removal in wastewater treatment high rate algal ponds. *Water Research*. 2014;53:271-81.
- [51] Sutherland DL, Howard-Williams C, Turnbull MH, Broady PA, Craggs RJ. Seasonal variation in light utilisation, biomass production and nutrient removal by wastewater microalgae in a full-scale high-rate algal pond. *J Appl Phycol*. 2013;26:1317-29.
- [52] Li Y, Chen Y-F, Chen P, Min M, Zhou W, Martinez B, et al. Characterization of a microalga *Chlorella* sp. well adapted to highly concentrated municipal wastewater for nutrient removal and biodiesel production. *Bioresource Technology*. 2011;102:5138-44.
- [53] Posadas E, García-Encina P-A, Soltau A, Domínguez A, Díaz I, Muñoz R. Carbon and nutrient removal from centrates and domestic wastewater using algal–bacterial biofilm bioreactors. *Bioresource Technology*. 2013;139:50-8.
- [54] Ledda C, Romero Villegas GI, Adani F, Ación Fernández FG, Molina Grima E. Utilization of centrate from wastewater treatment for the outdoor production of *Nannochloropsis gaditana* biomass at pilot-scale. *Algal Research*. 2015;12:17-25.
- [55] Morales-Amaral MdM, Gómez-Serrano C, Ación FG, Fernández-Sevilla JM, Molina-Grima E. Production of microalgae using centrate from anaerobic digestion as the nutrient source. *Algal Research*. 2015;9:297-305.



- [56] Bohutskyi P, Liu K, Nasr LK, Byers N, Rosenberg JN, Oyler GA, et al. Bioprospecting of microalgae for integrated biomass production and phytoremediation of unsterilized wastewater and anaerobic digestion centrate. *Appl Microbiol Biotechnol*. 2015;99:6139-54.
- [57] He S, Xue G. Algal-based immobilization process to treat the effluent from a secondary wastewater treatment plant (WWTP). *Journal of Hazardous Materials*. 2010;178:895-9.
- [58] Ramos Tercero EA, Sforza E, Morandini M, Bertucco A. Cultivation of *Chlorella protothecoides* with Urban Wastewater in Continuous Photobioreactor: Biomass Productivity and Nutrient Removal. *Appl Biochem Biotechnol*. 2013;172:1470-85.
- [59] Passell H, Dhaliwal H, Reno M, Wu B, Ben Amotz A, Ivry E, et al. Algae biodiesel life cycle assessment using current commercial data. *Journal of Environmental Management*. 2013;129:103-11.
- [60] Ramachandra TV, Durga Madhab M, Shilpi S, Joshi NV. Algal biofuel from urban wastewater in India: Scope and challenges. *Renewable and Sustainable Energy Reviews*. 2013;21:767-77.
- [61] Mata TM, Martins AA, Caetano NS. Microalgae for biodiesel production and other applications: a review. *Renewable and sustainable energy reviews*. 2010;14:217-32.
- [62] Coons JE, Kalb DM, Dale T, Marrone BL. Getting to low-cost algal biofuels: A monograph on conventional and cutting-edge harvesting and extraction technologies. *Algal Research*. 2014;6:250-70.
- [63] Ventura J-RS, Yang B, Lee Y-W, Lee K, Jahng D. Life cycle analyses of CO<sub>2</sub>, energy, and cost for four different routes of microalgal bioenergy conversion. *Bioresource Technology*. 2013;137:302-10.
- [64] Richardson JW, Johnson MD, Lacey R, Oyler J, Capareda S. Harvesting and extraction technology contributions to algae biofuels economic viability. *Algal Research*. 2014;5:70-8.
- [65] Beal CM, Gerber LN, Sills DL, Huntley ME, Machesky SC, Walsh MJ, et al. Algal biofuel production for fuels and feed in a 100-ha facility: A comprehensive techno-economic analysis and life cycle assessment. *Algal Research*. 2015;10:266-79.
- [66] Sawaengsak W, Silalertruksa T, Bangviwat A, Gheewala SH. Life cycle cost of biodiesel production from microalgae in Thailand. *Energy for Sustainable Development*. 2014;18:67-74.
- [67] Richardson JW, Johnson MD. Economic viability of a reverse engineered algae farm (REAF). *Algal Research*. 2014;3:66-70.
- [68] Zhang B, Chen S. Optimization of culture conditions for *Chlorella sorokiniana* using swine manure wastewater. *Journal of Renewable and Sustainable Energy*. 2015;7:033129.
- [69] Ríos SD, Torres CM, Torras C, Salvadó J, Mateo-Sanz JM, Jiménez L. Microalgae-based biodiesel: Economic analysis of downstream process realistic scenarios. *Bioresource Technology*. 2013;136:617-25.
- [70] Amer L, Adhikari B, Pellegrino J. Technoeconomic analysis of five microalgae-to-biofuels processes of varying complexity. *Bioresource Technology*. 2011;102:9350-9.
- [71] Bravo-Fritz CP, Sáez-Navarrete CA, Herrera-Zeppelin LA, Varas-Concha F. Multi-scenario energy-economic evaluation for a biorefinery based on microalgae biomass with application of anaerobic digestion. *Algal Research*. 2016;16:292-307.
- [72] Taylor B, Xiao N, Sikorski J, Yong M, Harris T, Helme T, et al. Techno-economic assessment of carbon-negative algal biodiesel for transport solutions. *Applied Energy*. 2013;106:262-74.
- [73] Amanor-Boadu V, Pfromm PH, Nelson R. Economic feasibility of algal biodiesel under alternative public policies. *Renewable Energy*. 2014;67:136-42.
- [74] Hein L, Leemans R. The Impact of First-Generation Biofuels on the Depletion of the Global Phosphorus Reserve. *AMBIO*. 2012;41:341-9.

- [75] Zhao Z, Song X, Wang Y, Wang D, Wang S, He Y, et al. Effects of algal ponds on vertical flow constructed wetlands under different sewage application techniques. *Ecological Engineering*. 2016;93:120-8.
- [76] Badhe N, Saha S, Biswas R, Nandy T. Role of algal biofilm in improving the performance of free surface, up-flow constructed wetland. *Bioresource Technology*. 2014;169:596-604.
- [77] Bilanovic, D., Holland, M., Armon, R. Microalgal CO<sub>2</sub> sequestering - modeling microalgae production costs. *Energy Conversion and Management*. 2012; 58:104-109.
- [78] Fortier M-OP, Sturm BS: Geographic analysis of the feasibility of collocating algal Biomass production with wastewater treatment plants. *Environ Sci Technol*. 2012; 46:11426–11434.
- [79] Al Ketife A., Judd S, and Znad H. Optimization of cultivation conditions for combined nutrient removal and CO<sub>2</sub> fixation in a batch photobioreactor. *Journal of Chemical Technology and Biotechnology*, 2016, in press.
- [80] Al Ketife A., Judd S, and Znad H. A mathematical model for carbon fixation and nutrient removal by an algal photobioreactor. *Chemical Engineering Science*, 2016. 153: 354-362.
- [81] Al Ketife A., Judd S, and Znad H. Synergistic effects and optimization of nitrogen and phosphorus concentrations on the growth and nutrient uptake of a freshwater *Chlorella vulgaris*. *Environmental technology*, 2016, in press.
- [82] Gao F., Yang Z, Li C, Wang Y, Jin W, Deng Y. Concentrated microalgae cultivation in treated sewage by membrane photobioreactor operated in batch flow mode. *Bioresource technology*, 2014. 167: p. 441-446.
- [83] Sepúlveda C, Acién FG, Gómez C, Jiménez-Ruiz N, Riquelme C, Molina-Grima E. Utilization of centrate for the production of the marine microalgae *Nannochloropsis gaditana*. *Algal Research*, 2015. 9: 107-116.
- [84] Sacristán de Alva M, Luna-Pabello VM, Cadena E, Ortiz E. Green microalga *Scenedesmus acutus* grown on municipal wastewater to couple nutrient removal with lipid accumulation for biodiesel production. *Bioresource technology*, 2013. 146: 744-748.

# The cost benefit of algal technology for combined CO<sub>2</sub> mitigation and nutrient abatement

Judd, Simon J.

2016-12-30

Attribution-NonCommercial-NoDerivatives 4.0 International

---

Judd SJ, Al Momani FA, Znad H, Al Ketife AM, The cost benefit of algal technology for combined CO<sub>2</sub> mitigation and nutrient abatement, Renewable and Sustainable Energy Reviews, Volume 71, May 2017, pp. 379-387

<http://dx.doi.org/10.1016/j.rser.2016.12.068>

*Downloaded from CERES Research Repository, Cranfield University*