

## **Application of an on-line soil bulk density sensor for site specific cultivation**

**S.A.M, Shamal <sup>1 2\*</sup>, Saad A. Alhwaimel<sup>2</sup> and Abdul M. Mouazen<sup>2</sup>**

<sup>1</sup> *GeoInfo Fusion Ltd, Cranfield, Bedford, MK43 0DG*

<sup>2</sup> *Cranfield Soil and AgriFood Institute, Cranfield University, Cranfield, MK43 0AL, UK.*

### **Abstract**

Tillage is the most energy consuming operation in the primary production in agriculture. The majority of farmers worldwide adopt homogeneous tillage operations to optimise crop establishment, reduce weeds and compaction, where soil disturbance took place across the entire field including areas where no soil preparation is needed. This practice consumes high energy and leads to decrease soil resistance to water and air erosion. This paper investigates the potential of a previously developed on-line soil bulk density (BD) sensor for the delineation of management zones for site specific tillage. The on-line sensor consisting of a multi-sensor platform pulled by a tractor was used to measure soil BD in two experimental fields with potato in East Anglia, UK. It consisted of a load cell to measure subsoiler draught, a wheel gauge to measure depth and a visible and near infrared (vis-

---

\* Corresponding author: GeoInfo Fusion Ltd, Cranfield, Bedfordshire, MK43 0DG, UK.  
Email address: shamal.mohammed@gmail.com (Shamal S.A.M.)

NIR) spectrophotometer for the measurement of moisture content (MC). Based on these three on-line measured parameters, BD was calculated using a previously developed model with a hybrid numerical and multivariate statistical analysis. The packing density (PD) was then calculated for all on-line measured points as a function of BD and clay content (CC). Maps of soil BD and PD were developed, and both fields were divided into management zones with different tillage recommendations.

Results showed that the on-line BD sensor can map not only the spatial distribution in BD but enable estimation of PD too. Classifying the PD into three compaction classes revealed that only 4.8% of the field needs aggressive tillage (primary and secondary tillage) and about 34.8% of the field requires harrowing or surface loosening with a cultivator (reduced tillage), while the remaining area of the field do not need any sort of tillage. Virtual calculations of fuel consumption and CO<sub>2</sub> emission in one field based on the three PD classes confirmed that site specific tillage would significantly reduce energy consumption and CO<sub>2</sub> emission, as compared to reduced and conventional tillage practices. By this it can be concluded that the on-line multi sensor platform for the assessment of PD holds a great potential for mapping and managing soil compaction site specifically. A future study is needed to relate soil compaction to actual plant growth and yield, and evaluate cost of production and practical limitations of this approach.

*Keywords: Packing Density, Site specific tillage, Multi-sensor*

## 1 Introduction

The increasing world population, changing diet and climate change are the main challenges facing modern agriculture to produce sufficient food, feed and fuel. As a result, there is a growing consensus within our global community that the protection of natural resources and implementation of environmentally and economically sound agriculture practices is of the utmost priority. Under the Thematic Strategy for Soil Protection, a soil framework directive prepared by the European Commission (EU Framework Directive 232, 2006) has considered soil compaction as one of soil threats. Together with erosion, organic matter decline, contamination, salinisation, soil biodiversity loss, sealing, landslides and flooding, compaction occurs in specific risk areas, which must be identified and treated according to the framework directive.

Soil compaction is a major problem in the current food production system (Hamza and Anderson, 2005), as it hinders plant growth and reduces yield, increase soil erosion and water pollution. It increases production cost due to reduction in land productivity, input loss and increase in energy consumption by tillage to eliminate compaction and prepare the soil to a proper seedbed. Bulk Density (BD) is the most common parameter used as an indicator for soil compaction for all soils (Hakansson and Lipiec, 2000 and Mouazen and Ramon, 2006; Quraishi and Mouazen, 2013a) and indeed several studies have shown relationship between BD and crop yield (Negi et al., 1981; Pabin et al., 1991; Czyz, 2004). Recently, Packing Density (PD) has gained attention as an advanced indicator for soil compaction (Jones et al., 2003; Tobias and Tietje, 2007), as it is defined as a composite index of BD and clay content (CC). It was originally developed by Renger (1970) to describe soil compaction for the German soil mapping manual. So far, PD was not explored as a parameter to indicate the need for tillage site specifically.

One of the major limitations that affect successful management of soil is the huge spatial variability of soil properties (including compaction) within a field. However, the current practice for conventional and reduced tillage is that farmers and growers used to cultivate the whole field uniformly, as a way to manage the risk of soil compaction, reduce fuel consumption and improve soil quality. Variable cultivation approach will offer many economic and environmental benefits to farmers and growers through reductions in the volume of disturbed soil. Therefore, there is a need to map the spatial variation in soil compaction (Mouazen et al., 2003), at sufficient sampling resolution to allow tillage equipment to respond to this variation and treat compacted zones only. One of the promising technologies to overcome within field variability in soil compaction is on-line soil sensors (Hemmat and Adamchuk, 2008, Mouazen et al., 2005a), capable of collecting high number of samples (Kuang and Mouazen, 2013), which also allow for rapid and cost-effective analysis and enable simultaneous estimation of a variety of soil properties including BD and CC (Mouazen et al., 2009).

The majority of studies reported in the literature on mapping soil compaction with on-line sensors were based on measurement of draught (e.g., Godwin, 1975; Al-Janobi, 2000; Andrade-Sánchez et al., 2007) or penetration resistance (e.g., Tekin et al., 2008; Tobackci et al., 2010). More advanced studies realised the importance of soil moisture on penetration resistance so that a multi-sensor approach was introduced to account for the influence of moisture content (MC) (Sun et al., 2006). Mouazen and Ramon (2002) proposed a methodology to map the spatial variation in soil compaction referred to as BD with high sampling resolution, based on on-line multi-sensor platform. This was based on a hybrid modelling approach of finite element analysis and multiple linear regression analyses to establish a model to predict BD as a function of draught of a soil cutting tool (subsoiler), depth and soil moisture content, which was later expanded to the majority of soil textures (Quraishi and Mouazen, 2013b). A recent study by Naderi-Boldaji et al.

(2016) developed empirical models to predict soil relative density from measurements of horizontal penetrometer resistance and MC in a wide range of soil textures. Authors did not account for particle size distribution in their estimation, and their hypothesis was that the model coefficient would be texture dependent when soil compaction is expressed as BD. So far, no on-line measurement of PD was reported in the literature, to provide data to develop recommendations for variable tillage.

The aim of this study is to map with high sampling resolution the spatial variability in soil PD in two fields in the UK using the on-line multi-sensor platform of Mouazen and Ramon (2006). The scope was to divide these two fields into management zones with different crop limiting indexes for variable cultivation approach based on the degree of compaction within a field.

## **2 Materials and methods**

### **2.1 On-Line multi-sensor platform**

The on-line multi-sensor platform designed and developed by Mouazen (2006) was used (Fig. 1) in this study (Quraishi and Mouazen, 2013b). It consists of a subsoiler that penetrates the soil to the required depth, making a trench, whose bottom is smoothed due to the downwards forces acting on the subsoiler. An optical probe was attached to the backside of the subsoiler chisel to acquire soil spectra in diffuse reflectance mode from the smooth bottom of the trench (Mouazen et al., 2005b). The retrofitted subsoiler was attached to a frame, which was mounted onto the three point linkage of a tractor. An AgroSpec mobile, fibre type, vis–NIR spectrophotometer (tec5 Technology for Spectroscopy, Oberursel, Germany) with a measurement range of 305–2200 nm was used to measure soil spectra in diffuse reflectance mode. A single-ended shear beam load cell

with a maximum capacity of 90 kN (Griffith Elder & Company Ltd., Suffolk, UK) for the measurement of draught and a draw wire linear sensor (Penny & Giles Controls Ltd., Dorset, UK) connected to a wheel gauge for the measurement of subsoiler depth were used in combination with the vis-NIR moisture sensor for the measurement of soil BD. More detailed information about data acquisition can be found in Quraishi and Mouazen (2013b).

## **2.2 Experimental sites and on-line measurement**

Two test sites with potato crop production were measured in this work, namely, Thetford field (3.5 ha) with a clay loam soil texture (43.1% sand, 29.5% silt and 27.4% clay) and Wypemere field (peatland of 4 ha) with a silty clay soil texture (5.1% sand, 45.3% silt and 49.6% clay) in Cambridgeshire, UK. On-line measurement with the multi-sensor platform (Fig. 1) was performed in parallel transects to the tramlines. The length of transects depended on the dimension of the field. However, a constant gap of about 10 m was kept between neighbouring transects. Measurement was carried out at an average speed of 2 km h<sup>-1</sup>.

In Wypemere field it was decided to carry out the on-line soil measurement after soil preparation with ordinary tillage, which included mouldboard ploughing followed by seed bed preparation. In Thetford field, the on-line measurement took place in compacted soil directly after crop harvest and before any tillage operation, where soils are supposed to have higher BD (compacted), compared to Wypemere field (cultivated). This *a priori* planned measurement was to show differences in soil compaction and comparing tillage needs in compacted and recently disturbed (non-compacted) soil conditions.

Before on-line measurement took place, 70 soil samples from both sites (35 samples per field) were collected from randomly selected points for the development of calibration models of vis-NIR spectrophotometer. This sample set was designated as the calibration set. Another 40 soil samples (19 samples from Thetford field and 21 samples from Wypemere field) were collected from both fields from randomly selected points during the on-line measurement from the bottom of trenches opened by the on-line sensor at about 15 cm depth (Table 1). These samples were used as a prediction set for the validation of the on-line measurement. The sample positions were carefully recorded using a digital global positioning system (DGPS) (EZ-Guide 250, Trimble, USA). Around 200g of soil was collected from each sample and kept in a refrigerator at 4°C until laboratory analysis.

### **2.3 Laboratory chemical and physical analyses**

Gravimetric soil MC was determined by oven drying of the soil samples at 105 °C for 24 h (BS EN 13040:2007), which was also used to calculate BD (BS EN 13041:2011). The soil texture was determined by measuring the particle size distribution (PSD) by sieving and sedimentation method (BS 7755 Section 5.4:1998). Texture class was determined according to the United State Department of Agriculture (USDA) classification system. Soil OC was measured by a TrusSpecCNS spectrometer (LECO Corporation, St. Joseph, MI, USA) using the Dumas combustion method (BS EN 7755:1995). Sample statistics of the measured soil properties are shown in Table 1.

### **2.4 Laboratory optical measurement**

Each soil sample was dumped into a glass container and mixed well. Big stones and plant residue were excluded (Mouazen et al., 2005b). Then each soil sample was placed into

three petri dishes, which were 2 cm deep and 2 cm in diameter. The soil in the petri dish was shaken and pressed gently before levelling with a spatula. A smooth soil surface ensures maximum diffuse light reflection and high signal-to-noise ratio (Mouazen et al., 2005b). The soil samples were scanned with the same AgroSpec portable spectrophotometer used during the on-line field measurement. A 100% white reference was used before scanning. A total of 10 scans were collected from each cup, and these were averaged in one spectrum.

## **2.5 Calibration models of on-line visible and near infrared sensor**

Spectra pre-treatment preceded the development of vis–NIR calibration models of MC and CC. The vis–NIR spectra were first reduced to 371–2150 nm to eliminate the noise at both edges of spectrum. Spectra were further reduced by averaging three successive points in the visible range, and 15 points in the near infrared range (Kuang and Mouazen, 2013). Savitzky–Golay smoothing, maximum normalisation and first derivation (Martens and Naes, 1989) were successively carried out using Unscrambler 7.8 software (Camo Inc., Oslo, Norway). The pre-treated spectra and the laboratory chemical measurement values were used to develop calibration models for MC and CC. The 70 samples (35 sample each) collected from the two test fields before the on-line measurement (Table 2) were gathered with other samples collected previously from two other fields with vegetable crop production in the UK (Aldhumayri, 2012) to develop calibration models for MC and CC. Partial least squares (PLS) regression analysis with leave-one-out cross-validation was used to develop all models using Unscrambler 7.8 software (Camo Inc., Oslo, Norway). The resulting calibration models of MC and CC were further validated using the remaining 40 samples of the prediction set collected during the on-line measurement (Table 2) based on on-line collected spectra. However, this paper will not deal with



validation of the vis-NIR measurement of soil properties, as validation was reported in previous work (Mouazen et al., 2014).

## 2.6 Derivation of on-line measured bulk density

Mouazen and Ramon (2009) developed a calibration function (Eq. (1)) for on-line assessment of BD in  $\text{Mg m}^{-3}$ , as a function of MC in kg/kg, subsoiler draught (D) in kN and depth (d) in m, which was valid for light soils, e.g., loamy sand, loam, silt loam, and silt soils.

$$BD = \left( \sqrt[3]{\frac{D + 21.36MC - 73.9313d^2}{1.6734}} \right) \times (1.255 - 0.772 MC) \quad (1)$$

Eq. (1) has been generalised to cover majority of soil textures, by developing a correction factor (CF) for each soil texture class (Quraishi and Mouazen, 2013b). Equation (1) was used in this study to calculate BD for Wypemere and Theltford fields, considering CF values of 0.27 and 0.079 for silty clay and clay loam soils, respectively.

## 2.7 Calculation of packing density

Kaufmann et al. (2010) correlated optimum ( $BD_{opt}$ ) and limiting ( $BD_{lim}$ ) values of bulk density with clay content (Eqs. 2 and 3), to refer to optimum condition for root growth and conditions, where root growth is limited (stopped or reduced growth).

$$209 \quad \quad \quad BD_{opt} = 1.493 - 0.00564 \text{ CC} \quad (2)$$

$$210 \quad \quad \quad BD_{lim} = 1.778 - 0.00673 \text{ CC} \quad (3)$$

211

212 Where  $BD_{opt}$  is optimum bulk density for root growth ( $\text{g cm}^{-3}$ ),  $BD_{lim}$  limiting bulk density  
 213 for root growth ( $\text{g cm}^{-3}$ ) and CC is clay content (%).

214 They also convert  $BD_{opt}$  and  $BD_{lim}$  values into respective values of optimum packing  
 215 density ( $PD_{opt}$ ) and limiting packing density ( $PD_{lim}$ ), confirming that the PD is a more  
 216 suitable indicator for compaction and crop growth. Finally, they establish critical ranges  
 217 for PD values in regard to crop growth (Table 3).

218 The following formula developed by Renger (1970) was used to calculate PD, indicating  
 219 soil compaction for soils with known CC:

220

$$221 \quad \quad \quad PD = BD + 0.009 \text{ CC} \quad (4)$$

222

223 where PD is packing density (-), BD is bulk density ( $\text{g cm}^{-3}$ ) measured by on-line sensor  
 224 (Equation 1) and CC is clay content (weight-%) measured by online sensor.

225 Soil BD was calculated according to Eq. (1), where MC was obtained with the on-line vis-  
 226 NIR spectroscopy measurement. Soil CC was also predicted using the on-line vis-NIR  
 227 measured soil spectra that is transferred into CC content using PLS calibration models. By  
 228 substituting on-line predicted BD and CC into Eq. (4), PD was calculated for both fields.

229

230

## **2.8 Geostatistical analysis and mapping**

Semi-variogram analysis was carried out using Vesper 1.63 software developed by the Australian Centre for Precision Agriculture (Minasny et al., 2005). Exponential models were adopted for all properties to calculate semi-variance, since it resulted in the lowest root mean square error of prediction. Using the semi-variogram data, maps of MC, CC, BD, and PD, based on all on-line measured points in the two fields were developed with ordinary kriging using ArcGIS ArcMap (ESRI ArcGISTM version 10, CA, USA). The PD maps were classified into five categories to reflect conditions for crop growth based on the value of PD as suggested by Kaufmann et al (2010) (Table 3).

## **3 Results and discussion**

### **3.1 Variation in on-line measurement soil properties**

The BD measurement was carried out in the two study fields by using the on-line multi-sensor platform consisting of draught (measured with a load cell), depth (measured with a wheel gauge) and MC sensor based on vis-NIR spectroscopy. Equation 1 was used to calculate the BD, based on on-line measured D, d and MC. Since texture affects the values of BD derived with Eq. (1), CF developed by Quraishi and Mouazen (2013a) was used to correct for BD for the soil texture classes of the two fields (Table 4). In Wypemere field, with a silty clay soil type, low BD (average BD =  $0.884 \text{ Mg m}^{-3}$ ) was measured, which is attributed to the recent tillage carried out before the on-line measurement took place. Tillage prior to planting temporarily decreases bulk density on the surface (USDA, 2015). However, large variation in BD can be observed in this field with a standard deviation (SD) of  $0.145 \text{ Mg m}^{-3}$ , which is larger than that of Thetford field (SD =  $0.118 \text{ Mg m}^{-3}$ ). This spatial variation in BD is mainly attributed to texture variation, since the soil in this

255 field was loose when the on-line measurement took place. It is worth noting that BD  
 256 decreases with increasing CC and vice versa (Abramson et al., 2002). In Thetford field of a clay  
 257 loam soil, higher BD (average BD =  $1.340 \text{ Mg m}^{-3}$ ) is measured, as compared to that in  
 258 Wypemere field, as Thetford field had not received any tillage before the on-line  
 259 measurement took place (Fig. 2). However, MC in Thetford field was smaller than that in  
 260 Wypemere field (Fig. 3). Also Thetford field shows higher within field spatial variability  
 261 in bulk density (ranging from  $1.69$  to  $0.876 \text{ Mg m}^{-3}$ ). The north western part of the field  
 262 (top right) shows higher BD compared to the south eastern part.

263 There was no clear visual spatial similarity between BD maps (Fig. 2) and MC (Fig. 3)  
 264 maps in both fields. Distinguished spatial similarity between MC and CC can be observed,  
 265 particularly in Wypemere field at the northern half of the field. This can be attributed to  
 266 the strong correlation exists between CC and MC, since the higher the CC the higher is the  
 267 water holding capacity of the soil (Nelson and Miller, 1992; Mouazen et al., 2014). In fact,  
 268 Wypemere field is almost divided into two distinguished parts, with the northern (top) half  
 269 having almost double the CC as compared to the Southern (bottom) half. This is the  
 270 reason why this field still shows large range of BD variation, although the soil was  
 271 prepared to a fine tithe before the on-line measurement took place. Since the northern half  
 272 of the Wypemere field (Fig. 4) has a high CC reaching up to 50%, BD in this half is also  
 273 small and is much smaller than that of the Southern half (Fig. 2), which explains that in  
 274 fields with recently prepared soils, the on-line soil sensor can be used to map variation in  
 275 soil texture. Further research is needed to confirm this statement. In contrast, the southern  
 276 half of the field has low CC, and this is correctly reflected in higher BD measured with the  
 277 on-line soil sensor (Fig. 2). However, the spatial similarity between BD and CC maps in  
 278 Thetford field is minimal, which can be attributed to the variation of BD density that is  
 279 attributed to variation in soil compaction rather than texture. For example, although the  
 280 north western corner of the Thetford field has the highest CC (Fig. 4), the highest BD was

measured at this corner of the field (Fig. 2) indicating high soil compaction as a result of access use of agricultural machinery during the cropping season. Therefore, PD that takes into consideration soil texture (clay content) when assessing BD is important to consider and evaluate as a replacement of BD.

### **3.2 Packing density classes and virtual tillage requirement**

The PD values were calculated for all data points collected with the on-line sensor in the two sites based on on-line measured BD and CC (Eq. 4). The maps of PD for both fields are shown in Fig. 5. The PD map developed for the Wypemere field (Fig. 5) shows almost perfect homogeneous but loose soil across the entire area of the field. This is the beauty of the PD compared to BD for the assessment and mapping of soil compaction, where variability in CC is taken into consideration. In fact, the inclusion of CC in the PD calculation by Eq. 4 leads to exclude the influence of CC on the spatial distribution of soil compaction when BD is measured after soil tillage (Fig. 2). The low PD measured with the on-line compaction sensor in the Wypemere field after tillage indicates tillage effect in loosening the soil and create non-compacted medium for optimum condition for crop growth. The almost perfect uniform spatial distribution of PD is a good indicator to prove the on-line multi-sensor platform used in this study to be a reliable and accurate tool to quantify and map the spatial variability in soil compaction indicated as PD.

In Thetford field, the spatial distribution of PD shows a completely different picture, demonstrating much larger variability, as compared to that in Wypemere field. In this field PD values reached up to 1.82, indicating a sever soil compaction. Remarkably, the PD of 95% of Thetford field area is smaller than 1.7, which indicates optimum soil condition for the root to grow according to the classes assigned by Kaufmann et al. (2010) in Table 4.

305 Only less than 5% of the field area is of a PD range more than 1.7. Kaufmann et al. (2010)  
306 reported that the optimum PD for plant growth is around 1.55 and the compaction will  
307 gradually increase (crop growth reduce) with the increase in  $PD > 1.7$ , where the plant  
308 growth can be severely affected. Also other studies associated PD values  $> 1.75$  with  
309 heavy compaction and values  $< 1.40$  with no compaction. Tobias and Tietje (2007) found  
310 PD values between 1.6 and 1.8 to indicate a critical state of compaction. Based on  
311 Kaufmann et al. (2010) and Tobias and Tietje (2007) classification of PD in regards to  
312 crop growth, we assume the following three classes of soil compaction in respect to the  
313 need for tillage:

314 1-  $PD \geq 1.7$ : here soils are considered as extremely compacted and needs aggressive  
315 tillage operations (e.g., conventional tillage consisting of primary and secondary  
316 tillage).

317 2- PD is in the range of 1.55 – 1.7: only reduced tillage is sufficient (e.g., surface  
318 loosening with a cultivator or surface harrowing). Areas in the field with PD  
319 values below 1.6 indicate no need for tillage.

320 3-  $PD \leq 1.55$ : Here no tillage is needed as compaction is below the limit of crop  
321 growth.

322 Adopting this classification system of tillage needs in Thelford field, where no tillage  
323 were implemented before the on-line measurement, indicates that only 4.8% of the field  
324 would need aggressive conventional tillage (primary and secondary tillage) and about  
325 34.8% ( $PD = 1.55 - 1.7$ ) of the field would require harrowing or surface loosening  
326 (reduced tillage). However, with the current uniform tillage practice, farmers would  
327 cultivate the entire area of the Thetford field with conventional tillage. If the farmer is to  
328 adopt site specific tillage, as suggested above 95 % of the field would receive no or  
329 minimum soil disturbance by tillage (using current no-till or min-till practice), which  
330 would reduce the amount of fuel consumption by at least 50% for the large proportion

(95%) of the field, as well as reducing soil disturbance. Therefore, the cost of production will be reduced by saving fuel and operational time for tillage in addition to reducing soil susceptibility to erosion by adopting no-tillage or reduced tillage practice in 95% of the field area.

Furthermore, this approach if validated with a larger number of fields could also be recommended for variable depth cultivations. For example, we may assume the following tillage depth ranges for different PD classes; deep cultivation (30 cm) for a  $PD \geq 1.8$ , medium deep cultivation (20 cm) for PD values between 1.7-1.82, shallow cultivation (7 cm) for a PD range of 1.55 – 1.7 and no till for a  $PD \leq 1.55$ . Uniform depth cultivation is the only available option where spatial variations in soil compaction within the field are not possible to map. The on-line sensor used in the current work for mapping PD opens new research and practical opportunities for managing soil compaction by providing the best recommendation of tillage system (conventional, reduce, no-till), and configurations of tillage depth based on the degree of soil compaction of different parts within a field.

### **3.3. Potential benefits of site specific tillage**

Having calculated the area per PD class (Table 5) for both fields, the next step is to calculate the potential economic and environmental benefit of site specific tillage as compared to conventional and reduce tillage practices. Stajanko et al (2009) compared the diesel consumption for field operations in conventional tillage and reduced tillage system. Authors show that reduced tillage consumes about 50% less fuel (35-39 L ha<sup>-1</sup>) and produces less carbon emissions (96-107 kg ha<sup>-1</sup>) than conventional tillage (68-82 L ha<sup>-1</sup> and 188-225 kg/ha<sup>-1</sup>, respectively). In order to evaluate the benefits of the site specific tillage proposed in the current work, we compare three different tillage scenarios for

Thetford field only: 1) The entire area of the field is cultivated using uniform conventional tillage 2) The entire area of the field is cultivated using reduced uniform tillage and 3). Site specific tillage is adopted based on the above three classes for tillage proposed in the current work (Table 6). We assumed the average fuel consumption and carbon emission of 37 L ha<sup>-1</sup> and 101.5 kg CO<sub>2</sub> ha<sup>-1</sup>, respectively for reduced tillage and 75 L ha<sup>-1</sup> and 206.5 kg CO<sub>2</sub> ha<sup>-1</sup>, respectively, for conventional tillage. For site specific tillage, PD classes of 1.55-1.7 and larger than 1.7 will be treated as reduce tillage and conventional tillage classes, respectively. Classes of PD smaller than 1.55 are considered as no tillage treatments. Examining Table 6 reveals that site specific tillage would potentially consumes the smallest amount of diesel, while producing the smallest CO<sub>2</sub> emission. The total fuel consumption per field were 57,89, 129,5 and 262.5 L calculated for site specific tillage, reduce tillage and conventional tillage, respectively (Table 6). The site specific tillage would consume 44% and 22% diesel, and produce the same percentage of CO<sub>2</sub> emission of that of reduce tillage and conventional tillage, respectively. For CO<sub>2</sub> emission, however, there is a need for further field trails to validate this assumptions and provide robust evidence on cost benefits of variable intensity and depth cultivations in term of fuel saving, operational time, disturbed soil volume and practicality for farmers and growers.

#### **4 Conclusions**

An on-line multi-sensor and data fusion approach is adopted to determine the spatial variation in soil bulk density (BD), moisture content (MC) and clay content (CC) to map the variation in packing density (PD) as indicator for the soil compaction. Maps of PD with five classes are developed in two fields, one measured before tillage and the other one measured after tillage. Results allowed the following conclusions to be drawn:



379 Examining the on-line visible and near infrared (vis–NIR) spectroscopy measurement  
380 output revealed that strong correlations exist between MC and CC, which is in line with  
381 previous reports available in the literature. Clear spatial similarity between CC and BD  
382 maps was observed only in one field whose soil was cultivated before the on-line  
383 measurement took place. Variability in BD in this field was mainly attributed to variability  
384 in texture, as compaction was eliminated by tillage.

385 Classifying PD into three classes reported in the literature revealed that significant part of  
386 the compacted field may well be suitable for the crop to grow without the need for tillage.  
387 However, we proposed a refined PD classification system, consisted of three classes to be  
388 used as guidelines for tillage selection. We have assumed that by applying this into the  
389 compacted study field indicated that only 4.8% of the field needs aggressive tillage  
390 (primary and secondary tillage) and about 34.8% of the field requires harrowing or surface  
391 loosening with a cultivator (reduced tillage), while the remaining area of the field do not  
392 need any sort of tillage. Virtual calculations of fuel consumption and CO<sub>2</sub> emission based  
393 on the three PD classes confirmed that site specific tillage would significantly reduce  
394 energy consumption and CO<sub>2</sub> emission, as compared to the reduced and conventional tillage  
395 practices.

396 This findings support the final conclusion of this work that multi-sensor and data fusion  
397 approach is a useful approach for the implementation of site specific tillage based on the  
398 actual degree of the compaction measured in the soil with the on-line multi-sensor  
399 platform used in the current work. This approach potentially will reduce fuel consumption  
400 and also reduce greenhouse emissions. However, detailed field trials and a larger number  
401 of fields are necessary to provide robust evidence to quantify the economic and  
402 environmental benefit of site specific tillage, as alternative to the uniform cultivation. The

403 future study needs to validate the current findings by field studies relating soil compaction  
404 to actual plant growth, cost of production and practical limitations of this approach.

405

406 **Acknowledgment:**

407 This research was sponsored by the ICT-AGRI under the European Commission's ERA-  
408 NET scheme under the 7<sup>th</sup> Framework Programme and the UK Department of Environment,  
409 Food and Rural Affairs (contract Nr: IF0208). The research received fund for FarmFUSE  
410 project entitled Fusion of multi-source and multi-sensor information on soil and crop for  
411 optimised crop production system.

412

413     **References**

- 414     Abramson, L., Lee, T., Sharma, S., Boyce, G. 2002. Slope Stability and Stabilization  
415         Methods. John Wiley & Sons, Inc., New York, The USA.
- 416     Aldhumayri, M.H., 2012. Optimizing position of moisture sensors by mapping of clay  
417         content, moisture content and organic carbon content. MSc by Research Thesis.  
418         Cranfield University, UK, pp. 142.
- 419     Andrade-Sánchez, P., Upadhyaya, S.K., Jenkins, B.M., 2007. Development, construction,  
420         and field evaluation of a soil compaction profile sensor. Transactions of The  
421         American Society of Agriculture and Biological Engineers 50, 719–725.
- 422     British Standards, 2011. Soil improvers and growing media: BS EN 13041:2011.  
423         Determination of physical properties. Dry bulk density, air volume, water volume,  
424         shrinkage value and total pore space. British Standards Institution, UK, pp. 13041.
- 425     British Standards, 2007. Soil improvers and growing media: BS EN 13040:2007. Sample  
426         preparation for chemical and physical tests, determination of dry matter content,  
427         moisture content and laboratory compacted bulk density. British Standards Institution,  
428         UK, pp. 13040.
- 429     British Standards, 1998. Soil quality: BS 7755: Section 5.4: 1998. Part 5: Physical  
430         methods. Section 5.4: Determination of particle size distribution in mineral soil  
431         material - method by sieving and sedimentation. British Standards Institution, UK, pp.  
432         5.

433 British Standards, 1995. BS 7755 Section 3.8: 1995. Determination of dry organic and  
 434 total carbon after dry combustion (elementary analysis)". BSI 389 Chiswick High  
 435 Road, London W4 4AL, UK.

436 Commission of the European Communities, 2006. Directive of the European parliament  
 437 and of the council establishing a framework for the protection of soil and amending  
 438 directive 2004/35/EC. Brussels, available online: [http://eur-lex.europa.eu/legal-](http://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:52006PC0232&from=EN)  
 439 [content/EN/TXT/PDF/?uri=CELEX:52006PC0232&from=EN](http://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:52006PC0232&from=EN), accessed on:  
 440 23/04/2015

441 Czyz, E.A., 2004. Effects of traffic on soil aeration, bulk density and growth of spring  
 442 barley. *Soil Tillage Res.* 79, 153-166

443 Godwin, R. J. (1975). An extended octagonal ring transducer for use in tillage studies.  
 444 *Journal of Agricultural Engineering Research*, **20**, 347-352.

445 Håkansson, I., Lipiec, J., 2000. A review of the usefulness of relative bulk density values  
 446 in studies of soil structure and compaction. *Soil Tillage Res.* 53, 71-85

447 Hamza, M.A., Anderson, W.K., 2005. Soil compaction in cropping systems: A review of  
 448 the nature, causes and possible solutions. *Soil Tillage Res.* 82, 121-145

449 Hemmat, A., Adamchuk, V.I., 2008. Sensor systems for measuring soil compaction:  
 450 Review and analysis. *Comput. Electron. Agric.* 63, 89-103

451 Jones, R.J.A., Spoor, G., Thomasson, A.J., 2003. Vulnerability of subsoils in Europe to  
 452 compaction: A preliminary analysis. *Soil Tillage Res.* 73, 131-143

453 Kaufmann, M., Tobias, S., Schulin, R., 2010. Comparison of critical limits for crop plant  
 454 growth based on different indicators for the state of soil compaction. J. Plant Nutr.  
 455 Soil Sci. 173, 573-583

456 Kuang, B., Mouazen, A.M., 2013. Effect of spiking strategy and ratio on calibration of on-  
 457 line visible and near infrared soil sensor for measurement in European farms. Soil  
 458 Tillage Res. 128, 125-136

459 Martens, H. and Naes, T. (1989). Multivariate calibration. 2nd ed. John Wiley & sons,  
 460 Chichester, UK

461 Minasny, B., McBratney, A.B., Whelan, B.M., 2005. Vesper 1.62 Spatial prediction  
 462 software for precision agriculture. Australian Centre for Precision Agriculture, The  
 463 University of Sydney, McMillan Building A05, NSW 2006

464 Mouazen, A.M., Alhwaimel, S.A., Kuang, B., Waine, T., 2014. Multiple on-line soil  
 465 sensors and data fusion approach for delineation of water holding capacity zones for  
 466 site specific irrigation. Soil Tillage Res. 143, 95-105

467 Mouazen, A.M., Anthonis, J., Ramon, H., 2005a. An automatic depth control system for  
 468 online measurement of spatial variation in soil compaction, part 4: Improvement of  
 469 compaction maps by using a proportional integrative derivative depth controller.  
 470 Biosyst. Eng. 90, 409-418

471 Mouazen, A.M., De Baerdemaeker, J., Ramon, H., 2005b. Towards development of on-  
 472 line soil moisture content sensor using a fibre-type NIR spectrophotometer. Soil  
 473 Tillage Res. 80, 171-183

474 Mouazen, A.M., Ramon, H., 2009. Expanding implementation of an on-line measurement  
 475 system of topsoil compaction in loamy sand, loam, silt loam and silt soils. Soil Tillage  
 476 Res. 103, 98-104

477 Mouazen, A.M., 2006. Soil Survey Device. International publication published under the  
 478 patent cooperation treaty (PCT). World Intellectual Property Organization,  
 479 International Bureau. International Publication Number: WO2006/015463;  
 480 PCT/BE2005/000129; IPC: G01N21/00; G01N21/00.

481 Mouazen, A.M.; Ramon, H. 2002. A numerical-statistical hybrid modelling scheme for  
 482 evaluation of draught requirements of a subsoiler cutting a sandy loam soil, as  
 483 affected by moisture content, bulk density and depth. Soil Tillage Res, 63, 155-165.

484 Mouazen, A.M., Ramon, H., 2006. Development of on-line measurement system of bulk  
 485 density based on on-line measured draught, depth and soil moisture content. Soil  
 486 Tillage Res. 86, 218-229

487 Mouazen, A.M.; Ramon, H., 2009. Expanding implementation of an on-line measurement  
 488 system of topsoil compaction in loamy sand, loam, silt loam and silt soils. Soil Tillage  
 489 Res, 103, 98-104.

490 Mouazen, A.M., Dumont, K., Maertens, K., Ramon, H., 2003. Two-dimensional  
 491 prediction of spatial variation in topsoil compaction of a sandy loam field-based on  
 492 measured horizontal force of compaction sensor, cutting depth and moisture content.  
 493 Soil Tillage Res. 74, 91-102

494 Naderi-Boldaji, M., Weisskopf, P., Stettler, M., Keller, T., 2016. Predicting the relative  
 495 density from on-the-go horizontal penetrometer measurements at some arable top  
 496 soils in Northern Switzerland, Soil Tillage Res 159, 23-32.

497 Negi, S. C., McKyes, E., Raghavan, G. S. V., Taylor, F., 1981. Relationships of field  
498 traffic and tillage to corn yields and soil properties. *J. Terramech.* 18, 81–90.

499 Nelson, J. D.; Miller, D. J., 1992. Expansive soils problem and practice in foundation and  
500 pavement engineering. John Wiley, New York, 259.

501 Pabin, J., Sienkiewicz, J., Wldek, S., 1991. Effect of loosening and compacting on soil  
502 physical properties and sugar beet yield. *Soil Tillage Res.* 19, 345-350

503 Quraishi, M.Z., Mouazen, A.M., 2013a. Development of a methodology for in situ  
504 assessment of topsoil dry bulk density. *Soil Tillage Res.* 126, 229-237

505 Quraishi, M.Z., Mouazen, A.M., 2013b. Calibration of an on-line sensor for measurement  
506 of topsoil bulk density in all soil textures. *Soil Tillage Res.* 126, 219-228

507 Renger, M., 1970. Über den Einfluss der Dränung auf das Gefüge und die  
508 Wasserdurchlässigkeit bindiger Böden. *Mitteilgn. Dtsch. Bodenkundl. Gesellsch.* 11,  
509 23–28.

510 Stajniko, D., Lakota, M., Vučajnk, F. and Bernik, R., 2009. Effects of Different Tillage  
511 Systems on Fuel Savings and Reduction of CO2 Emissions in Production of Silage  
512 Corn in Eastern Slovenia. *Pol. J. Environ. Stud.* 18, 711-716

513 Sun, Y., Ma, D., Schulze Lammers, P., Schmittmann, O. and Rose, M. 2006. On-the-go  
514 measurement of soil water content and mechanical resistance by a combined  
515 horizontal penetrometer, *Soil Tillage Res* 86, 209–217.

516 Tekin, Y., Kul, B., Okursoy, R., 2008. Sensing and 3D mapping of soil compaction.  
517 *Sensors*, 8, 3447-3459.

518 Topakci, M., Unal, I., Canakci, M., Celik, H.K., Karayel, D., 2010. Design of a horizontal  
519 penetrometer for measuring on-the-go soil resistance. *Sensors*. 10, 9337-9348.

520 Tobias, S., Tietje, O., 2007. Modelling experts' judgments on soil compaction to derive  
521 decision rules for soil protection-A case study from Switzerland. *Soil Tillage Res.* 92,  
522 129-143

523 USDA, 2015, Soil Bulk Density/Moisture/Aeration, USDA Natural Resources  
524 Conservation Service. (Online) Available:  
525 [http://www.nrcs.usda.gov/Internet/FSE\\_DOCUMENTS/nrcs142p2\\_053260.pdf](http://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_053260.pdf),  
526 Accessed on: 10/12/2015.



## **Figure Captions**

Figure 1. Multi-sensor platform for the on-line measurement of soil properties (Mouazen et al., 2014).

Figure 2. Full-point bulk density (BD) maps based on exponential variograms shown for Wypemere field (top) and Thetford field (bottom)

Figure 3. Full-point moisture content (MC) maps based on exponential variograms shown for Wypemere field (top) and Thetford field (bottom)

Figure 4. Full-point clay content (CC) maps based on exponential variograms shown for Wypemere field (top) and Thetford field (bottom)

Figure 5. On-line measured packing density (PD) map in two studied fields; Wypemere after cultivation (top) and Thetford before cultivation (bottom)

## Figures



Figure 1. The multi-sensor platform for the on-line measurement of soil properties

(Mouazen et al., 2014).

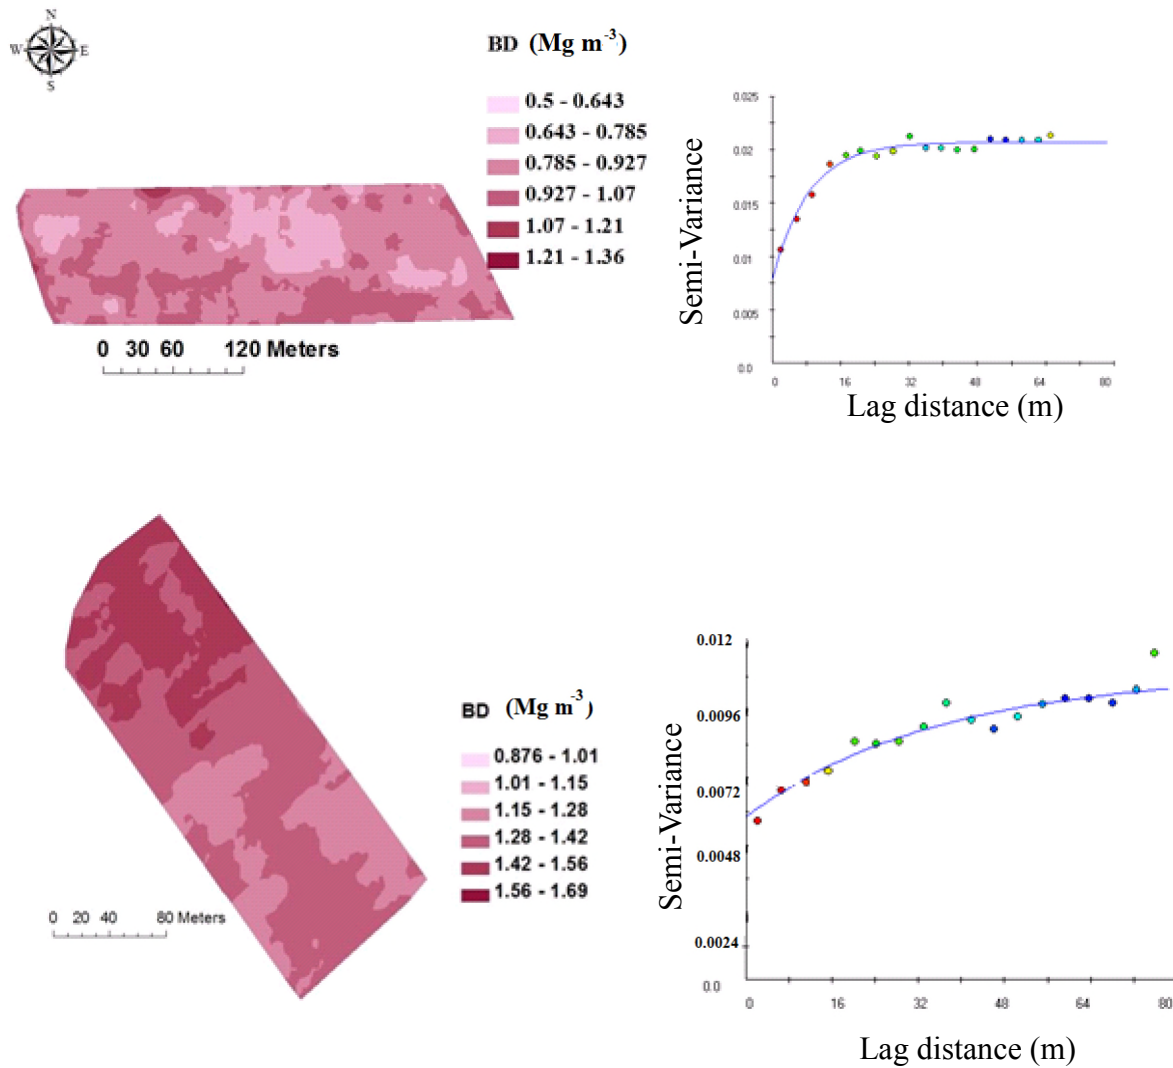


Figure 2. Full-point bulk density (BD) maps based on exponential variograms shown for Wypemere field (top) and Thetford field (bottom)

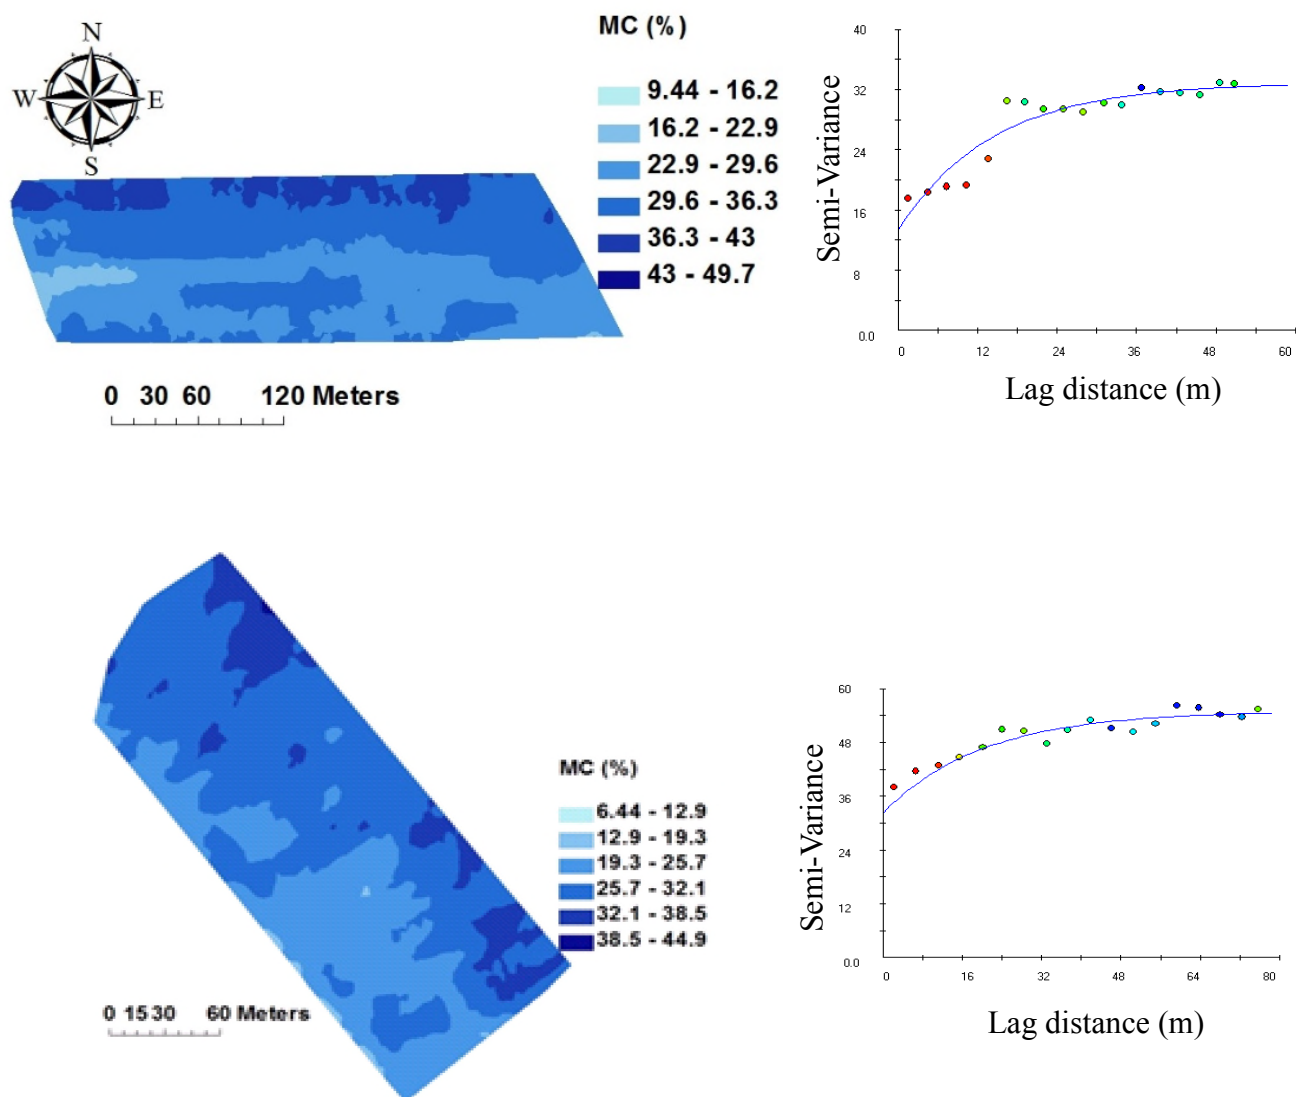


Figure 3. Full-point moisture content (MC) maps based on exponential variograms shown for Wypemere field (top) and Thetford field (bottom)

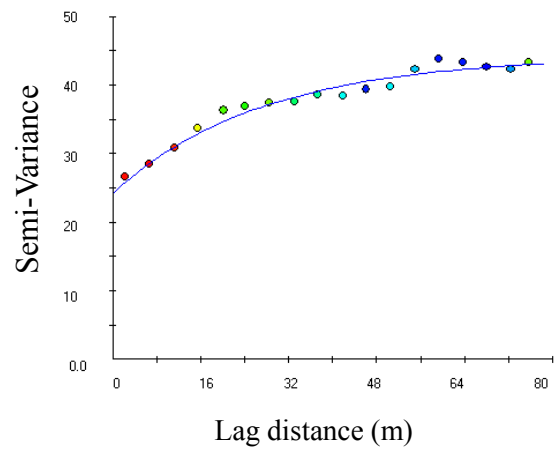
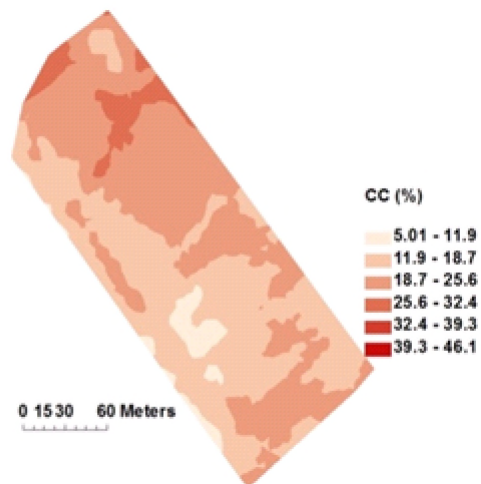
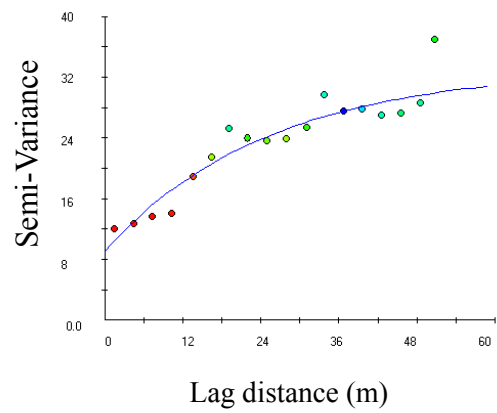
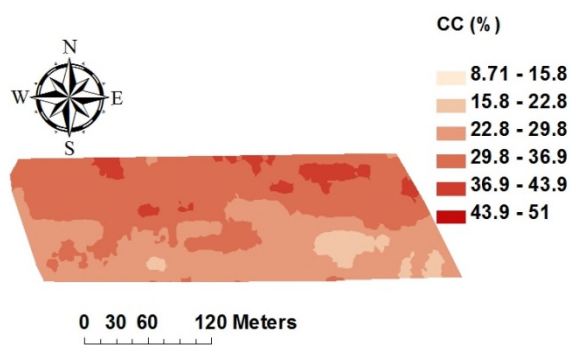


Figure 4. Full-point clay content (CC) maps based on exponential variograms shown for Wypemere field (top) and Thetford field (bottom)

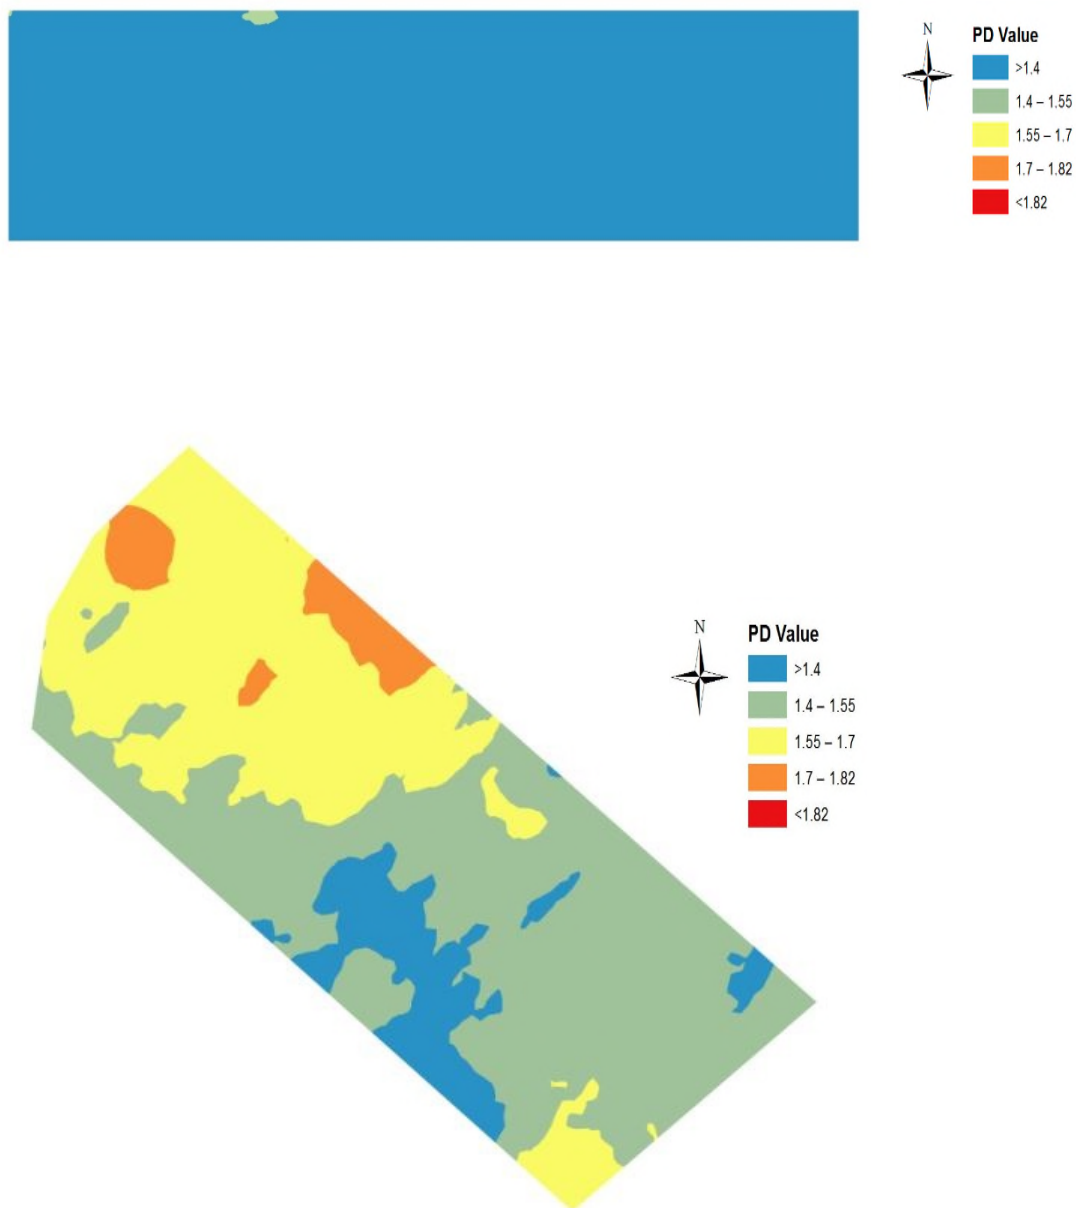


Figure 5. On-line measured packing density (PD) map in two studied fields;  
Wypemere after cultivation (top) and Thetford before cultivation (bottom)

Table 1 Laboratory measured soil moisture content (MC) and organic carbon (OC) using soil samples collected for the two study sites before the on-line measurement.

		OC, %	MC, %
Wypemere	NR	35	35
	Min	1.5	26.87
	Max	17.85	52.81
	Mean	9.472	40.24
	SD	3.416	6.54
Thetford	NR	35	35
	Min	1.068	14.53
	Max	7.107	26.23
	Mean	2.213	19.57
	SD	1.265	3.09

Table 2 Sample statistics of moisture content (MC) and clay content (CC) in the calibration and validation sets for two study sites.

Sites		Calibration set		Validation set	
		MC	CC	MC	CC
Wypemere	NR	167	262	19	19
	Min, %	30.1	22.82	32.57	37.9
	Max, %	45.8	48.08	50.93	57.7
	Mean, %	38.9	35.95	43.16	48.3
	SD %	5.19	6.54	5.59	6.04
Thetford	NR	167	262	21	21
	Min, %	18.4	14.69	17.44	20.2
	Max, %	25.7	35.84	26.23	37.4
	Mean, %	21.9	23.79	21.27	27.2
	SD %	2.27	5.87	2.58	5.75

*SD is standard deviation.*

Table 3: The packing density (PD) classes as related to soil suitability for crop growth  
(Kaufmann et al., 2010)

PD value	Crop growth condition
< 1.40	Below optimum range
1.40-1.55	Lower optimum range
1.55-1.70	Upper optimum range
1.70-1.82	Lower limiting range
> 1.82	Upper limiting range

Table 4 On-line measured bulk density (BD) in the two study sites

Site	CF	BD ( $\text{M gm}^{-3}$ )			
		Min	Max	Mean	SD
Wypemere	0.270	0.500	1.355	0.884	0.145
Thetford	0.079	0.876	1.691	1.340	0.118

*CF is correction factor*



Table 5 Percentage of area for each packing density (PD) class in both Wypemere and Thetford fields, according to classes proposed by Kaufmann et al. (2010)

PD zones	Crop growth condition	Wypemere	Thetford
		Area (%)	Area (%)
< 1.40	Below optimum range	99.9	10.0
1.40-1.55	Lower optimum range	0.1	50.4
1.55-1.70	Upper optimum range	0	34.8
1.70-1.82	Lower limiting range	0	4.8
> 1.82	Upper limiting range	0	0

Table 6 Potential fuel consumption (FC) and carbon dioxide emission (CE) per packing density (PD) class calculated for site specific tillage, reduced tillage and conventional tillage. Calculations were made according to three classes proposed in the current work.

PD class	Site specific tillage			Reduce tillage		Conventional tillage	
	Area (ha)	FC (L ha <sup>-1</sup> )	CE (kg CO <sub>2</sub> ha <sup>-1</sup> )	FC (L ha <sup>-1</sup> )	CE (kg CO <sub>2</sub> ha <sup>-1</sup> )	FC (L ha <sup>-1</sup> )	CE (kg CO <sub>2</sub> ha <sup>-1</sup> )
< 1.55	2.11	0	0	78.07	214.17	158.25	435.72
1.55-1.7	1.22	45.14	123.83	45.14	123.83	91.5	251.93
> 1.7	0.17	12.75	35.105	6.29	17.255	12.75	35.105
Sum	3.5	57.89	158.935	129.5	355.25	262.5	722.75

# Application of an on-line sensor to map soil packing density for site specific cultivation

Shamal, S. A. M.

2016-04-24

Attribution-NonCommercial-NoDerivatives 4.0 International

---

S.A.M. Shamal, Saad A. Alhwaimel, Abdul M. Mouazen, Application of an on-line sensor to map soil packing density for site specific cultivation, Soil and Tillage Research, Volume 162, September 2016, pp78-86

<http://dx.doi.org/10.1016/j.still.2016.04.016>

*Downloaded from CERES Research Repository, Cranfield University*