

Determination and applications of environmental costs at different sized airports ~ aircraft noise and engine emissions

CHERIE LU

*Department of Aviation and Maritime Management, Chang Jung Christian University,
396 Chang Jung Rd. Sec. 1, Kway Jen, Tainan 711, Taiwan (E-mail:
cherie@mail.cju.edu.tw)*

PETER MORRELL

*Air Transport Group, College of Engineering, Cranfield University, Cranfield,
Bedfordshire, MK43 0AL, the United Kingdom (E-mail: p.s.morrell@cranfield.ac.uk)*

Key words: environmental costs, aircraft noise and engine emissions, airport operations

Abstract. With the increasing trend of charging for externalities and the aim of encouraging the sustainable development of the air transport industry, there is a need to evaluate the social costs of these undesirable side effects, mainly aircraft noise and engine emissions, for different airports. The aircraft noise and engine emissions social costs are calculated in monetary terms for five different sized airports, ranging from hub airports to small regional airports. The number of residences within different levels of airport noise contours and the aircraft noise classifications are the main determinants for accessing aircraft noise social costs. The environmental impacts of aircraft engine emissions include both aircraft landing and take-off and 30-minute cruise. The social costs of aircraft emissions

vary by engine type and aircraft category, depending on the damages caused by different engine pollutants on the human health, vegetation, materials, aquatic ecosystem and climate. The results indicate that the relationship appears to be curvilinear between environmental costs and the traffic volume of an airport. The results and methodology of environmental cost calculation could be applied to the proposed European wide harmonised noise charges as well as the social cost benefit analysis of airports.

1. Introduction

Over the years, increasing attention has been paid to the sustainable development of the aviation sector. More and more, environmental and social concerns are posing severe limitations to the growth of the air transport industry. Although the global economic downturn and political turmoil has caused a decline in the number of flights and passengers over the past two years, these concerns remain valid as traffic gets back to its pre-9/11 trend.

It is now widely recognised that the costs of these externalities must be internalised and paid for by the aviation industry and its users (EC 1999, 2002). Two of the most important externalities generated from commercial flights are noise nuisance and aircraft engine emissions. Of these two, noise nuisance has the largest impact on the community surrounding airports, while engine emissions have both local and global impacts.

Noise causes both nuisance and health effects, for instance sleep deprivation. More and more airports in the world, often forced by governments, have applied

different types of noise management measures that range from noise abatement procedures to limits on the total noise allowed. Among these measures are night flight restrictions and curfews, night quotas, and noise charges and penalties. In 1999, only 10 out of the 25 enlarged European Union countries, Norway and Switzerland had some forms of noise charges (Lu 2000); by 2003 all 27 countries had noise related charges (Boeing 2003).

Aircraft engine emissions have extensive impact on human health, vegetation, materials, ecosystem and the climate. Aircraft exhaust pollutants are emitted during landing and take-off (LTO), ground stages and during the cruise mode of flights. Damage is incurred from these pollutants at all flight stages and aircraft are unusual in their injection of pollutants into the upper troposphere and lower stratosphere, resulting in a higher level of global warming than is the case for similar ground level emissions. Compared to the introduction of noise management measures, there are fewer airports applying engine emissions mitigation measures. In 1999, engine emissions charges are in place only at some Swiss and Swedish airports (Morrell & Lu 2000). In 2003, no other airports had introduced these charges (Boeing 2003). These charges are targeted only at local emissions; the International Civil Aviation Organisation (ICAO) is working on measures targeting on the emissions during cruise mode (ICAO 1996, 1998).

Given this context, this paper provides a framework in which to assess the environmental cost of airport operations. The environmental cost consists of noise social costs and aircraft emissions costs. The noise social cost depends heavily on the density of the population surrounding the airport, whilst, engine emissions

vary according to the number of flights and the aircraft types used at an airport. The calculation of environmental costs can be used in various types of analyses. The methodology can serve as a common basis for the determination of unit noise charges in the noise charge calculation formula proposed by the European Commission (EC 2002). Furthermore, the results can be used to assess the environmental impact of airport expansion plans and traffic forecasts. The environmental costs can also be compared with the social and economic benefits of an airport in order to assess the relationship between the airport and the surrounding region. This allows the assessment of whether growth at the airport would result in more environmental cost than it would yield economic benefit.

This paper presents a methodology for calculating the noise and emission social costs. The empirical analysis is carried out for three British airports (London-Heathrow, London-Gatwick and London-Stansted airports) and two Dutch airports (Amsterdam Airport Schiphol and Maastricht Airport). Various applications of the environmental cost results are addressed and investigated. Conclusions are discussed in the final section.

2. Noise social cost estimation: methodology and model

The most commonly used techniques for estimating noise damage costs are hedonic price methods (HPM) and contingent valuation methods (Pearce & Markandya 1989; Lu & Morrell 2001). The former is based on revealed behaviour and the latter on stated preferences. The HPM has been more fully developed and adopted by policy makers (UK DfT 2003; Pearce & Pearce 2000;

Nelson 2004) as apposed to contingent valuation methods (Carlsson et al. 2004).

Hence, the HPM is applied here for calculating the aircraft noise social cost.

This method is based on the household equilibrium marginal willingness to pay. It is used to extract the implicit prices of certain characteristics that determine property values. Examples are location, attributes of the neighbourhood and community, as well as environmental quality (Johansson 1987; Nelson 1980, 1981). For this approach, however, it is necessary to assume that each individual has the same utility function, in order to obtain the unique price estimation for noise impacts (Pearce & Edwards 1979).

By using the hedonic price method, the annual total noise social cost C_n is derived from the following formula:

$$C_n = \sum_i I_{NDI} P_v (N_{ai} - N_0) H_i \quad (1)$$

Where I_{NDI} is the noise depreciation index (NDI) expressed as a percentage; P_v is the annual average house rent in the vicinity of the airport and $I_{NDI} P_v$ is the annual noise social cost per residence per A-Weighted decibel (dB(A)). The noise level above the ambient level is $(N_{ai} - N_0)$, where N_{ai} is the average noise for the i-th section of the noise contour¹; N_0 is the background noise or the ambient noise, the level at which no residents are defined to suffer serious noise disturbance. This is finally multiplied by H_i , the number of residences within the i-th zone of the noise contour.

¹ The definition of noise contour is: *a line of a constant value of a noise index around an airport, due to the noise of a traffic mix of aeroplanes under normal operating conditions and using normal flight paths (ICAO 1988).*

The NDI or the percentage reduction of house price per dB(A) above background noise, is derived from various studies using regression functions. The annual house rent P_v is converted from the average house value in the vicinity of the airport by the mortgage interest rate and the average house lifetime.

It should be noted that the noise level versus annoyance curve takes the form of a non-linear relationship; the higher the level of noise, the increasingly greater annoyance (Finegold et al. 1994; Schultz 1978). Therefore, $I_{NDI}P_v$ in equation (1) is adjusted by the noise versus annoyance function in order to reflect the real noise nuisance imposed on the residents surrounding the airport.

After calculating the aggregate noise social cost, the next question is how to allocate this total external cost to individual flights. The principle of this process should be based on the real impact of noise nuisance on the residents, generated dynamically from each specific flight. The factors influencing the noise impact include aircraft types, engine types, time of a day, flight paths as well as landing and take-off procedures. The reduction in the amount of noise from the LTO for a certain aircraft/engine combination could be considered as the marginal noise nuisance caused by this flight. The corresponding noise index for different aircraft/engine combinations could then be derived (Lu 2000; Swan 1998).

3. Engine emissions social cost estimation: methodology and model

Differences in aircraft operation and engine types, emission rates and airport congestion are considered as important parameters influencing the damage level of pollutants. The air pollution at ground level resulting from the landing and

take-off of flights is considered in this paper along with the climate impacts during the 30-minute cruise stage prior to landing or after take-off, as these phases result in direct impacts within the region surrounding the airport.

The calculation of the engine emissions social cost uses the opposite approach from the calculation of noise costs. First, the social costs for individual aircraft movements with specific engine type and standard flight modes are derived, applying the unit social cost for each pollutant. Second, the annual social cost is determined by summing across the annual aircraft movements and emissions inventory.

F_{ij} , the amount (kilograms) of the j th pollutant emitted during the i th flight mode, can be derived from the following formula:

$$F_{ij} = t_i f_i e_{ij} \quad (2)$$

Where t_i is the time spent during the i th mode (hours); f_i the fuel flow during the i th mode (kg/hr); e_{ij} the emission indices of the j th pollutant during the i th mode (kg pollutant/kg fuel). Equation (3) shows the calculation of C_{ek} , the social cost per flight for the k th engine/aircraft combination (€/flight):

$$C_{ek} = \sum_{j=1}^6 \sum_{i=1}^5 \alpha_i F_{ij} U_j \quad (3)$$

Where α_i is the weight for each mode (depending on the damage multiplier factor: for example 3 for cruise; 1 for the other phases of flight and ground movement, which means the same pollutant causes 3 times larger damage when emitted during cruise (IPCC 1999).); U_j is the unit social cost for the j th pollutant

(€/kg). Five operational modes are calculated separately, which are take-off, climb-out, approach, taxi/idle and cruise. Finally the annual emissions social cost, C_e , is computed as follows:

$$C_e = \sum_k D_k C_{ek} \quad (4)$$

Where D_k is the total number of the annual aircraft landings for the k th engine/aircraft combination.

The unit social costs, U_j , are determined by Lu (2000) and are based on an extensive review of the literature (Pearce & Pearce 2000; Levinson et al. 1998; Eyre et al. 1997; Perl et al. 1997; Mayeres et al. 1996). The mean values of the social costs for each pollutant are taken from previous studies. In the literature, environmental costs are estimated in monetary terms; they are based on the relationship between pollution and damages on human health, vegetation, buildings, climate change and global warming. This method traces the links between air emissions and adverse consequences, considered as the best proved method for evaluating the social cost of emissions (Small & Kazimi 1995).

Pollutants taken into account in the take-off and landing stages of flight are HC, CO, NO_x, SO₂, CO₂ and N₂O. Others such as fine particles are not included due to the uncertainties of their local and global impacts. For the damage caused in cruise, CO₂, CH₄, NO_x and water vapour in conjunction with particles (leading to contrails and the formation of cirrus clouds), have been found to have a significant impact on climate change. The impacts from these emissions are still subject to wide ranges of possible damage, both because of the lack of knowledge

of the physical processes and the different discount rates used to determine present value marginal cost (IPCC 1999; Peper 1994; Schippers 2004). Hence, the cruise damage has been limited to NO_x, for which reasonable estimates of impacts are available within an acceptable range of uncertainty (Archer 1993).

4. Case studies: data and assumptions

Three British airports (London-Heathrow, Gatwick and Stansted airports) and two Dutch airports (Amsterdam Airport Schiphol and Maastricht Airport) are taken as the case studies for the empirical analysis. Based on the aircraft noise classification used at Heathrow Airport, aircraft types are categorised into seven categories, with a representative aircraft type being selected for each of the categories, as shown in Table 1. The various aircraft types for different categories are listed in Appendix A.

(Insert Table 1)

Table 2 presents the aircraft movements by category in 2001 at these five airports. Heathrow has the highest number of aircraft movements, followed by Schiphol, Gatwick, Stansted and Maastricht.

(Insert Table 2)

Tables 3 and 4 show the number of residences within each noise contour zone, which is calculated using the fleet mix and number of movements in 2001. Different noise measurements are used in these two countries: Leq is used in the UK; Kosten Unit (KU) in the Netherlands. Heathrow has more than 100 thousand residences within the 57 Leq noise contour; Schiphol also has around 122

thousand residences located within the 20 Ku noise contour in the vicinity of the airport. The 57 Leq and the 20 Ku noise contours are the lowest noise levels measured. Although Maastricht has the least aircraft movements (Table 2), there are more residences affected by noise nuisance than those at Gatwick and Stansted (Tables 3 and 4).

(Insert Table 3)

(Insert Table 4)

The average NDI value concluded from a number of research papers is within 0.60-0.62% with Noise Exposure Forecast (NEF) as a noise descriptor² (Schipper 2004). KU used in the Netherlands ranges from 20 to 65 KU, which is 1.5 times the range compared to NEF's 20-50. Therefore, the NDI value is adjusted to 0.40% for the calculation of noise social costs at Dutch airports. On the other hand, based on the narrower range of the Leq system, the NDI value is set at 1.00% for the UK airports. The average house prices at the airport area are listed in Table 5. Table 6 presents the unit social costs for each of the pollutants from engine emissions as an average for the local impacts and the climate change impact.

(Insert Table 5)

(Insert Table 6)

5. Case studies: empirical results

The social costs calculation is based on the annual airport movements, the current

² NEF (Noise Exposure Forecast), one of the cumulative noise event measures, reasonably varying between 20-50, was mostly used in the United States prior to the development of the L_{dn} index.

fleet mix and the number of residences annoyed, which means that the cost level varies as the endogenous or exogenous parameters are changed. For example, if airlines reduce the number of flights to an airport, or change the types of engines for some aircraft types, the annual number of movements from the airport will be lower and different levels of emissions are generated. The corresponding environmental cost is different in order to accurately and dynamically reflect the real social cost of aircraft emissions. Furthermore, if the characteristics in the vicinity of the airport changed, the cost level would vary correspondingly. For instance, the more noise insulation investment (recycling the charges collected), the less annoyance the residents would incur. In this case, even with the same number of flights, the perceived noise nuisance of the airport would be reduced.

5.1 Noise social costs

The calculation results of equation (1) for noise social costs at the current aggregate noise level are presented in Table 7. The noise social costs for different aircraft categories at Heathrow vary from €28 per landing for Jetstream to €3,007 for B747-100F/200/300/SP, with the weighted average of €774 per landing and take-off (or €387 per movement). The average noise social cost at Schiphol, although having similar aircraft movements to Heathrow, appears to be €377 per landing, less than half of that at Heathrow. On the other hand, Maastricht, with the least aircraft movements, but situated in a more densely populated area, has higher noise social costs than Gatwick and Stansted.

(Insert Table 7)

5.2 Engine emissions social costs

The social cost of engine emissions has been calculated on the basis of assumptions on engine types and emission rates. These assumptions are necessary because of limitations in data availability and because further complexity in terms of using every actual aircraft/engine combination would not result in significantly greater accuracy. Therefore, substituting the related parameters and data in equations (2), (3) and (4) (ICAO 1995), the average social cost per landing for each aircraft type is shown in Table 8. As the impacts of engine emissions are less airport-specific (or at least little is known on their subsequent dispersion around the airport), the social costs for individual aircraft types are assumed the same for all five airports.

(Insert Table 8)

The figures in Table 8 include not only the social cost at the ground level resulting from the standard LTO procedures, including take-off, climb-out, approach and taxi-idle modes, but also the costs of the emissions from 30 minutes' cruise either prior to landing or following take-off. The engine emissions social costs range from €43 to €4,839 depending on aircraft types.

It should be noted that NO_x is the only cruise emission included, due to the higher uncertainties of other emissions. If other pollutants were incorporated, the cost would be higher. Furthermore, the same unit social cost of NO_x is applied to both ground level and cruise. However, it has been argued that the damage in the upper atmosphere might be 2-4 times the impact of CO₂ alone, as suggested by

IPCC (1999), or 10 times higher than at ground level (INFRAS & IWW 1995). Therefore, the values presented in Table 8 could be considered as a conservative (lower) estimation.

5.3 Environmental costs

The environmental costs here are defined as the aggregation of both noise and engine emissions social costs. From Tables 7 and 8, the environmental costs for five airports are presented in Table 9 and Figure 1. The annual environmental social cost is calculated to be €645 million for Heathrow, followed by Schiphol (€471 million), Gatwick (€161 million), Stansted (€82 million) and Maastricht (€11 million). The results show that the impacts of engine emissions are greater than that of noise, especially at Gatwick and Stansted. From the residents' perspective, noise could be considered as the major issue, with many relatively unaware of the magnitude of the emissions impacts.

(Insert Table 9)

(Insert Figure 1)

Comparing the environmental cost with the traffic volume of an airport, the results for these five airports indicate that the relationship appears to be curvilinear between annual environmental costs and aircraft movements (Figure 2). This implies that the marginal environmental cost is increasing as aircraft movements increase. In other words, adding a certain amount of traffic to a hub airport would cause more environmental damages than that at a regional airport. It should be noted that this is due to the attraction of a larger hub airport for house

and other developments, and thus more social costs.

(Insert Figure 2)

6. Applications of environmental costs

Besides showing the degree of the environmental impacts at various airports, several applications of this result and methodology are presented and discussed in this section. First of all, the methodology of calculating aircraft noise social costs can be used to determine the proposed European wide noise charge levels. Furthermore, the environmental costs valued in monetary terms can form the input of cost-benefit analysis of an airport or an airport system.

This section provides a brief overview of how the results can be applied. However, complete analysis of these applications is beyond the scope of this paper and requires further research. All these applications focus on the influence of an airport on the region and are to be seen from the perspective of a region.

6.1 European wide harmonised aircraft noise charges

One of the main objectives of the EU common transport policy is to promote the sustainable development of transport activities (EC 1999). The use of economic instruments is considered to be an efficient and effective way of improving the environmental performance of an airport (ICAO 1996, 1998; OECD 1998). The EC's proposal for potential harmonised noise charges provides the possibility to modulate aircraft noise charges as a function of environmental impact (ANCAT

1998; EC 2002). This formula for calculating noise charges (C) is as follows (EC 2002):

$$C = C_a \cdot 10^{\frac{(L_a - T_a)}{10}} + C_d \cdot 10^{\frac{(L_d - T_d)}{10}} \quad (5)$$

where:

- C_a and C_d are the unit noise charges at departures and arrivals for the considered airport. They reflect the relative importance of noise emissions at arrivals and departures for the impacted population.
- L_a is the certificated noise levels at the approach measurement points, and L_d is an average of the levels at the flyover and lateral points.
- T_a and T_d are noise thresholds at departures and arrival corresponding to categories of relatively quiet aircraft for the considered airport.

While the certificated noise levels and the noise thresholds are known, no common and transparent method has been developed for calculating the unit noise charges, namely C_a and C_d , at each of the European airports. The methodology of calculating noise social costs can be applied here by deriving the marginal noise impacts of different aircraft categories into a separate departure and arrival index.

Our method has taken into account various theoretical and practical aspects. Firstly, the calculation is based on both the certificated noise levels and the number of residences affected by noise, which is derived from the noise contours around airports. This implies that the methodology has fulfilled the condition that *'noise charges should be proportional to the incremental nuisance for human beings caused by individual aircraft separately at arrival and departure'* (EC

2002). In addition, the same approach could be practically applied to any airport, each with their own traffic and operational characteristics. Finally, for a preliminary analysis, the data needed to calculate the unit charges can be easily obtained for the majority of the European airports.

6.2 Cost-benefit analysis of an airport or an airport system

In the context of sustainability, an airport can only exist if it generates more social and economic benefits to the region or nation than its damages on human beings and the environment. Furthermore, an airport is operating most efficiently when its marginal social benefit is equal to its marginal environmental cost. Any movement beyond this threshold would result in more environmental damage than its generated benefit to the society. The same applies to an airport system. An airport system consists of a few hub and regional airports in a geographically close area³. If the hub airport has reached its threshold, any additional flight would be better allocated to other airports.⁴

So far, the method has not been fully developed for quantifying the economic benefits generated from an airport for the region. However, the existing research indicates that an airport would generate approximately some 1,000 to 1,100 jobs per one million passengers (ACI Europe 1998). This figure, however, does not include the social benefit of an airport (such as accessibility of the region and public obligation).

³ A good example is the London airport system, with five airports in the greater London area. Those are London-Heathrow, Gatwick, Stansted, Luton and City airports.

⁴ With the maximum net benefit achieved if those flights that rely on point-to-point traffic are allocated to the non-hub airports.

The following analysis is done by comparing the economic benefits of an airport, resulting from employment for the region, and their environmental costs for both noise and engine emissions. However, the precise added value of an airport should be evaluated by taking into account all possible influences of an airport on the local communities and the nation. Moreover, other factors, such as external safety and congestion, would also result in environmental costs.

Based on the estimation of the total economic benefits of the case study airports and their environmental costs, Figure 3 shows the marginal economic benefit and marginal environmental cost in relation to aircraft movements by using a regression analysis. This regression analysis has been done on all five airports, two of which are main hubs and three are other airports. It can be argued that a main hub airport and a different type of airport have significantly different characteristics, which makes a general analysis impossible. Due to the size of the sample, it is not feasible to split it and perform a separate analysis on the hubs and on the other airports. Notably, the analysis only serves as an illustration thanks to the limited sample size, and no general conclusions can be drawn from it.

(Insert Figure 3)

This figure shows that the marginal environmental cost is increasing as aircraft movements increase, while the marginal economic benefit is decreasing. The tentative results appear that the two curves intersect at approximately 450,000 movements per year. This is the level at which an airport is operating most efficiently with its marginal economic benefit equal to the marginal environmental cost. By expanding this analysis to include more airports and factors, policy

makers would be able to determine the equilibrium of an airport system and to evaluate any investment or expansion of an airport.

The intersection point in Figure 3 would move to the right if new technology aircraft are introduced that give additional noise and/or emissions benefits (reductions) without increasing real operating costs. This would shift the marginal cost curve down, without a similar downward movement in the marginal benefit line.

7. Conclusions and recommendations

With the European Communities' policy of strengthening market incentives to improve environmental performance (EC 1999), and the EC's proposal for a potential harmonised noise charges (ANCAT 1998; EC 2002), the assessment of the real social costs of externalities is vital for those policies. The methodologies developed in this research paper for evaluating the social costs of both aircraft noise and engine emissions have been applied for different sized airports, each with their own traffic and operational characteristics.

Of all five airports, Heathrow Airport has the highest noise and engine emissions social cost which is the result of its large number of aircraft movements and high population affected by noise. Having a high volume of aircraft movements and a large surrounding population, Schiphol, however, has lower noise and engine emissions social costs than Heathrow. Maastricht has higher noise costs than Gatwick and Stansted, but the least engine emissions costs. The environmental cost, aggregation of noise and engine emissions costs, is calculated

to be €1,779 per landing for Heathrow, followed by Schiphol (€1,219), Gatwick (€651), Stansted (€492) and Maastricht (€237).

The calculation of environmental costs in monetary terms can be applied in a variety of analyses. The method can be used in determining the proposed European unit noise charges. The environmental costs can serve as an input for cost-benefit analysis of an airport and an airport system.

References

ACI Europe (1998) *Creating employment and prosperity in Europe*.

ANCAT (1998) *Transport aircraft noise classification and noise charges*.

ANCAT/45(Inf.)-WP/3, the Abatement of Nuisance Caused by Air Transport, European Civil Aviation Conference, Brussels.

Archer LJ (1993) *Aircraft emissions and the environment: CO_x, SO_x, HO_x & NO_x*. Oxford Institute for Energy Studies.

Boeing (2003) <http://www.boeing.com>.

Carlsson F, Lampi E & Martinsson P (2004) The marginal values of noise disturbance from air traffic: does the time of the day matter? *Transportation Research Part D* 9: 373-385.

EC (1999) *Air transport and the environment: towards meeting the challenges of sustainable development*. Communication from the Commission to the Council, the European Parliament, the Economic and Social Committee and the Committee of the Regions, COM(1999), Commission of the European Communities, Brussels.

EC (2002) *Proposal for a Directive of the European Parliament and of the Council on the establishment of a Community framework for noise classification of civil subsonic aircraft for the purpose of calculating noise charges*. COM(2002), 683 final - amended, Commission of the European Communities, Brussels.

Eyre N J, Ozdemiroglu E, Pearce DW & Steele P (1997) Fuel and location effects on the damage costs of transport emissions. *Journal of Transport Economics and Policy* **31**: 5-24.

Finegold LS, Harris CS & Von Gierke HE (1994) Community annoyance and sleep disturbance: updated criteria for assessing the impacts of general transportation noise on people. *Noise Control Engineering Journal* **42**: 25-30.

Halifax (2002) *House price index*. www.hbosplc.com.

ICAO (1988) *Recommended method for commuting noise contours around airports*. ICAO Circular, Circular 205-AN/1/25, International Civil Aviation Organisation, Montreal.

ICAO (1995) *ICAO engine exhaust emissions data bank*. First edition, Doc 9646-AN/943, International Civil Aviation Organisation, Montreal.

ICAO (1996) *Environmental charges and taxes on International Civil Aviation*. Paper presented by the Secretariat to the 14th Session of the Council, AT-WP/1794, October (Montreal: International Civil Aviation Organisation).

ICAO (1998) *Emission charges and taxes in aviation*. Report of the Focal Point on Charges, Prepared for CAEP/4, International Civil Aviation

- Organisation, The Hague.
- INFRAS & IWW (1995) *External effects of transport*. International Union of Railways (UIC), Paris.
- IPCC (1999) *Aviation and the global atmosphere*. Intergovernmental Panel on Climate Change, Cambridge University Press.
- Johansson P (1987) *The economic theory and measurement of environmental benefits*. Cambridge University Press.
- Levinson DM, Gillen D & Kanafani A (1998) The social costs of intercity transportation: a review and comparison of air and highway. *Transport Reviews* **18**: 215-240.
- Lu C (2000) *Social welfare impacts of environmental charges on commercial flights*. PhD dissertation, Cranfield University.
- Lu C & Morrell P (2001) Evaluation and implication of environmental charges on commercial flights. *Transportation Reviews* **21**: 377-395.
- Maastricht Airport (2002) <http://www.maastrichtaachenairport.nl>.
- Mayeres I, Ochelen S & Proost S (1996) The marginal external costs of urban transport. *Transportation Research Part 1D*: 111-130.
- Morrell P & Lu C (2000) Social costs of aircraft noise and engine emissions – a case study of Amsterdam Airport Schiphol. *Transportation Research Record* **1703**.
- Nelson JP (1980) Airports and property values: a survey of recent evidence. *Journal of Transport Economics and Policy* **14**: 37-52.
- Nelson JP (1981) Measuring benefits of environmental improvements: aircraft

- noise and hedonic prices. *Advances in Applied Microeconomics* **1**: 51-75.
- Nelson JP (2004) Meta-analysis of airport noise and hedonic property values – problems and prospects. *Journal of Transport Economics and Policy* **38**: 1-28.
- OECD (1998) *Efficient transport for Europe: policies for internalisation of external costs*. European Conference of Ministers of Transport, Organisation for Economic Co-operation and Development, Paris.
- Pearce D & Edwards R (1979) The monetary evaluation of noise nuisance: implications for noise abatement policy. *Progress in Environmental Planning and Resource Management* **1**: 207-220.
- Pearce DW & Markandya R (1989) *Environmental policy benefits: monetary valuation*. Organisation for Economic Cooperation and Development, Paris.
- Pearce B & Pearce D (2000) *Setting environmental taxes for aircraft: a case study of the UK*. CSERGE working paper GEC 2000-26.
- Peper J (1994) *Atmospheric effects of aircraft emissions and an investigation of some operational measures to mitigate these effects*. Edited by Fransen, W., Directorate General of Civil Aviation, The Netherlands.
- Perl A, Patterson J & Perez M (1997) Pricing aircraft emissions at Lyon-Satolas Airport. *Transportation Research* **2D**: 89-105.
- Schiphol Group (2002) *Gebruiksplan Schiphol 2001*. The Netherlands.
- Schippers (2004) Environmental costs in European aviation. *Transport Policy* **11**: 141-154.

- Schultz TJ (1978) Synthesis of social surveys on noise annoyance. *Journal of the Acoustical Society of America* **64**: 377-405.
- Small KA & Kazimi C (1995) On the costs of air pollution from motor vehicles. *Journal of Transport Economics and Policy* **29**: 7-32.
- Statistics Netherlands (2002) *Transactions of real estate 2001*. Department of Financial Enterprises, Division of Trade, Transport and Services, Statistics Netherlands, The Netherlands.
- Swan W (1998) Noise per seat. *Unpublished paper, Boeing Commercial Airplane Group*, July.
- United Kingdom Civil Aviation Authority (2002a) *Noise Exposure Contours for Heathrow Airport 2001*. ERCD Report 0201.
- United Kingdom Civil Aviation Authority (2002b) *Noise Exposure Contours for Gatwick Airport 2001*. ERCD Report 0202.
- United Kingdom Civil Aviation Authority (2002c) *Noise Exposure Contours for Stansted Airport 2001*. ERCD Report 0203.
- UK Department for Transport (2003) *Aviation and the environment – using economic instruments*. March 2003.

Appendix A: Aircraft category

| Category | Aircraft type | Category | Aircraft type |
|----------|---------------------------|----------|---------------------|
| 1 | Small props | 4 | B747-400 |
| | Large props | | A340 |
| | | | MD11 |
| 2 | B737-300,400,500 | | |
| | B737-600,700,800 | 5 | B747-100 |
| | B757 | | B747-200 (Ch 2) |
| | BAe146 | | B747-200,300 (Ch 3) |
| | A319,320,321 | | DC10 |
| | Business jet (ch 3) | | Tristar |
| | CRJ Canadair Regional Jet | | |
| | ERJ Embraer EMB 135/145 | 6 | B737-200 (Ch2/3) |
| | F100 | | BAC-11, Tu134 |
| | MD80 | | DC9 |
| | MD90 | | Business Jet (Ch2) |
| 3 | B767-200 | 7 | B707 |
| | B767-300 | | B727 (Ch2/3) |
| | B777 | | DC8 |
| | A300 | | Concorde |
| | A310 | | Tu154 |
| | A330 | | VC10 |

Table 1. Aircraft categorisation

| Category | Aircraft | Representative aircraft |
|----------|--------------------------------------------------------------------|-------------------------|
| 1 | Propeller aircraft | Jetstream 31 |
| 2 | Chapter 3 jets: short haul | B737-300 |
| 3 | Chapter 3 jets: wide-body twins | A310-200 |
| 4 | Chapter 3 jets: 2 nd generation wide body multi-engines | B747-400 |
| 5 | Large chapter 2/3 jets: 1st generation wide-body | B747-100F/200/300 |
| 6 | 2 nd generation twin jets: narrow body twins* | B737-200QN |
| 7 | 1 st generation jets: narrow body multi-engines | B727 |

Note: including Chapter 2 and hushkitted versions.

Table 2. Aircraft movements by category

| Aircraft category | Heathrow | Gatwick | Stansted | Schiphol | Maastricht |
|-------------------|----------|---------|----------|----------|------------|
| 1 | 0.9% | 5.4% | 10.3% | 3.8% | 78.4% |
| 2 | 69.8% | 74.1% | 69.7% | 78.6% | 16.2% |
| 3 | 16.3% | 13.8% | 2.0% | 6.2% | 0.0% |
| 4 | 10.1% | 1.9% | 1.8% | 6.4% | 0.0% |
| 5 | 2.4% | 2.9% | 0.7% | 4.6% | 0.0% |
| 6 | 0.1% | 1.7% | 15.2% | 0.4% | 2.7% |
| 7 | 0.4% | 0.2% | 0.3% | 0.0% | 2.7% |
| Total movements | 463,568 | 252,453 | 169,578 | 456,700 | 59,248 |

Source: UK CAA 2002a,b,c; Schiphol Group 2001 and Maastricht Airport 2002.

*Table 3. Residences within noise contour at Heathrow, Gatwick and Stansted airports**

| Leq level (dBA)** | Heathrow | Gatwick | Stansted |
|----------------------|----------|---------|----------|
| >72 | 653 | 22 | 13 |
| 69~72 | 2,304 | 22 | 13 |
| 66~69 | 6,391 | 87 | 17 |
| 63~66 | 14,522 | 217 | 130 |
| 60~63 | 23,087 | 435 | 391 |
| 57~60 | 57,565 | 1,478 | 435 |
| Total | 104,522 | 2,261 | 1,000 |

Source: UK CAA 2002a,b,c.

Note:

* The average persons per household (2.3), from the UK statistics office, are applied for converting affected population into residences.

** 51 Leq is used as the background noise level for the calculation in the next section. Note the number of residences within the noise contour 57 to 51 Leq is unknown. The inclusion of these would lead to higher noise social costs.

Table 4. Residences within noise contour at Schiphol and Maastricht airports

| Kosten Unit (KU)* | Schiphol | Kosten Unit (KU) | Maastricht |
|----------------------|----------|---------------------|------------|
| >65 | 14 | 40~65 | 0 |
| 60~65 | 33 | 35~40 | 176 |
| 55~60 | 70 | 20~35 | 1,440 |
| 50~55 | 402 | 10~20 | 11,671 |
| 45~50 | 1,675 | | |
| 40~45 | 3,358 | | |
| 35~40 | 3,857 | | |
| 30~35 | 13,539 | | |
| 25~30 | 44,048 | | |
| 20~25 | 55,634 | | |
| Total | 122,630 | Total | 13,287 |

Source: Schiphol Group 2002; Maastricht Airport 2002.

Note: * 10 KU is used as the background noise level for the calculation in the next section. Note the number of residences within the noise contour 20 to 10 KU is unknown. The inclusion of these would lead to higher noise social costs.

Table 5. House prices in 2001

| Airport | House price (€/residence) |
|------------|---------------------------|
| Heathrow | 260,394 |
| Gatwick | 230,130 |
| Stansted | 201,077 |
| Schiphol | 168,000 |
| Maastricht | 151,000 |

Source: Halifax 2002; Statistics Netherlands 2002.

Table 6. Unit social costs of pollutants from engine emissions

| €/kg | HC | CO | NO _x | SO ₂ | CO ₂ | N ₂ O |
|-------------|------|------|-----------------|-----------------|-----------------|------------------|
| Social cost | 3.49 | 0.07 | 9.69 | 51.71 | 0.02 | 1.03 |

Source: Derived from the data listed in Lu & Morrell (2001) and inflated to 2001

values by applying the euro area inflation rates.

Table 7. Noise social cost by aircraft category (2001 €/landing)

| Category | Aircraft type | Heathrow | Schiphol | Gatwick | Stansted | Maastricht |
|------------------|-------------------|----------|----------|---------|----------|------------|
| | | | | | | t |
| 1 | Jetstream 31 | 28 | 14 | 1 | 1 | 14 |
| 2 | B737-300 | 510 | 265 | 19 | 11 | 259 |
| 3 | A310-203 | 831 | 431 | 31 | 17 | 422 |
| 4 | B747-400 | 1,975 | 1,024 | 74 | 41 | 1,003 |
| 5 | B747-100F/200/300 | 3,007 | 1,560 | 113 | 63 | 1,528 |
| 6 | B737-200QN | 2,035 | 1,056 | 76 | 43 | 1,034 |
| 7 | B727 | 2,194 | 1,138 | 82 | 46 | 1,115 |
| Weighted average | | 774 | 377 | 25 | 16 | 111 |

Table 8. Engine emissions social cost by aircraft category

| Category | Representative aircraft type | Engine emissions cost (2001 €/landing) |
|----------|------------------------------|-------------------------------------------|
| 1 | Jetstream 31 | 43 |
| 2 | B737-300 | 389 |
| 3 | A310-203 | 952 |
| 4 | B747-400 | 4,839 |
| 5 | B747-100F/200/300 | 3,581 |
| 6 | B737-200QN | 448 |
| 7 | B727 | 644 |

Table 9. Average and annual environmental cost comparison (2001)

| | Heathrow | Schiphol | Gatwick | Stansted | Maastricht |
|-------------------------------------------|----------|----------|---------|----------|------------|
| Average noise cost (€/landing) | 774 | 377 | 25 | 16 | 111 |
| Annual noise cost (million €) | 179.5 | 86.0 | 3.1 | 1.3 | 3.3 |
| Average emission cost (€/landing) | 1,004 | 842 | 626 | 477 | 126 |
| Annual emission cost (million €) | 465.6 | 384.7 | 158.1 | 80.8 | 7.5 |
| Average environmental cost (€/landing) | 1,779 | 1,219 | 651 | 492 | 237 |
| Annual environmental cost (million €) | 645.1 | 470.7 | 161.2 | 82.1 | 10.8 |

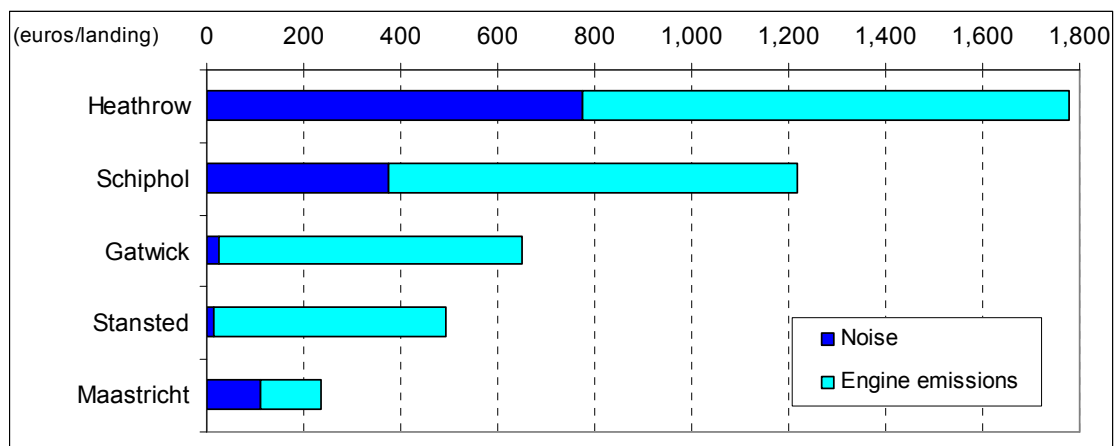


Figure 1. Average environmental cost comparison (2001)

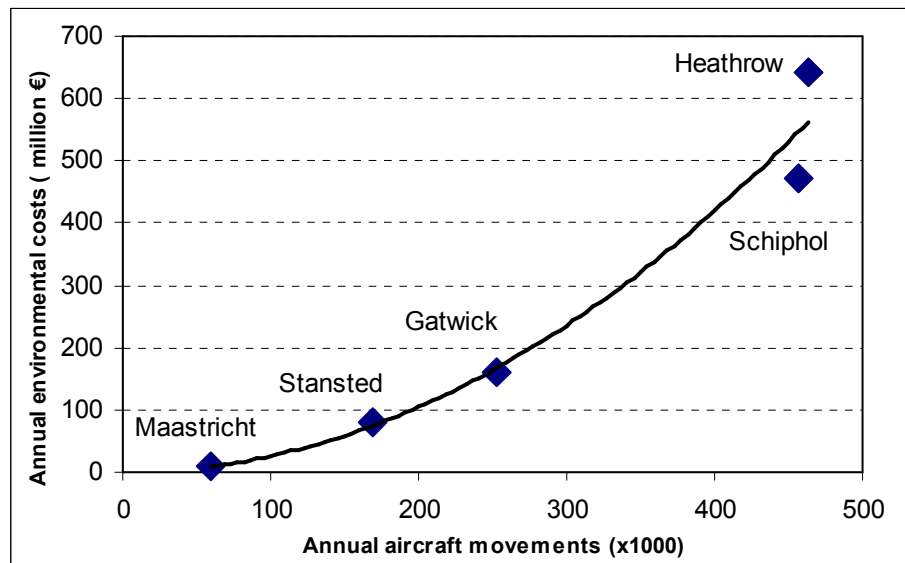


Figure 2. Relationship between environmental costs and aircraft movements
(2001)

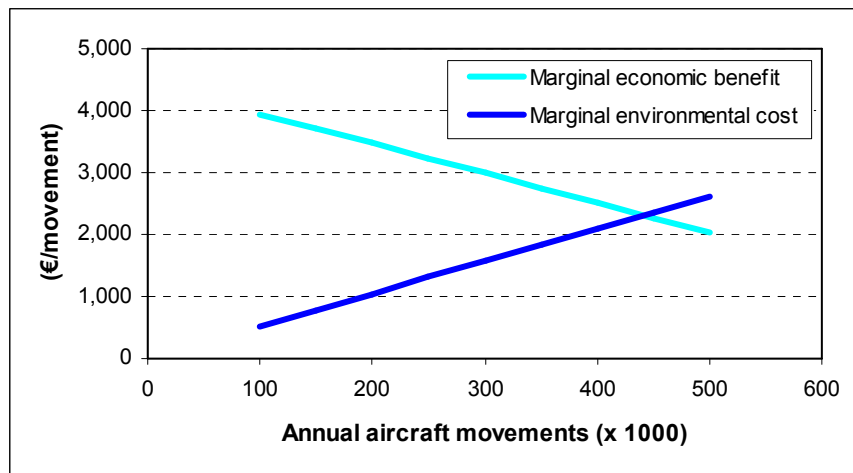


Figure 3. Economic benefit versus environmental cost

Determination and Applications of Environmental Costs at Different Sized Airports – Aircraft Noise and Engine Emissions.

Lu, Cherie

2006-01

The original publication is available at www.springerlink.com

Cherie Lu and Peter Morrell; Determination and Applications of Environmental Costs at Different Sized Airports – Aircraft Noise and Engine Emissions. *Transportation*, Volume 33, Number 1 / January, 2006, pp45-61

<http://dx.doi.org/10.1007/s11116-005-2300-y>

Downloaded from CERES Research Repository, Cranfield University