

# Power to air transportation via hydrogen

ISSN 1752-1416  
Received on 6th April 2020  
Revised 25th June 2020  
Accepted on 23rd July 2020  
E-First on 16th February 2021  
doi: 10.1049/iet-rpg.2020.0414  
www.ietdl.org

Alireza Soroudi<sup>1</sup> ✉, Soheil Jafari<sup>2</sup>

<sup>1</sup>School of Electrical, Electronic Engineering, University College Dublin, Dublin 04, Ireland

<sup>2</sup>Centre for Propulsion Engineering, School of Aerospace, Transport, Manufacturing (SATM), Cranfield University, Cranfield, UK

✉ E-mail: alireza.soroudi@ucd.ie

**Abstract:** This study proposes a framework to analyse the concept of power to hydrogen (P2H) for fuelling the next generation of aircraft. The impact of introducing new P2H loads is investigated from different aspects namely, cost, carbon emission, and wind curtailment. The newly introduced electric load is calculated based on the idea of replacing the busiest international flight route in the Europe, Dublin-London Heathrow, by hydrogen fuel-powered aircraft as a high potential candidate for the next generation of air travel systems to cope with the ambitious targets set in Europe Flight Path 2050 by the Advisory Council for Aeronautics Research in Europe. The simulation is performed on a representative Irish transmission network to demonstrate the effectiveness of the proposed solution.

## Nomenclature

### Constants

$\gamma$	aircraft fuel burn per journey
$\Lambda_b^W$	capacity of wind turbine in bus $b$
$\lambda_D$	load shedding cost coefficient
$\lambda_e$	emission cost coefficient
$\lambda_W$	wind curtailment cost coefficient
$\tau_t$	duration of period $t$ (hours)
$\Xi$	price of investment for P2H plant (€/MW)
$\zeta_b$	0/1 parameter indicating if P2H plant exists in bus $b$

$a_g, b_g, c_g$	thermal power cost coefficients
$B_{bi}$	susceptance of line between bus $b$ and $i$
$D_f$	daily aircraft fuel burn
$d_t$	demand at time $t$
$D_{H_2}$	daily hydrogen demand
$FHV$	fuel heat value
$N_f$	number of flights per day
$N_s$	average number of seats per aircraft
$P_{b,t}^L$	electric demand in bus $b$ at time $t$
$P_{\cos}$	carbon offsetting cost
$P_{ef}$	equivalent jet fuel cost (€/MWh)
$P_f$	jet fuel cost
$RD_g$	ramp down of thermal generator $g$
$RU_g$	ramp up of thermal generator $g$
$w_t$	wind power availability at time $t$

### Variables

$\delta_{i,t}$	angle of bus $i$ at time $t$
$\xi$	capacity of P2H plant, MW
$C_e$	emission cost
$C_f$	fuel cost
$c_{g,t}$	fuel cost of unit $g$ at time $t$
$C_{lsh}$	load shedding cost
$C_{P2H}$	investment cost for P2H plant
$C_{wc}$	wind curtailment cost
$P_{bi,t}^\ell$	power flow in line $\ell$ at time $t$
$P_{b,t}^C$	wind curtailment at bus $b$ and time $t$
$P_{g,t}^G$	power of thermal generator $g$ at time $t$

$P_{b,t}^W$	power of wind turbine in bus $b$ at time $t$
$P_{b,t}^{SH}$	active load shedding at bus $b$ and time $t$
$Pch_t$	extracted power from the grid to produce $H_2$ at $t$
$SOC_t$	state of charge in $H_2$ storage at $t$
$Pdch_t$	discharged power from $H_2$ storage at $t$

### Sets and indices

$\Omega_B$	set of network buses
$\Omega_D$	set of time steps in day $D$
$\Omega_G$	set of thermal generating units
$\Omega_k$	set of segments for linearising the cost function
$\Omega_L$	set of transmission lines


## 1 Introduction

The increased share of renewable energy resources specially non-synchronous technologies such as wind and solar power can create new technical challenges for the power system operators. These challenges include (but not limited to) uncertainty in generation output of RES technologies [1], stability issues due to low inertia [2] and voltage control requirements. The inertia problem is prominent for those countries which are weakly connected to their neighbours with AC interconnection links. As an example, a huge amount of wind is annually curtailed in Ireland due to several technical reasons such as transmission network constraints or stability issues. In 2018, the total wind dispatch down in republic of Ireland and Northern Ireland was 707 GWh [3]. The three main reasons are listed as follows:

- The transmission constraints are related to the thermal limits of transmission lines as well as the  $N - 1$  security requirements. Due to the geographical availability of the wind, most wind turbines are connected to the west and south-west of the country and this increases the chance of wind dispatch-down in Ireland.
- By increasing the penetration level of non-synchronous generations (such as wind turbines), the amount of inject-able wind power to the grid is limited to avoid frequency control problems. The total on-line inertia in the system should be able to provide rapid frequency response in case of a disturbance. To keep the power system safe and secure it is vital to measure and limit the system non-synchronous penetration (SNSP) [4].
- Even if the amount of available on-line inertia is sufficient, the ramp-rates of thermal generating units might be not enough to cope

**Table 1** Literature review of some existing works

Reference	Ship Vehicle	Air transportation	Power flow constraints	SNSP	Device based	System	Distribution/transmission
[13]	✓		no	no		yes	NA
[14]	✓		AC	no		yes	distribution small scale
[15]	✓		no	no		yes	distribution small scale
[16]	✓		no	no	yes		NA
[17]	general		yes	no		yes	transmission
[18]	general		no	no		yes	distribution small scale
[19]	general		no	no	yes		NA
[20]	general		no	no	yes		NA
[21]	✓		no	no	no	no	NA
[22]	general		no	no	yes		NA
proposed model		✓	DC-OPF	yes		yes	transmission-Large scale

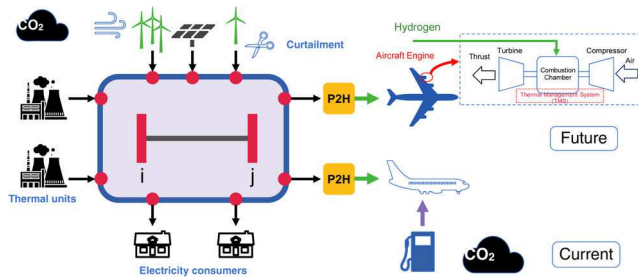**Fig. 1** Framework for future hydrogen based air transportation

with the variations of wind generation and cause wind dispatch-down. The min power generation limit in conventional technologies is another reason for curtailing the available wind power.

Dispatching down the clean energy (and using fossil fuel based technologies) is not in line with the European goals for reducing the greenhouse gas emissions by at least 40% from 1990 levels [5]. Some approaches have been proposed in the literature to reduce the wind curtailment. These methods can be categorised into two main groups:

- Non-wire solutions: in these models, the system operator/regulator tries to use the existing assets and utilise them in a more efficient way [6]. For example, dynamic line rating [7], using distributed series power flow controllers [6] and novel control techniques [8].
- Asset building models: in these models, some transmission lines will be built or upgraded [9]. Investing in energy storage technologies [10] can be included in this group.

Building new assets has been the traditional way of answering technical challenges in energy sector. However, the difficulties in obtaining the public acceptance is a big challenge for the decision makers in energy sector. In this work, the focus is on improving the principals that the power system is operated based on them without the need for upgrading the transmission network. The hydrogen ( $H_2$ ) production has been proposed in the literature to overcome mitigate sub-synchronous oscillation in wind power systems [11] and seasonal storage [12]. Some existing works in the literature are compared in Table 1. The idea of using zero-emission  $H_2$  as an alternative for fossil fuels in transportation sector has received a great deal of attention recently. One of the main drivers for this transition is EU's energy and climate targets for 2030.

### 1.1 Hydrogen-based airplanes

The aviation sector is one the fastest-growing polluters. Forecasts claim that aviation emissions could double in the next three decades even with more fuel-efficient aircraft [23]. So, it is the time to think differently about revolutionary ideas to deal with this challenge. The idea of liquid hydrogen fuel-powered aircraft has

been widely considered in recent years by well-known airliners and manufacturers [24].

Technical feasibility, safety, environmental compatibility and economic viability of liquid hydrogen as an alternative fuel for the next generation of civil aircraft have been confirmed by European Union (EU) researchers from 34 institutions in collaboration with industrial partners like Airbus [25]. The energy density of hydrogen per unit mass is 2.8 times higher than traditional jet fuel. However, the main obstacle is to produce it in quantity from low-carbon energy sources such as wind or nuclear. If this bottle neck is addressed, the aircraft greenhouse gases will be reduced dramatically. This would be a game changer for aircraft manufacturers to meet the severe limitations set in Advisory Council for Aviation Research and Innovation in Europe (ACARE) Flight Path 2050 (e.g. a 75% reduction in  $CO_2$  emissions and a 90% reduction of  $NO_x$  emissions by 2050) [26].

The other advantage of using liquid hydrogen in aviation is its thermal management characteristics as one of the best coolants used in engineering applications. The design of new and next generation of aircraft engines are increasingly complex with higher demands on engines for thrust and power generation resulting in hotter fluids, higher components temperature and higher heat generation, which means critical thermal management issues. So, it is time to think differently about how thermal loads in modern gas turbine engines can be managed. The liquid hydrogen is a very high potential heat sink that could be used in the architecture of thermal management systems for aircraft propulsion [27]. This paper proposes the idea of converting green electricity to hydrogen and supply the fuel need for the next generation of airplanes as shown in Fig. 1. The research gaps are as follows:

- The SNSP impact on  $H_2$  production is not properly investigated
- The energy requirements of future hydrogen based airplanes and their impacts on power systems should be analysed.

The following questions will be answered:

- How much energy do the next generation of airplanes need?
- How capable is the power system to supply those energy needs via green renewable resources?
- How power system-air transportation nexus is achievable using the existing assets?

### 1.2 Contributions

An energy procurement model is proposed and formulated with the following properties:

- Proposing a linear model for procuring  $H_2$  required for air transportation
- Considering the SNSP constraint for a system with high penetration level of non-synchronous generation
- Modelling the environmental impacts of aviation and electricity nexus.
- Modelling flight envelope's energy requirement.

### 1.3 Paper structure

The remainder of this paper is organised as follows. Section 2 presents the proposed model, as well as the main objective function and related constraints. In Section 3, the simulations are carried out on the Irish representative system and the numerical investigations are presented. Finally, the paper concludes in Section 4.

## 2 Problem formulation

This section of the paper provides the proposed formulation with the underlying assumptions.

### 2.1 Objective function

Objective function of the proposed algorithm includes operational costs, load shedding costs, wind curtailment cost and the annualised investment costs of power to hydrogen (P2H) plants. The costs defined as the total costs should be minimised

$$OF = C_f + C_e + C_{lsh} + C_{wc} + C_{P2H} \quad (1)$$

The different costs in (1) are defined as follows:

$$C_f = \sum_{g,t} \tau_t C_{g,t} \quad (2)$$

$$C_e = \sum_{g,t} \tau_t \lambda_e P_{g,t}^G \quad (3)$$

$$C_{lsh} = \sum_{b,t} \tau_t \lambda_D P_{b,t}^{SH} \quad (4)$$

$$C_{wc} = \sum_{b,t} \tau_t \lambda_W P_{b,t}^C \quad (5)$$

$$C_{P2H} = \xi \times \Xi \quad (6)$$

where  $C_{g,t}$  is the fuel cost function (€/h), which is modelled by a quadratic function as follows:

$$C_{g,t} = a_g (P_{g,t}^G)^2 + b_g P_{g,t}^G + c_g \quad (7)$$

The non-linear fuel cost function in (7) will be replaced by set of equations as described in (8a)–(8j) [28]:

$$C_f = \sum_{g,t} C_{g,t} \quad (8a)$$

$$C_{g,t} = a_g (P_{g,t}^{\min})^2 + b_g P_{g,t}^{\min} + c_g + \sum_k s_g^k P_{g,t}^k \quad (8b)$$

$$s_g^k = \frac{C_{g,\text{fin}}^k - C_{g,\text{ini}}^k}{\Delta P_g^k} \quad (8c)$$

$$C_{g,\text{ini}}^k = a_g (P_{g,\text{ini}}^k)^2 + b_g P_{g,\text{ini}}^k + c_g \quad (8d)$$

$$C_{g,\text{fin}}^k = a_g (P_{g,\text{fin}}^k)^2 + b_g P_{g,\text{fin}}^k + c_g \quad (8e)$$

$$0 \leq P_{g,t}^k \leq \Delta P_g^k, \forall k \in \Omega_k \quad (8f)$$

$$\Delta P_g^k = \frac{P_g^{\max} - P_g^{\min}}{|\Omega_k|} \quad (8g)$$

$$P_{g,\text{ini}}^k = (k-1)\Delta P_g^k + P_g^{\min} \quad (8h)$$

$$P_{g,\text{fin}}^k = \Delta P_g^k + P_{g,\text{ini}}^k \quad (8i)$$

$$P_{g,t}^G = P_g^{\min} + \sum_k P_{g,t}^k \quad (8j)$$

The proposed linear formulation of the operating cost makes the problem scalable and suitable for realistic large power systems.

### 2.2 Constraints

The DC power flow equations and constraints of the system are as follows ( $\forall t \in \Omega_T, \forall b, i \in \Omega_B$ ):

The nodal electric power balance for each time period is described as

$$\sum_{g=1}^{\Omega_{G_b}} P_{g,t}^G + P_{b,t}^W - P_{b,t}^L + P_{b,t}^{SH} - Pch_t \times \zeta_b = \sum_{i=1}^{\Omega_B} P_{bi,t}^\ell \quad (9)$$

The power flow between each pair of connected buses (i.e.  $b-i$ ) is calculated as

$$P_{bi,t}^\ell = B_{bi}(\delta_{b,t} - \delta_{i,t}) \quad (10)$$

The satisfaction of ramp rate limits of the thermal units are ensured via the following constraints:

$$P_{g,t}^G - P_{g,t-1}^G \leq RU_g \quad (11)$$

$$P_{g,t-1}^G - P_{g,t}^G \leq RD_g \quad (12)$$

The hourly state of charge for hydrogen storage is dependant on the hourly charge/discharge as well as the efficiency factors

$$SOC_t = SOC_{t-1} + (Pch_t - Pdch_t)\tau_t \quad (13)$$

The amount of hydrogen discharge depends on the capacity of the P2H plant ( $\xi$ )

$$Pdch_t \leq \xi \quad (14)$$

The total daily discharged hydrogen should be greater than the daily hydrogen demand for transportation ( $D_{H_2}$ )

$$\sum_{t \in \Omega_D} Pdch_t \geq D_{H_2} \quad (15)$$

where the following operating limits should be considered  $\forall t \in \Omega_T$ . The power output of thermal generating units should be kept within min and max values

$$P_g^{\min} \leq P_{g,t}^G \leq P_g^{\max} \quad \forall g \in \Omega_G \quad (16)$$

The voltage angles of each bus should be kept within min and max values

$$\delta_b^{\min} \leq \delta_{b,t} \leq \delta_b^{\max} \quad \forall b \in \Omega_B \quad (17)$$

The power flow on each transmission line should be less than the thermal limit of that line

$$-\tilde{P}_{bi}^\ell \leq P_{bi,t}^\ell \leq \tilde{P}_{bi}^\ell \quad \forall \ell \in \Omega_L \quad (18)$$

The power output of wind turbines ( $P_{b,t}^W$ ) is dependent on the wind availability of the region. The curtailed wind power is also limited to the wind availability and installed wind capacity

$$0 \leq P_{b,t}^W \leq w_t \Lambda_b^W \quad \forall b \in \Omega_B \quad (19)$$

$$0 \leq P_{b,t}^C \leq w_t \Lambda_b^W - P_{b,t}^W \quad \forall b \in \Omega_B \quad (20)$$

The variations of hourly electric demand (without the hydrogen demand) are assumed to be known as the input data

$$P_{b,t}^L = d_t \bar{P}_b^L \quad \forall b \in \Omega_B \quad (21)$$

The SNSP limit is enforced as follows:

$$\frac{\sum_b P_{b,t}^W + P_t^{\text{import}}}{\sum_b P_{b,t}^L + Pch_t + P_t^{\text{export}}} \leq \text{SNSP} \quad (22)$$


Considering the SNSP limit ensures the stability of the power system specially in the case of high wind power penetration.

### 2.3 Decision variables and input parameters

The decision variables are listed here

$$DV = \left\{ \xi, Pch_t, Pdch_t, SOC_t, P_{g,t}^G, P_{b,t}^{SH}, P_{b,t}^W, P_{b,t}^C, P_{bi,t}^L, \delta_{b,t} \right\} \quad (23)$$

The input data for this problem are listed here

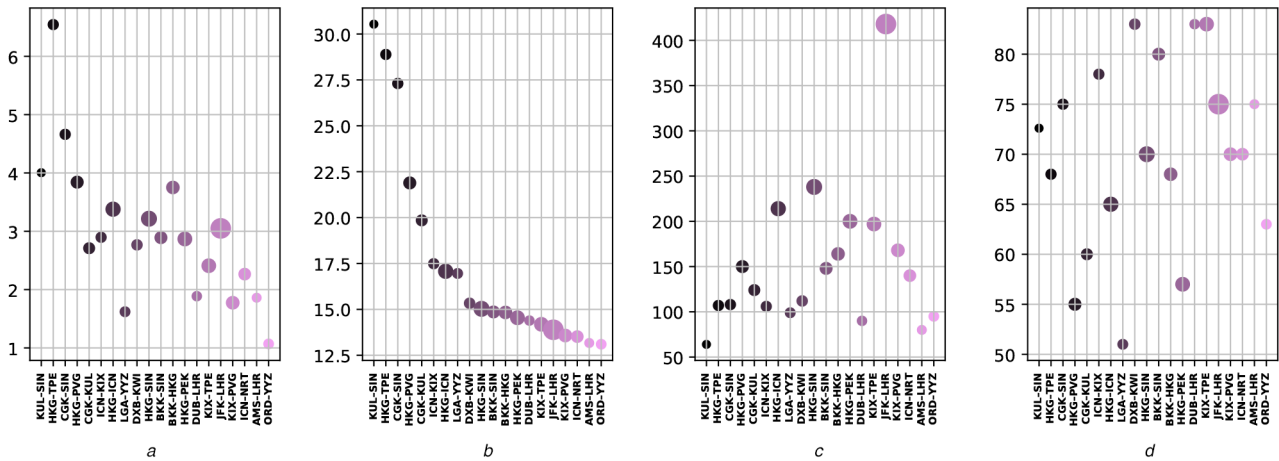

**Fig. 2** Statistical data for top 20 busiest international air routes in the world  
(a) Number of passengers, (b) Number of flights, (c) Flight duration, (d) On-time performance

**Table 2** Top 20 busiest international air routes in the world

No.	Route	Passengers million	Distance, km	Flights	CO <sub>2</sub> /pax/leg, kg	Time , min	Avg S/AC	Fuel /journey, kg	OTP, %
1	KUL-SIN	4.00	296	30,537	41.2	64	177	2766.3	72.6
2	HKG-TPE	6.54	805	28,887	81	107	282	8799.7	68
3	CGK-SIN	4.66	880	27,304	80.1	108	207	6328.1	75
4	HKG-PVG	3.84	1255	21,888	113.5	150	226	9551.1	55
5	CGK-KUL	2.71	1127	19,849	98.7	124	180	6197.1	60
6	ICN-KIX	2.9	859	17,488	79.2	106	219	5905.6	78
7	HKG-ICN	3.38	2070	17,075	154.1	214	254	14,653.4	65
8	LGA-YYZ	1.62	571	16,956	92.8	99	110	3108.6	51
9	DXB-KWI	2.77	851	15,332	92	112	237	7283.5	83
10	HKG-SIN	3.22	2562	15,029	172	238	272	23,460.5	70
11	BKK-SIN	2.89	1416	14,859	104.8	148	247	11461	80
12	BKK-HKG	3.75	1687	14,832	127.7	164	318	15,074.8	68
13	HKG-PEK	2.87	1989	14,543	156.9	200	247	16225	57
14	DUB-LHR	1.89	449	14,390	62.5	90	165	2995	83
15	KIX-TPE	2.41	1703	14,186	138	197	225	12,123.8	83
16	JFK-LHR	3.05	5536	13,888	335.5	418	264	54,216.9	75
17	KIX-PVG	1.77	1305	13,576	114.5	168	174	8352.1	70
18	ICN-NRT	2.27	1255	13,517	100.7	140	211	8834	70
19	AMS-LHR	1.86	365	13,170	59.5	80	158	2620.2	75
20	ORD-YYZ	1.07	700	13,100	115.6	95	95	2977.2	63


$$\text{Data} = \left\{ [a, b, c], \lambda_e, \lambda_D, \lambda_W, \tau_t, B_{bi}, RU_g, RD_g, P_g^{\text{min}}, P_g^{\text{max}}, d_t, w_t, \Lambda_b^W, \bar{P}_b^L, D_{H_2} \right\} \quad (24)$$

## 3 Simulation results

The proposed formulation is coded in GAMS [28] and the simulation results are discussed in this section.

### 3.1 Aircraft data

As a case study, the Dublin-London Heathrow route has been selected to analyse in this paper. The idea is to discuss the pros and cons of replacing aircraft flying in this route with liquid hydrogen powered ones. The statistical data for the top 20 busiest international air routes in the world is shown in Fig. 2 and Table 2. Fig. 2 shows the number of carried passengers (a), number of flights per year (b), flight duration (c) and on-time performance (OTP) (d), which refers to the level of success of the service remaining on the published schedule for each route. Table 2 also lists the routes in the first column (IATA codes of airports are used [29]) followed by number of carried passengers, air distance of each route, number of flights per year, the amount of produced

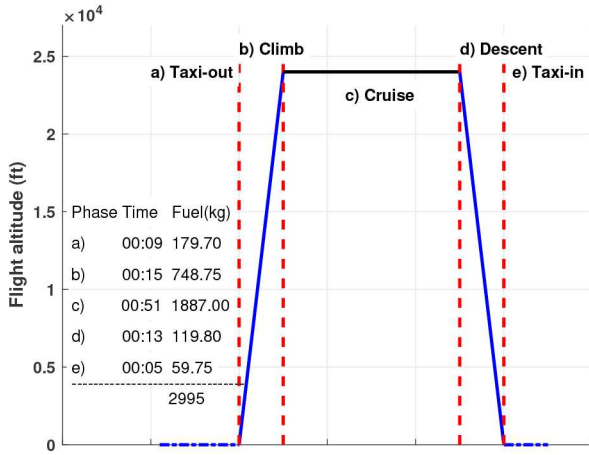

**Fig. 3** Fuel consumption in each flight phase for DUB-LHR route (a) Taxi-out, (b) Climb, (c) Cruise, (d) Descent, (e) Taxi-in

**Table 3** Fuel required for Dublin-London Heathrow flights per day

Aircraft type	$N_f$	FHV, MJ/kg	$\gamma$ , kg	$D_f$ , kg
Jet fuel powered	40	43.1	2995	119,800
hydrogen fuel powered	40	120	1070	42,785

**Table 4** Generation data and connection point

Generator	Cap, MW	$b$	Generator	Cap, MW	$b$
$g_1$	90	1	$g_{17}$	104	27
$g_2$	90	1	$g_{18}$	230	22
$g_3$	431	1	$g_{19}$	230	22
$g_4$	405	22	$g_{20}$	52	16
$g_5$	61	19	$g_{21}$	52	16
$g_6$	118	17	$g_{22}$	81	15
$g_7$	58	17	$g_{23}$	81	15
$g_8$	58	17	$g_{24}$	54	9
$g_9$	431	6	$g_{25}$	54	9
$g_{10}$	342	23	$g_{26}$	241	9
$g_{11}$	408	23	$g_{27}$	241	9
$g_{12}$	17	32	$g_{28}$	52	10
$g_{13}$	91	21	$g_{29}$	52	10
$g_{14}$	285	14	$g_{30}$	400	8
$g_{15}$	285	14	$g_{31}$	137	13
$g_{16}$	285	14	$g_{32}$	444	2

Civil Aviation Organisation (ICAO) [31], the aircraft fuel burn per day could be calculated as follows:

$$D_f = N_f \times \gamma = 40 \times 2995 = 119.800 \text{ ton} \quad (25)$$

$N_f$  is the number of flights per day,  $\gamma$  is aircraft fuel burn/journey, and  $D_f$  is the daily aircraft fuel burn. The total value of fuel burn per day in Dublin-London Heathrow route is 119.8 tonnes. Moreover, A318, A319, A320, A321 have a Passenger  $\text{CO}_2/\text{pax}/\text{leg}$  (kg) of 62.5 [31]. It means that the total amount of generated  $\text{CO}_2$  per day is calculated as follows:

$$\begin{aligned} \text{TCO}_2 &= \text{Passenger CO}_2/\text{pax}/\text{leg} \times N_s \times N_f \\ &= 62.5 \times 165 \times 40 = 412.5 \text{ tons} \end{aligned} \quad (26)$$

$N_s$  is the average seats per aircraft.


Therefore, the Dublin-London Heathrow route is generating 412.5 tonnes of  $\text{CO}_2$  per day. This emission could be cut with liquid hydrogen-powered aircraft subject to a feasible and affordable procedure of producing hydrogen fuel in quantity from a low-carbon sources. The heating value of liquid hydrogen is 2.8 times higher than jet fuel. Therefore, the daily need of the liquid hydrogen for the route is  $119,800/2.8 = 42.785$  tonnes. Table 3 compares the required fuel for jet fuel powered aircraft with those of hydrogen fuel powered aircraft for the selected route per day.

The Clean Energy Partnership (CEP) states that producing hydrogen by electrolysis requires about 55 kWh/kg  $\text{H}_2$  of electricity at an assumed rate of efficiency of higher than 60% [32]. The daily required electric energy to produce the required liquid hydrogen for the busiest European route (Dublin-London-Heathrow) is:  $D_{\text{H}_2} = 42785 \times 55 = 2353.1$  MWh. The investment cost ( $\text{€}$ ) for P2H plant is assumed to be  $\text{€}236,000/\text{MW}$  [33].

### 3.2 Transmission network data

The transmission line data of Irish network is taken from [34] as shown in Fig. 4.

The capacity of each conventional generating unit as well as the connection bus is specified in Table 4. The peak values for the demand nodes are provided in Table 5. The peak demand for the whole network is 5400 MW. The SNSP is assumed to be 70%. It is assumed that there are seven wind turbine sites in the network (with total installed capacity of 4200 MW). The installed capacity of each wind farm is given in Table 6. For this study, the realistic demand, wind and import/export variation with time is taken from EirGrid [35] as shown in Fig. 5. The data is for 10 days (240 h).

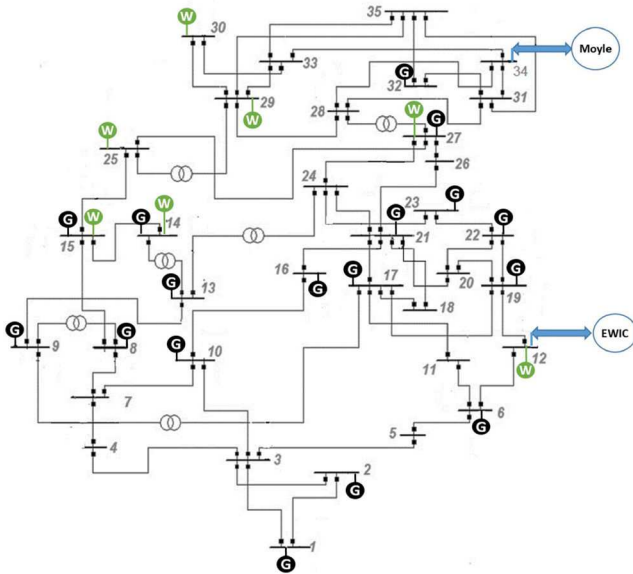

**Fig. 4** Irish representative transmission network


passenger  $\text{CO}_2/\text{pax}/\text{leg}$ , the duration of flight, average number of seats per aircraft, fuel burn per journey, and the OTP as an index for on time running. The data presented in this table is based on routes data in 2018 [30].

Fig. 2 and Table 2, the trip between Dublin (DUB) and London Heathrow (LHR) is the busiest European entry with 14,390 flights per year according to OAG Aviation Worldwide Ltd report [30]. DUB-LHR route is also ranked 14th in the busiest routes of the world table. The average number of flights per day would then be 40. The flights are equipped with A318, A319, A320 and A321 aircraft. Based on the last update of the OAG report, the average seats/aircraft for this route is 165 that could be accommodated in the above-mentioned aircraft [total number of seats is 2,328,652 and 1,887,170 passengers (Fig. 2a) were carried]. In Fig. 2, the size of the circles are proportional with the average flight time in each route. The Dublin-London Heathrow average flight time (hh:mm) is 01:33 (Fig. 2c) and the distance is 449 km. The details of different flight segments in the selected mission are presented in Fig. 3. As it can be seen in this figure, the total fuel burn in the whole mission including taxi out, climb, cruise, descent and taxi in phases is 2995 kg (Fig. 3). Therefore, according to International



**Table 5** Forecasted values for peak demand in each bus, MW


$b$	$\bar{p}_b^L$	$b$	$\bar{p}_b^L$	$b$	$\bar{p}_b^L$
1	175.65	12	144.65	25	242.81
2	7.75	13	15.07	26	224.74
3	224.74	15	269.50	27	219.56
4	61.12	16	188.55	28	292.75
5	220.42	17	51.66	29	103.31
6	28.31	19	348.70	30	256.57
7	110.21	20	346.98	31	222.99
9	74.05	21	229.03	32	172.19
10	190.30	22	567.41	33	124.85
11	87.22	23	60.27	35	138.64

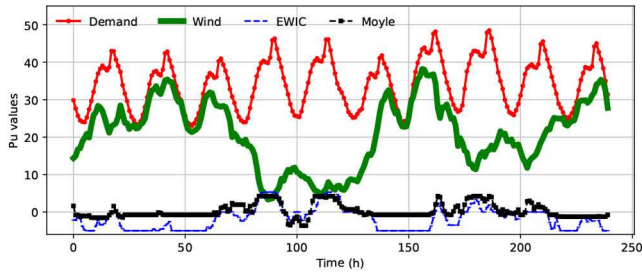

**Fig. 5** Demand, wind and import/export variation with time

**Table 6** Installed capacity of wind turbines in each bus, MW

$w_1$	$w_2$	$w_3$	$w_4$	$w_5$	$w_6$	$w_7$
$b = 12$	$b = 14$	$b = 15$	$b = 25$	$b = 27$	$b = 29$	$b = 30$
611	648	666	537	629	537	574

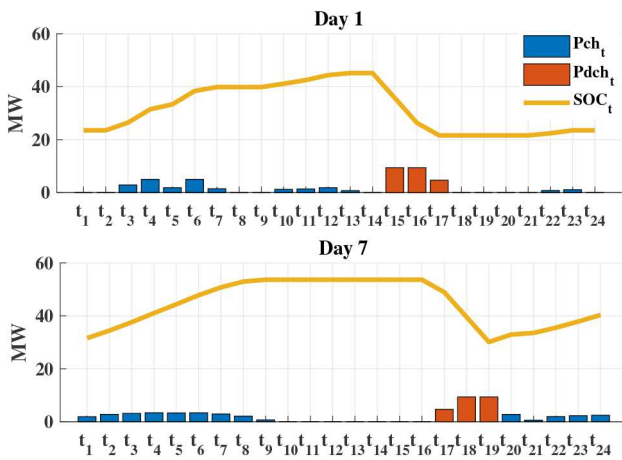

**Fig. 6** P2H hourly schedule for base case for some selected days

### 3.3 No P2H case


In this case, we assume that there is no P2H plant in the system. The daily quantities calculated in this case are:

- Daily costs=€6.910M
- Daily WC=4.1586 GWh.
- Daily CO<sub>2</sub> in power system=14,593.55 tons
- Daily CO<sub>2</sub> in aviation= 412.5 tons


### 3.4 Base case) P2H at Dublin airport

In this case, it is assumed that the P2H plant is installed at bus 22 (Dublin). The problem is solved and the simulation results show that

- Daily Costs= €6.610M

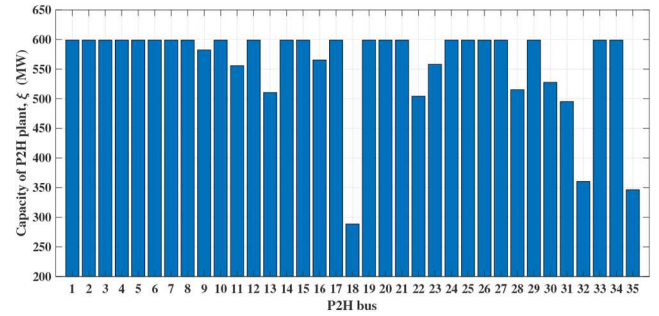

**Fig. 7** Impact of P2H plant location on its optimal capacity

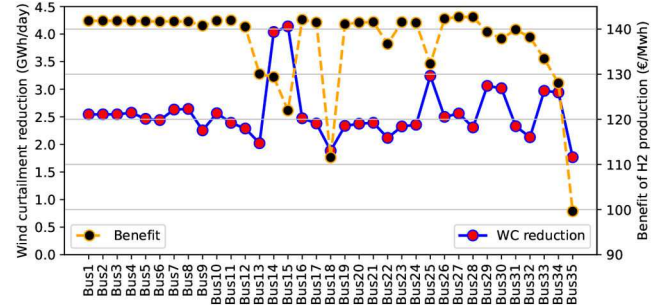

**Fig. 8** Impact of P2H plant location on economic benefits and wind curtailments

- Daily WC= 2.020 GWh
- Daily CO<sub>2</sub> in power system= 14,697.84 tons
- Daily CO<sub>2</sub> in aviation= 0 tones

This means that we can have some saving by reducing the wind curtailment costs as well as 308.21 tons drop in total daily CO<sub>2</sub> pollution. The optimal size of the P2H power plant is  $\xi = 504.255$  MW.

The hourly schedule of P2H for the base case is shown in Fig. 6 for some selected days. The optimal charge and discharge pattern of the hydrogen storage is depicted in this figure. The hourly variation of state of charge (SOC<sub>t</sub>) shows the available amount of hydrogen at each time step. Whenever the hydrogen storage is charged then the magnitude of SOC<sub>t</sub> increases. The shapes of charging/discharging patterns are affected by electric demand, wind generation and network characteristics. For example, if a sufficient amount of wind is available in the network then the charging of hydrogen storage will begin.

### 3.5 Sensitivity analysis

**3.5.1 Connection point:** Assuming that there is only one P2H plant in the system, the connection point of P2H plant to the electricity grid is varied from bus 1 to bus 35. The optimal capacity of the P2H plant is determined in each case. The results are shown in Fig. 7. The minimum value of  $\xi$  is 288 MW at bus 18 and the maximum 600 MW on bus 15.

The price of producing H<sub>2</sub> is highly dependent on the location of the P2H plant as shown in Fig. 8. The benefit of producing H<sub>2</sub> varies from 99.36 to 142.46 €/MWh. It means that producing H<sub>2</sub> is helping the system to avoid other costs (i.e. wind curtailment subsidies and environmental penalties). However, it should be noted that these numbers will not necessarily remain constant if the total daily required H<sub>2</sub> changes. It is worth considering that even the worst-case scenario in Fig. 8 (bus 35) would be much more beneficial compared to conventional jet fuel. The price of jet fuel,  $P_f$ , is around €0.5/kg [36]. Moreover, the carbon offsetting cost,  $P_{cos}$ , in different schemes would vary between €0.2/kg and €0.36/kg [37, 38]. Therefore, based on Table 3, the minimum and maximum equivalent jet fuel cost,  $P_{ef}$ , would be 25.45 €/MWh (no carbon offsetting cost) and 43.86 €/MWh (maximum carbon offsetting cost), respectively, as described in (27). All scenarios in

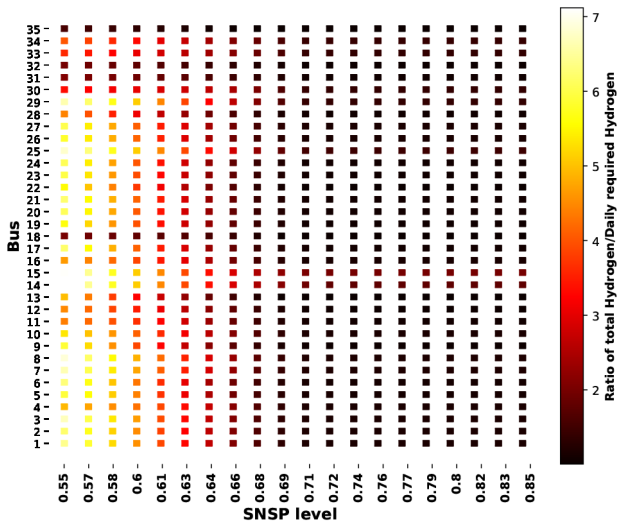


Fig. 9 Impact of SNSP level on capability of generating H<sub>2</sub>

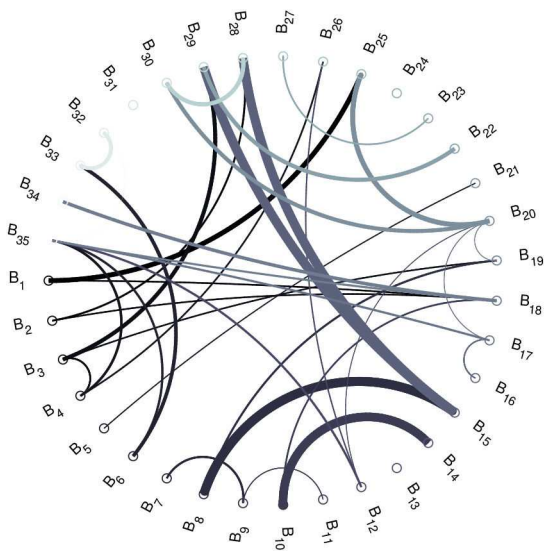


Fig. 10 Impact of pair-buses for connecting the P2H plants in reducing the wind curtailment

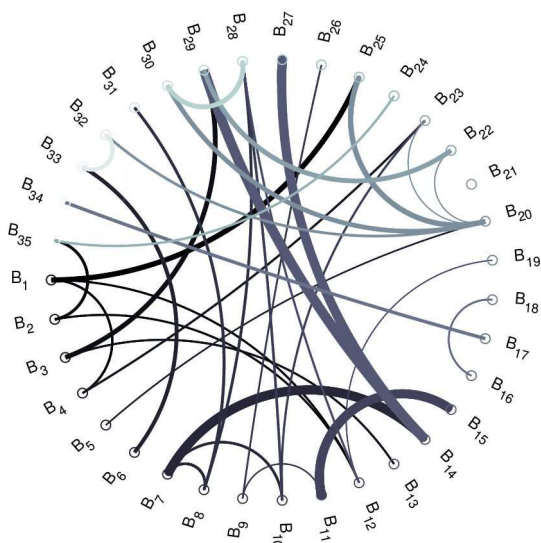


Fig. 11 Impact of pair-buses for connecting the P2H plants in reducing the operating costs

Fig. 8 will produce hydrogen fuel cheaper than jet fuel for the airlines

$$P_{ef} = \frac{D_f(P_f + P_{cos})}{D_{H_2}} \quad (27)$$

$P_{ef}$  is the equivalent jet fuel price per MWh,  $P_f$  is the fuel price, and  $P_{cos}$  is the carbon offsetting cost.

One of the factors that makes the P2H economically viable is the ability to absorb more wind to the electric network (and producing H<sub>2</sub>). However, this capability in reducing the wind curtailment is highly dependent on the connection point of the P2H plant. Fig. 8 shows the wind curtailment reduction (GWh) versus the connection point of the P2H plant. It varies between 1.767 GWh (bus 35) and 4.139 GWh (bus 15).

**3.5.2 SNSP level:** Finally, the impact of the SNSP level (22) is investigated on the total absorbed H<sub>2</sub>. For this purpose, the SNSP level is changed from 0.55 to 0.8. As depicted in Fig. 9, the SNSP level has a direct impact on total producible H<sub>2</sub>. This impact is different if the connection point of the P2H plant is changed in the network. For example, Bus 15 can absorb up to seven times the daily required H<sub>2</sub> (2353.1 MWh) at a low SNSP level (0.55). It is expected to happen since at low SNSP levels, the total wind curtailment increases and it is more economic to convert it to hydrogen. This clearly demonstrates the importance of optimal allocation of P2H plant in the electricity network.

From Fig. 9 it is observed that increasing the SNSP beyond a certain level (here 75%) does not lead to increase in H<sub>2</sub> production or even reducing the operating costs. The technical reason behind this phenomena is that after certain SNSP level, the system cannot absorb more power due to transmission line thermal limits. The min power generation limit of other non-res technologies can be also a reason for it.

**3.5.3 Selecting a pair of buses for P2H connection:** Increasing the number of P2H plants can improve the capability of the system in absorbing wind and therefore reducing the wind curtailment. The analysis shows that the best buses for pairing are  $b_{15} - b_8$  which can reduce the initial average daily wind curtailment by 4.155 GWh. Both of these buses host wind turbines and therefore this combination has the potential to absorb more wind from the grid. The weight of edges in Fig. 10 shows the merit of each pair of buses for reducing the wind curtailment.

It should be noted that if the purpose of having two P2H plants is reducing the operating costs then the ‘best pair’ might be different. Fig. 11 shows the best combination of the buses for reducing the operating costs. The best pair is  $b_{14} - b_7$  which can reduce the daily operating costs (compared to no H<sub>2</sub> case) by € 0.6261M.

### 3.6 Airlines' perspective

The possibility of having hydrogen fuel-powered civil aircraft (100+ passenger planes) is a game-changer for airlines; especially for dealing with the future targets and requirements of air travel systems (e.g. Flight Path 2050 [26]). The majority of a flight mission in civil aircraft is associated with the cruise phase at high altitudes where emissions have two to four times the impact of equivalent emissions at ground level.

Moreover, producing an alternative sustainable fuel in quantity with affordable prices in comparison with jet fuels is a strong motivation for aero-engine designers and manufacturers to invest and explore new designs for the next generation of aircraft engines with respect to the limited supply and increasing price of the current jet fuels. In this aspect, electrification is also being considered as a high potential candidate. There are some successful projects in small battery-powered aircraft development [39–41]. However, the limitation of batteries' weight and low power to weight ratio means that it will be difficult to scale up to larger aircraft.

‘With hydrogen as a fuel, there is no physical reason we can't go larger and longer. Each step in increasing the range and the size of aircraft we can fly needs technological improvements, but it's mostly a question of engineering, not new physics’, Miftakhov,

who previously founded an electric vehicle charging company eMotorWerks, said [42]. Although engine and aircraft manufacturers have to redesign the aircraft and engine, it is not a crucial point as it is what has happened every time a new engine is introduced.

## 4 Conclusion

The main findings of this paper are outlined as follows:

- The connection point of the P2H plant as well as the size of it have significant impacts on the capability of P2H in absorbing electricity. This is mainly because of transmission network physical constraints (power flow and thermal line limits).
- By having P2H plants close to the wind sites, it would be easier to absorb the generated clean wind power and avoid violating the line flow limits.
- The environmental pollution penalty can make the P2H economically viable. The generated hydrogen can be either blended with the natural gas or combusted directly with nearly zero carbon emission.
- Producing the H<sub>2</sub> in high penetrated wind systems can be done at a negative price. The income obtained from selling the hydrogen and offsetting the carbon emission can return the operation and investment costs.
- Converting the excessive wind using the P2G can reduce the dependency rate on energy imports. It is inline with the stability improvement of EU's energy supply.
- The idea of producing green hydrogen could help the airlines in ACARE Flight Path 2050 emission requirements satisfaction as the aircraft greenhouse gases will be reduced dramatically. Using hydrogen ensures affordable transportation for all consumers by reducing the operating costs of airlines in the long run.

Suggestions for future work:

- The impact of H<sub>2</sub> extraction on gas networks should be investigated. A portion of the electricity demand will be supplied via thermal power plants. These generators are supplied by gas networks. The technical and economic set-points of gas networks will be affected [43].
- A more detailed AC-OPF can better characterise the impact of H<sub>2</sub> extraction in power systems.
- The voltage stability of power system in presence of H<sub>2</sub> extraction plants should be investigated [44]. The available transfer capacity of the system will be different in this case.
- The uncertainty of wind power generation should be taken into account to avoid financial and technical risks [45].

## 5 Acknowledgments

The work of Alireza Soroudi has emanated from research supported (in part) by University College Dublin under the UCD grant number OBRSS-62184.

## 6 References

- [1] Mohseni-Bonab, S.M., Rabiee, A.: 'Optimal reactive power dispatch: a review, and a new stochastic voltage stability constrained multi-objective model at the presence of uncertain wind power generation', *IET Gener. Transm. Distrib.*, 2017, **11**, (4), pp. 815–829
- [2] Kheramandi, M., Feuillet, R.: 'Using voltage control for reducing standing phase angle in power system restoration', *Electr. Power Syst. Res.*, 2017, **146**, pp. 9–16
- [3] EirGrid, S.: 'Annual renewable energy constraint and curtailment report 2018', 2019
- [4] Kuwahata, R., Merk, P., Wakeyama, T., *et al.*: 'Renewables integration grid study for the 2030 Japanese power system', *IET Renew. Power Gener.*, 2020, **14**, pp. 1249–1258
- [5] E. Commission: 'National energy and climate plans (necps)'. Available at [https://ec.europa.eu/clima/policies/strategies/2030\\_en](https://ec.europa.eu/clima/policies/strategies/2030_en), 2020
- [6] Soroudi, A., Maghoul, P., Keane, A.: 'Resiliency oriented integration of dhrs in transmission networks', *IET Gener. Transm. Distrib.*, 2017, **11**, (8), pp. 2013–2022
- [7] Morozovska, K.: 'Dynamic rating with applications to renewable energy'. PhD dissertation, KTH Royal Institute of Technology, 2020
- [8] Dorevic, Z., Durisic, A.: 'Mathematical model for the optimal determination of voltage level and pcc for large wind farms connection to transmission network', *IET Renew. Power Gener.*, 2019, **13**, (12), pp. 2240–2250
- [9] Maghoul, P., Mousavimirkolaei, S.A.: 'A transmission expansion planning model for maximizing merchant investment', *J. Electr. Power Energy Convers. Syst.*, 2016, **1**, (1), pp. 8–15
- [10] Yacar, D., Tejada-Arango, D.A., Wogrin, S.: 'Storage allocation and investment optimisation for transmission-constrained networks considering losses and high renewable penetration', *IET Renew. Power Gener.*, 2018, **12**, (16), pp. 1949–1956
- [11] Xie, X., Wang, S., Liu, H., *et al.*: 'Hydrogen production equipment-based supplementary damping control to mitigate subsynchronous oscillation in wind power systems', *IET Renew. Power Gener.*, 2019, **13**, (14), pp. 2715–2722
- [12] Gabrielli, P., Poluzzi, A., Kramer, G.J., *et al.*: 'Seasonal energy storage for zero-emissions multi-energy systems via underground hydrogen storage', *Renew. Sustain. Energy Rev.*, 2020, **121**, p. 109629
- [13] Mei, J., Wang, X., Kirtley, J.L.: 'Optimal scheduling of real multi-carrier energy storage system with hydrogen-based vehicle applications', *IET Renew. Power Gener.*, 2020, **14**, (3), pp. 381–388
- [14] Zhang, Y., Wei, W.: 'Decentralised coordination control strategy of the pv generator, storage battery and hydrogen production unit in islanded ac microgrid', *IET Renew. Power Gener.*, 2020, **14**, (6), pp. 1053–1062
- [15] Garcia-Triviño, P., Torreglosa, J.P., Jurado, F., *et al.*: 'Optimised operation of power sources of a pv/battery/hydrogen-powered hybrid charging station for electric and fuel cell vehicles', *IET Renew. Power Gener.*, 2019, **13**, (16), pp. 3022–3032
- [16] Kere, L.J., Kelouani, S., Agbossou, K., *et al.*: 'Improving efficiency through adaptive internal model control of hydrogen-based genset used as a range extender for electric vehicles', *IEEE Trans. Veh. Technol.*, 2017, **66**, (6), pp. 4716–4726
- [17] Ge, P., Hu, Q., Wu, Q., *et al.*: 'Increasing operational flexibility of integrated energy systems by introducing power to hydrogen', *IET Renew. Power Gener.*, 2020, **14**, (3), pp. 372–380
- [18] Bakhtiari, H., Naghizadeh, R.A.: 'Multi-criteria optimal sizing of hybrid renewable energy systems including wind, photovoltaic, battery, and hydrogen storage with epsilon-constraint method', *IET Renew. Power Gener.*, 2018, **12**, (8), pp. 883–892
- [19] Hu, Q., Lin, J., Zeng, Q., *et al.*: 'Optimal control of a hydrogen microgrid based on an experiment validated P2HH model', *IET Renew. Power Gener.*, 2020, **14**, (3), pp. 364–371
- [20] Brunetto, C., Tina, G.: 'Optimal hydrogen storage sizing for wind power plants in day ahead electricity market', *IET Renew. Power Gener.*, 2007, **1**, (4), pp. 220–226
- [21] Banaei, M., Rafiei, M., Boudjadar, J., *et al.*: 'A comparative analysis of optimal operation scenarios in hybrid emission-free ferry ships', *IEEE Trans. Transp. Electr.*, 2020, **6**, (1), pp. 318–333
- [22] McDonagh, S., Ahmed, S., Desmond, C., *et al.*: 'Hydrogen from offshore wind: investor perspective on the profitability of a hybrid system including for curtailment', *Appl. Energy*, 2020, **265**, p. 114732
- [23] Lee, D.: 'International aviation and the paris agreement temperature goals'. Unspecified. Department for transport, 2018
- [24] Maniaci, D.C.: 'Operational performance prediction of a hydrogen-fueled commercial transport'. 2006 Symp. Paper Archived 2006-09-05 at the Wayback Machine, Reno, Nevada, 2006
- [25] Airbus and Deutschland, in Liquid Hydrogen Fuelled Aircraft - CRYOPLANE Final Technical Report, 2003
- [26] Darecki, M., Edelstenne, C., Enders, T., *et al.*: 'Report of the high level group on aviation research, directorate-general for research and innovation directorate-general for mobility and transport'. Flightpath 2050, Europe's Vision for Aviation Maintaining Global Leadership & Serving Society's Needs, 2011
- [27] Jafari, S., Nikolaidis, T.: 'Thermal management systems for civil aircraft engines: review, challenges and exploring the future', *Appl. Sci.*, 2018, **8**, (11), p. 2044
- [28] Soroudi, A.: 'Power system optimization modeling in GAMS' (Springer International Publishing, Netherland, 2017)
- [29] 'Iata codes for airports'. Available at <https://www.world-airport-codes.com/>, 2019
- [30] OAG and A. report, in Key facts behind the world's 20 busiest routes, 2018
- [31] 'International civil aviation organization icao carbon emissions calculator methodology', Version 10, June 2017
- [32] CEP: 'Clean energy partnership'. Available at <http://cleanenergypartnership.de>, 2020
- [33] Nrel: 'Manufacturing cost analysis for proton exchange membrane water electrolyzers'. Available at <https://www.nrel.gov/docs/fy19osti/72740.pdf>, 2019
- [34] Burke, D.J., O'Malley, M.J.: 'A study of optimal nonfirm wind capacity connection to congested transmission systems', *IEEE Transactions on Sustainable Energy*, 2011, **2**, (2), pp. 167–176
- [35] EirGrid: 'Smart grid dashboard'. Available at <http://smartgriddashboard.eirgrid.com/>, 2020
- [36] IATA: 'Monitor, IATA jet fuel price'. Available at <https://tinyurl.com/y75j3zft>, 2017
- [37] Ontheluce: 'The traveller's guide to carbon offsetting your flights'. Available at <https://www.ontheluce.com/carbon-offsetting-flights/>, Last updated on 9 January 2020
- [38] Myclimate: 'Offset your flight emissions'. Available at [https://co2.myclimate.org/en/flight\\_calculators/new](https://co2.myclimate.org/en/flight_calculators/new), 2020
- [39] Hoggins, T.: 'The 'world's first' electric plane that can travel 650 miles on battery power alone'. Available at <https://www.telegraph.co.uk/technology/>



- 2019/06/21/worlds-first-electric-plane-can-travel-650-miles-battery-power/, 21 June 2019
- [40] Irfan, U.: 'Forget cars. we need electric airplanes'. <https://www.vox.com/2019/3/1/18241489/electric-batteries-aircraft-climate-change>, 9 April 2019
- [41] IATA: 'The engineering marvels making planes greener'. Available at <https://tinyurl.com/vf5gteg>, 2020
- [42] Scott, M.: 'Is hydrogen the fuel of the future for climate-friendly flying?'. Available at <https://tinyurl.com/wn4fbho>, 2020
- [43] Sohrabi, F., Jabari, F., Mohammadi-Ivatloo, B., *et al.*: 'Coordination of interdependent natural gas and electricity systems based on information gap decision theory', *IET Gener. Transm. Distrib.*, 2019, **13**, (15), pp. 3362–3369
- [44] Rabiee, A., Nikkhal, S., Soroudi, A.: 'Information gap decision theory to deal with long-term wind energy planning considering voltage stability', *Energy*, 2018, **147**, pp. 451–463
- [45] Hemmati, M., Mohammadi-Ivatloo, B., Soroudi, A.: 'Chapter 2 - uncertainty management in decision-making in power system operation', in Aleem, S.H.A., Abdelaziz, A.Y., Bansal, R., Zobaa, A.F. (Eds.): '*Decision making applications in modern power systems*' (Academic Press, Netherland, 2020), pp. 41–62

2021-02-16

# Power to air transportation via hydrogen

Soroudi, Alireza

Wiley

---

Soroudi A, Jafari S. (2021) Power to air transportation via hydrogen. IET Renewable Power Generation, Volume 14, Issue 17, December 2020, pp. 3384-3392

<https://doi.org/10.1049/iet-rpg.2020.0414>

*Downloaded from Cranfield Library Services E-Repository*