

Journal Pre-proof

ESA F-Class Comet Interceptor: Trajectory design to intercept a yet-to-be-discovered comet

Joan Pau Sánchez, David Morante, Pablo Hermosin, Daniel Ranuschio, Alvaro Estalella, Dayana Viera, Simone Centuori, Geraint Jones, Colin Snodgrass, Anny Chantal Levasseur-Regourd, Cecilia Tubiana

PII: S0094-5765(21)00372-6

DOI: <https://doi.org/10.1016/j.actaastro.2021.07.014>

Reference: AA 8758

To appear in: *Acta Astronautica*

Received Date: 8 March 2021


Revised Date: 11 June 2021

Accepted Date: 11 July 2021

Please cite this article as: J.P. Sánchez, D. Morante, P. Hermosin, D. Ranuschio, A. Estalella, D. Viera, S. Centuori, G. Jones, C. Snodgrass, A.C. Levasseur-Regourd, C. Tubiana, ESA F-Class Comet Interceptor: Trajectory design to intercept a yet-to-be-discovered comet, *Acta Astronautica* (2021), doi: <https://doi.org/10.1016/j.actaastro.2021.07.014>.

This is a PDF file of an article that has undergone enhancements after acceptance, such as the addition of a cover page and metadata, and formatting for readability, but it is not yet the definitive version of record. This version will undergo additional copyediting, typesetting and review before it is published in its final form, but we are providing this version to give early visibility of the article. Please note that, during the production process, errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

© 2021 Published by Elsevier Ltd on behalf of IAA.



ESA F-Class Comet Interceptor: Trajectory Design to Intercept a Yet-to-be-discovered Comet.

Joan Pau Sánchez^a, David Morante^b, Pablo Hermosin^b, Daniel Ranuschio^a, Alvaro Estalella^a, Dayana Viera^a, Simone Centuori^b, Geraint Jones^{c,d}, Colin Snodgrass^e, Anny Chantal Levasseur-Regourd^f, Cecilia Tubiana^g

^a*School of Aerospace, Transport and Manufacturing, Cranfield University, Cranfield, UK*

^b*Deimos Space S.L.U, Ronda de Poniente 19, Edificio Fiteni VI, Tres Cantos, Madrid, Spain*

^c*Mullard Space Science Laboratory, University College London, UK*

^d*Sentre for Planetary Sciences, UCL/Birkbeck, UK*

^e*School of Physics & Astronomy, University of Edinburgh, UK*

^f*LATMOS/CNRS, Sorbonne Université, Paris, France*

^g*Istituto di Astrofisica e Planetologia Spaziali – IAPS/INAF Roma, Italy*

Abstract

Comet Interceptor (Comet-I) was selected in June 2019 as the first ESA F-Class mission. In 2029⁺, Comet-I will hitch a ride to a Sun-Earth L2 quasi-halo orbit, as a co-passenger of ESA's M4 ARIEL mission. It will then remain idle at the L2 point until the right departure conditions are met to intercept a yet-to-be-discovered long period comet (or interstellar body). The fact that Comet-I target is thus unidentified becomes a key aspect of the trajectory and mission design. The paper first analyses the long period comet population and concludes that 2 to 3 feasible targets a year should be expected. Yet, Comet-I will only be able to access some of these, depending mostly on the angular distance between the Earth and the closest nodal point to the Earth's orbit radius. A preliminary analysis of the transfer trajectories has been performed to assess the trade-off between the accessible region and the transfer time for a given spacecraft design, including a fully chemical, a fully electric and a hybrid propulsion system. The different Earth escape options also play a paramount role to enhance Comet-I capability to reach possible long period comet targets. Particularly, Earth-leading intercept configurations have the potential to benefit the most from lunar swing-by departures. Finally, a preliminary Monte Carlo analysis shows that Comet-I has a 95 to 99% likelihood of successfully visit a pristine newly-discovered long period comet in less than 6 years of mission timespan.

Keywords: Comet-I, Trajectory Design, Hybrid Propulsion Trajectories, Third body effects, Lunar Swing-by

1. Introduction

While the scientific return of past comet missions is unquestioned, all previously visited comets had approached the Sun on many occasions and, consequently, have also undergone substantial compositional and morphological modifications. Comet Interceptor mission proposes instead to intercept and explore an undiscovered Long Period Comet (LPC),

which ideally would be visiting the inner Solar System for the first time [1].

The European Space Agency (ESA) selected in 2019 the Comet Interceptor (Comet-I) as its first Fast-track class mission (F-class). This newly created F-Class mission category enables mission opportunities that exploit joint launch opportunities with other ESA missions, and emphasises implementation of novel space concepts. Comet-I will be launched in 2029 as a co-passenger with ESA's M4 ARIEL Mission on board an Ariane 6.2. It will be deployed in a Sun-Earth L2 (SE L2) quasi-halo orbit and remain there by means of small orbit maintenance manoeuvres for a period of up to 3 years; while it awaits for the right departure conditions to intercept a yet-to-be-discovered long period comet.

After selection, Comet-I successfully completed the internal ESA studies of the Assessment Phase (phase 0) [2]. In February 2020, ESA approved advancement of Comet-I into the Definition Phase (Phase A). The current baseline involves three spacecraft elements working together to ensure a bountiful scientific return through unprecedented multipoint measurements. A main spacecraft (S/C A) would make remote observations of the target from afar, to protect it from the dust environment and act as the primary communications hub for all other mission elements. Two smaller daughtercraft (JAXA's S/C B1 and ESA's S/C B2) would venture much closer to the target, carrying instruments to complement and enhance the scientific return.

A key aspect of Comet-I is the need to be designed without an identified target, or rather Comet-I must be designed to intercept a yet-to-be-discovered comet. Hence, a sufficiently large number of comet intersection trajectories must be optimized and studied, in order to inform the spacecraft design with statistical underpinning. Moreover, the trajectory analysis must also bring evidences that Comet-I is not subject to the seemingly chanceful event of an adequate LPC being discovered, but that, on the contrary, the risk for Comet-I not having an adequate fly-by opportunity is indeed very low.

The present paper synthesises the work carried out at Cranfield University and DEIMOS Space to understand and inform the feasibility of Comet-I mission design. The paper presents the highlights of three parallel 5 to 6 months MSc internship projects carried out during the second and third quarters of 2020 [3-5].

The remainder of the paper is divided as follows. Section 2 describes the main set of scientific and mission requirements and constraints that define the extend, or range, of possible intercept trajectories. Section 3 presents the target celestial objects of choice, i.e. Long Period Comets ideally arriving to the inner Solar System for their first time, and their main orbital characteristics. Section 4 provides a complete overview of Comet-I intercept trajectory and discusses the convenience of describing the entire trajectory in two parts; one covering the Earth escape and a second covering the heliocentric phase. Section 5 focuses on the analysis of the heliocentric phase and presents a preliminary analysis of the transfer trajectories, together with maps of accessibility, in the ecliptic plane, for chemical, electrical and hybrid propulsion systems. Section 6 investigates possible Earth escape departure options from Comet-I's quasi-halo parking orbit, including opportunities to benefit from a lunar swing-by to maximise the escape velocity. In Section 7, a Monte Carlo analysis is presented to study the risks entailed with launching a mission without a defined target object. Section 8 concludes the paper with a brief summary.

2. Trajectory Design Requirements

This first section examines the main set of requirements and constraints that must be satisfied by Comet-I's intercept trajectory. These are derived from two main sources: On the one hand, the science objectives of the mission, which obviously require Comet-I to reach a pristine newly-discovered comet. On the other hand, the boundary conditions set for the F-Class Mission, which in fact define some of the most constraining limitations on the trajectory design, such as the feasible Δv budget.

2.1. Scientific Requirements

Comet-I's primary goal is to provide the first-ever characterization of a pristine newly-discovered long period comet (LPC) [6]. The comet characterisation must include morphological analysis, surface composition, structure, composition of the coma, etc. The mission must also provide a multi-point measurement of the comet-solar wind interaction. Hence, given the necessary measurements, it follows that the mission must go far beyond what a typical Earth-based point source observation could achieve, and must indeed intercept with the targeted comet at a close range. Comet-I should encounter the comet within a distance of a few hundreds to a few thousands of kilometres, in order to allow for sufficient spatial resolution of the remote sensing payload [6].

Comet-I seeks to provide new understandings of the working of our Solar System, the processes of planetary formation and the emergence of life. To achieve this, it will visit a comet which has the Oort cloud as its point of origin. The Oort cloud is located at the very edge of our Solar System and provides a reservoir of the most pristine leftovers of the formation of planets. Ideally, the target comet will be visiting the inner solar system for the first time (generally referred as dynamically new comet). Finally, while unlikely and given their exceptional scientific value, there is a non-negligible probability that a serendipitous interstellar object, such as 1I/'Oumuamua [7] or 2I/Borisov [8], may be discovered and targeted by Comet-I [9].

Thus, feasible target comets will have orbital periods of tens of thousands of years (or hyperbolic trajectories), which implies that they will need to be first discovered by Earth-based astronomical surveys while in an inbound trajectory, and intercepted before it leaves the inner solar system. It follows then that the targeted comet is today undetected (i.e., still to be discovered) and its current position must be somewhere just past the orbit of Neptune (i.e., such that it reaches a periaapsis after the 2029⁺ launch window).

Hence, the future target for Comet-I must be discovered sufficiently deep into the outer Solar System to allow sufficient warning time for a successful transfer to the intercept point. Until relatively recently these comets were discovered within Jupiter's orbit [10]. However, recent advances allowing deeper and more coherent surveys are lengthening the distance at which these objects are discovered. Moreover, the Vera C. Rubin Observatory's Legacy Survey of Space and Time (LSST) is scheduled to be online from the mid-2020s and will conduct the most sensitive Solar System survey ever performed [11].

2.2. F-Class Boundary Conditions

Comet-I is the first ESA Fast Track mission (F-Class). As quoted in the original Announcement of Opportunity¹ (AoO), ESA's cost at Completion (CaC) must be less than 150 M€. However, this CaC does not include launch cost, since Comet-I will be launched

towards the Sun-Earth Lagrange L2 point in a dual launch with ARIEL M4 mission. ARIEL is currently scheduled for launch in 2029 and, as such, Comet Interceptor must be launch ready by 2028 [12]. Hence, Comet-I must fit within the leftover launch performance of ARIEL's Ariane 6.2, which severely limits the available wet mass for Comet-I. At the time of the original AoO, the available wet mass was quoted as of 1,000 kg. However, after several design iterations, the latest requirement states that Comet-I should have no more 750 kg of wet mass, excluding launch adapter [13]. Given the CaC and the available wet mass, is clear that Comet-I should be a small mission/spacecraft and have a limited mission duration. In fact, the mission duration is expected to be of at most 6 years, including the transmission of all science data back to Earth.

¹<https://www.cosmos.esa.int/web/call-for-fast-mission-2018>

2.3. Trajectory Design Envelope

The fact that Comet-I's target has neither been selected, nor discovered, means that the Δv cost to reach the target cannot be possibly known. More importantly, the available Δv budget will define the spacecraft's region of accessibility, which is to say the orbital space within which intercept trajectories are feasible. Hence, given the epistemic uncertainties on the orbit of the yet-to-be-discovered target, the allocation of Δv budget has a direct relation with the probability of finding a feasible target for Comet-I. Here finding does not only refer to the event of a pristine long period comet being newly surveyed, but also to the probability of this comet having an interception point within reach of Comet-I spacecraft.

Following on Sec. 2.1 and with the purpose of providing a preliminary envelope for what can be considered feasible design options, this paper will assume a $\Delta v \sim 1$ km/s to be roughly feasible for the propulsive capabilities of Comet-I. It should be noted that Phase 0 mission requirements for ESA's Invitation to Tender quote a capability of 750 m/s as a requirement for the intercept trajectory [13]. This is along the lines of the original Comet-I submission to the AoO, which also considers the trade-off between chemical and low-thrust propulsion system, and identified this as a key aspect to iterate during phase 0/A [14]. Indeed, this trade-off was preliminarily studied during Comet-I Phase 0, concluding that, while 1.5 km/s may be a feasible capability for an electric propulsion system, the chemical propulsion configuration seems to cope better with the strict programmatic requirements of the F-Class mission [2]. Nevertheless, this will be subject to further iterations during Phase A/B1. Table 1 summarises Section 2 discussion on the trajectory requirements and constraints.

Table 1. Comet Intercept Trajectory Requirements and Constraints.

#	<i>Trajectory Requirement and Constraints</i>
1.	Comet-I must fly-by a pristine LPC within a few thousand kilometres from its nucleus.
2.	LPC must be discovered sufficiently deep into the outer Solar System to allow the necessary time of flight to reach the intercept point.
3.	Launch date in 2029 ⁺ .
5.	Mission Duration less than 6 years.
6.	Δv budget of about 1 km/s.

3. The Population of Long Period Comets

As mentioned above, the goal of Comet-I is to understand the evolution of the Solar System by visiting one of its pristine building blocks, preserved during billions of years within the distant Oort cloud. These pristine building blocks are eventually nudged out of the Oort cloud, likely by the Galactic tide and nearby stars, and return to the inner Solar System as long period comets (LPC).

An LPC is generally defined as an object with orbital period larger than 200 years. If the object has reached the planetary region (i.e., $q < 10$ au), means it will have a minimum eccentricity of about 0.7. However, as shown in Figure 1, there is a very strong bias towards eccentricities very nearly 1 (i.e., > 0.99), as would be expected for objects with aphelion within the Oort cloud.

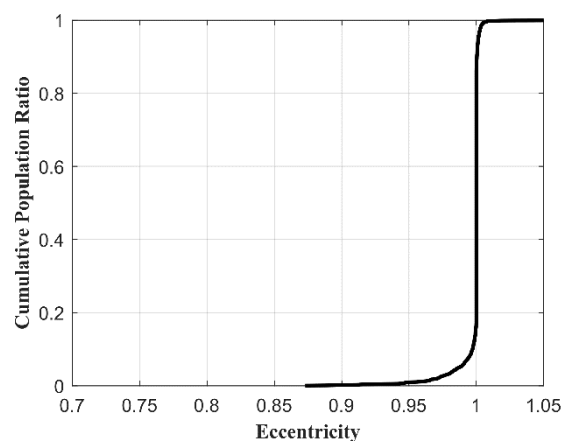


Figure 1. Cumulative Probability Distribution of the eccentricity of the known population of LPCs. The eccentricity of 2668 LPCs was retrieved from JPL Small-Body Database Search Engine. Search includes all $P > 200$ years, hyperbolic and parabolic comets with $q < 10$ au.

Figure 2 instead shows the probability density function of the periapsis distance for the same known population of LPCs (for the $[0, 2]$ au range). It can be seen that the known population have a clear bias at 0 au, however this bias is an observational artifact favouring the detection of sungrazing comets [15]. Thus, a better data set is the synthetic LPC population created by Boe et al [16] to simulate survey detection efficiency. The population was generated based on the best current knowledge of Oort cloud comet orbital distribution [17], and was shown to be a good match for the de-biased discovered population of the currently most sensitive survey, i.e. Pan-STARRS [16]. Boe et al [16] kindly provided the set of 1700 objects with $q < 2$ au.

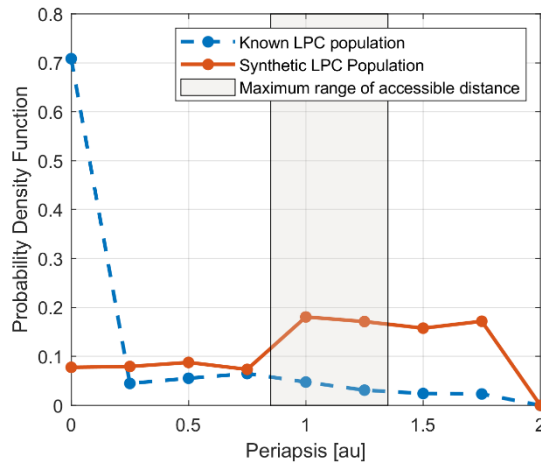


Figure 2. Probability density function of LPC periapsis distance for the 0 to 2 au range for the known LPC population and a debiased synthetic LPC population by Boe et al. [16]. The range [0.85, 1.35] has been highlighted as potentially reachable by Comet-I spacecraft (arguably an optimistic case).

While detailed discussion of Comet-I trajectory design will follow, it should now be noted that Comet-I limited Δv budget will not allow to access to the whole heliocentric distance range, as plotted in Figure 2. However, the shadowed area is here assumed to be potentially accessible, at least if particular departure conditions benefiting from lunar swing-bys are achieved, as demonstrated by ISEE-3/ICE [18]. Within this range, and given the statistical significance of the plotted sample, it can be assumed that the probability density is relatively homogenous.

On the other hand, and given the cost of out-of-the-ecliptic transfers, it can also be assumed that Comet-I will most likely intersect the targeted LPC near the ecliptic. Figure 3 shows all the nodal points (i.e., ascending and descending nodes) of the known LPCs and Boe et al. synthetic population. As observed in the figure, the density of intersection points within the accessible region is approximately homogeneous as well. Finally, it should be noted that the decade 2010-2019 saw a total of 30 new LPCs with nodal points within the accessible range [0.85,1.35] au. This is an equivalent frequency of 3 LPCs a year, without consideration of the size of the comet.

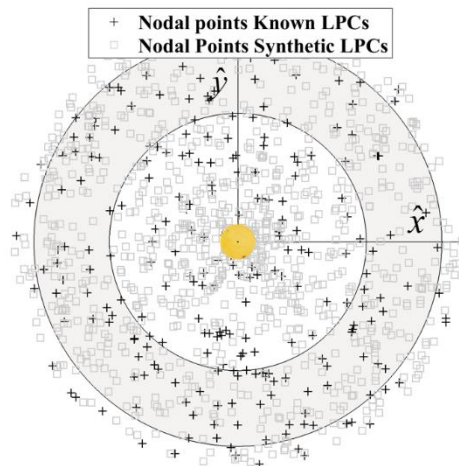


Figure 3. Nodal point distribution in the ecliptic plane for all known LPCs and Boe et al. synthetic population [16].

The actual size of the discovered comet will relate with its nuclear absolute magnitude, which, together with its coma activity, will define the heliocentric distance at which the comet will be discovered. The comet should be discovered just about the orbit of Jupiter in order for Comet-I to have about 400 days of warning time. A warning time of 800 days would be equivalent to a discovery at 8.6 au distance and 1000 days of warning time would be equivalent to 10 au, approximately.

It is worth noting that state-of-the-art survey capabilities are currently detecting LPCs considerably beyond the orbit of Jupiter (see figure 5 from Królikowska and Dybczyński [10]). However, a key capability that may arguably enable Comet-I mission is the Vera C. Rubin Observatory's Legacy Survey of Space and Time (LSST), which is scheduled to be operational in 2023¹. The LSST survey will scan the night sky at a visual limiting magnitude three points deeper than any previous survey. The survey simulation environment developed for LSST [19, 20] was used to simulate the detection efficiency of the synthetic LPCs generated by Boe et al. [16]. This simulation confirms that most of the LPCs discoveries are expected to have more than 3 years of warning time. In particular, 90% of the LPCs should be spotted beyond the orbit of Jupiter, 80% should allow for more than 2 years of warning time and about 75% should allow for more than 3 years of warning time [14].

Hence, overall, once the LSST is fully operational, 2 LPC per year should be expected to have intersection opportunities within the accessible region of the ecliptic plane (see grey area in Figure 3) and allow for at least 3 years warning time. While one more LPC may be spotted and only accessible with less than 3 years transfer time.

4. Overview of Comet-I intercept trajectory.

Figure 4 represents an example of intercept trajectory, which departs the Earth with an excess escape velocity v_∞ of about 800 m/s to follow a multiple-revolution heliocentric cruise of 1.7 years before encountering the target comet at the intercept point. Recall however that Comet-I target remains unknown and, thus, also its intercept point. Hence, the purpose of the trajectory analysis is to provide an overview of the accessible or reachable region for a given spacecraft design, in a way such that the likelihood of successfully visiting an LPC can be derived. For this analysis to be accomplished, a large number of intersection trajectories must be optimized and studied for different Δv budgets and available time-of-flight (ToF). Several assumptions are thus made in order to keep at bay the computational costs, yet enabling the necessary accuracy and scope.

¹ <https://www.lsst.org/about/timeline>

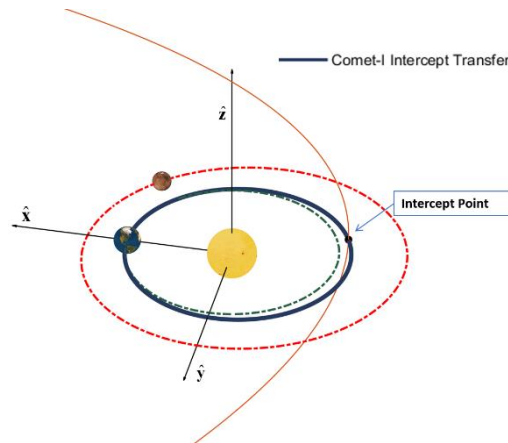


Figure 4. Example of Comet Intercept Transfer for a hypothetical LPC.

Comet-I intercept trajectory is thus divided in two distinct phases; the initial Earth escape phase and the heliocentric transfer phase. Figure 5 represent the same example of intercept trajectory as in Figure 4, but in an Earth synodic reference frame (i.e., Earth co-rotating reference frame). These two distinct phases of the intercept transfer can be distinguished in Figure 5; the overall view presents the heliocentric transfer phase, while the zoomed views portray the Earth escape phase.

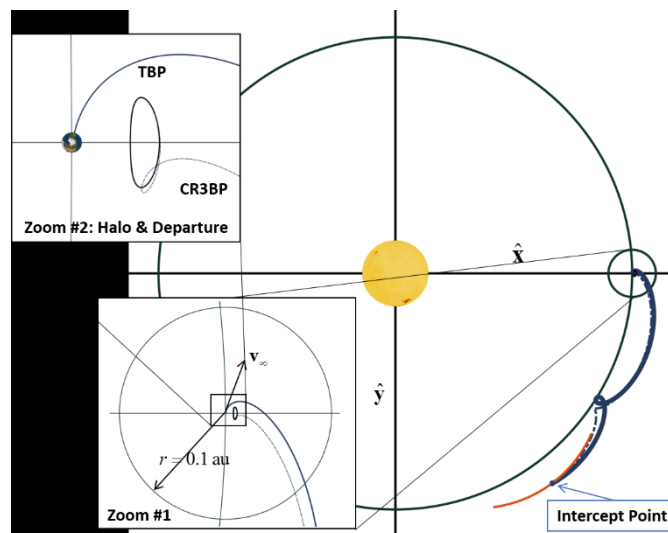


Figure 5. Example of Comet Intercept Transfer (same as Figure 4) in Synodic, or rotating, reference frame. Zoom #1 and #2 represent the Earth escape phase. Earth and Sun are plotted 30 times larger than they should be.

As shown by Ranuschio [3], the Earth gravitational perturbation is only relevant within a small distance from the Earth ($\ll 0.1$ au). Given that most of Comet-I intercept trajectory occurs outside this region, a preliminary estimate may simply model the motion of the spacecraft in a restricted Two-Body Problem (TBP) with the Sun as the main body. A patched conic approximation (and more particularly a linked conic framework on which the Earth sphere of influence is assumed of negligible size [21]) can then be used to optimise an intercept trajectory reaching the comet at the right time and at minimum Δv cost. Thus, the example in Figure 5 depicts a patched conic transfer requiring an excess escape velocity of 800 m/s. One may assume at first instance that the Δv costs in terms of spacecraft manoeuvring are also 800 m/s, especially given the case that Comet-I departs from a SE L2

orbit, hence already at the *top* of the Earth gravity well. Estimating the transfers costs through this procedure is indeed common for preliminary mission analysis [22].

Note however that Figure 5 also features a transfer designed using the Circular Restricted Three-Body Problem (CR3BP) as dynamical framework. This transfer departs from a Halo orbit of equivalent size of that expected for Comet-I and reaches the comet at the same intercept point. In this case, the transfers benefits from the natural instabilities of the Halo orbit to depart the vicinity of the SE L2 point at no cost and reach the intercept point without the need of any Δv manoeuvres (other than negligible correction and navigation manoeuvres). Hence, while the TBP-based analysis allows representative results for the heliocentric transfer phase, with a reasonable computational burden and time, a more detailed analysis of the Earth escape phase is necessary to understand the Δv costs in terms of real spacecraft manoeuvres, and not Δv as a simple sum of velocity discontinuities as measured in the TBP framework. Thus, Section 5 will firstly focus on the analysis of heliocentric transfer phase, computed through a TBP framework. Section 6 will instead expand the analysis by looking at realistic options to depart Comet-I's parking Halo orbit in order to minimize the Δv costs of the intercept transfer.

5. Preliminary Analysis of the Heliocentric Transfer Phase

This section will deal solely with the heliocentric transfer trajectory analysis, computed considering a planar (in-ecliptic) Two-Body Problem (TBP). A concession towards accounting for third-body effects is however made on the definition of the departure conditions. For the analysis carried out in this section, the orbit of the Earth is modelled as circular and the spacecraft is initially located at the SE L2 distance, orbiting the Sun with the same constant angular velocity of the Earth. It should be noted that under the previous assumptions, any comet intercept trajectory requiring an Earth leading configuration (i.e., *moving faster* than the Earth) requires the spacecraft to reduce its energy (i.e., semimajor axis), such that its period is shorter than that of the Earth. In a TBP framework, this is equivalent to a relatively large Δv manoeuvre, while in three-body dynamics this again can be achieved at no Δv -cost, through a transit trajectory [23]. Since *free* connecting transfers in terms of Δv exist between periodic orbits near the SE L2 and L1 points (see Canalias & Masdemont [24]), analysis assuming that the spacecraft starts the interplanetary transfer from SE L1 are also presented in this section.

The planar ecliptic transfer approximation mentioned above is also justified given the costs of performing out-of-ecliptic manoeuvres. Perry [25] concludes that around 95% of the synthetic LPCs generated by Boe et al. [16] have their optimal point of interception at their ascending or descending node. Hence, reducing the motion of the spacecraft to the planar case simplifies substantially the trajectory analysis without loss of relevance. According to Perry's study [25], further considerations must be made if the radius of perihelion of the target is smaller than 0.1 au or the orbit inclination is low (i.e., smaller than 10° or larger than 170°), as the optimal interception location would be positioned close to the point of Minimum Orbital Intersection Distance. However, these corner cases were not considered in this Section, since they require a three-dimensional dynamical model that would increase the computational cost and widen the search space.

Therefore, an intercept point of the heliocentric transfer phase is fully defined by two parameters: R_c , which is the heliocentric radius of the comet's orbit when crossing the Ecliptic plane, and θ , which is the phase angle at encounter, measured as Comet-Sun-Earth angle. The two dimensional or planar dynamics is expressed in terms of polar coordinates and the spacecraft is assumed to be controlled by a CP system, by an EP system or by a hybrid system that combines both. Notably, a full CP spacecraft has been already baselined in [22] as it relies on components with notable heritage to minimise the risk of the mission. However, the decision is, as of now, open for discussion. Therefore, and due to the fact that the use of CP limits the total applicable Δv and consequently the accessible region, the possibility of using EP to transfer to the comet needs to be explored. Moreover, the exploitation of both propulsive system for the interplanetary transfer is studied in this work.

The heliocentric trajectory design problem is solved as an optimal control problem (OCP) where the goal is to find the control parameters that minimize the total Δv budget (or the propellant mass) and comply with the mission requirements. The optimization variables are the magnitude and direction of the impulses for the CP trajectories, including one impulse at departure and one optional Deep Space Manoeuvre (DSM); the thrust steering law for the low-thrust EP trajectories and a combination of both for hybrid propulsion. A two-step algorithm is proposed as solution approach. Firstly, an analytical solution is obtained by computing the minimum Δv Lambert arc that connects the departure point (either SE L2 or SE L1) with the given pair R_c - θ . Thereafter, this solution is used as initial guess for a numerical optimizer that automatically transcribes the continuous OCP into a nonlinear programming problem (NLP). The transcription method is based on the Hermite-Simpson collocation approach and the interior-point solver IPOPT is employed as NLP solver. The interested reader is encouraged to check [26] and [27] where a similar approach is used to optimize low-thrust interplanetary transfer. For computing impulsive manoeuvres, the algorithms presented in [26] and [27] can be applied by optimizing the location, magnitude and direction of the chemical manoeuvres, instead of the time-discretized history of the low-thrust steering angles.

Applying this methodology allows to automatically and with minimal user-interaction perform a parametric search over the entire domain defined in terms of the encounter heliocentric distance R_c and phase angle θ . It is worth mentioning that the same methodology works for the three propulsion systems under consideration. Results are produced in terms of reachability maps.

5.1. Chemical Propulsion Trajectories

The first strategy considers that the spacecraft performs an impulsive manoeuvre with CP to exit the Earth' sphere of influence. The spacecraft is instantaneously injected into a heliocentric orbit that starts drifting towards the location of the encounter with the target comet without performing any DSM. The maximum number of complete heliocentric revolutions is limited to be lower than 3. The optimizer solves for a grid of 350 intersect points covering from 0.85 to 1.35 au. The performances in terms of required Δv to reach the different intersect points are linearly interpolated in a grid with 18,000 points. Results in the form of colour maps are provided in Figure 6, considering only the departure from SE L2 and without imposing any constraint on the time of flight. The accessible region is

represented in purple colour, and include those trajectories that need less than 750 m/s to reach the comet, as derived from the requirements in [22]. Notice that the search space of the phase angle has been limited to -150° to $+150^\circ$ to avoid the solar conjunction and the loss of signal during the fly-by, according to the requirements defined in [22].

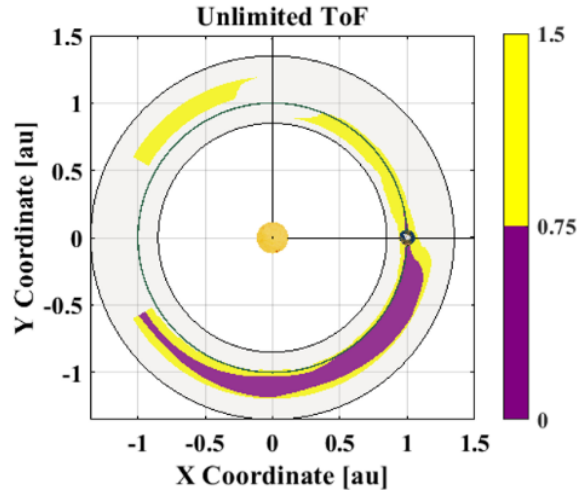


Figure 6: Accessible region for chemical propulsion departing from SE L2 in Earth synodic reference frame. The color map represent the Δv budget in km/s. Earth is scaled to the size of its classical sphere of influence.

The plot reveals that departing from SE L2 without any DSM favours the intersection of Earth-trailing comets at a distance higher than 1 au. In fact, a comet interception ahead of Earth or below 1 au is non-feasible under these assumptions. This is due to the fact that departing from SE L2 implies a penalty of about 0.5 km/s to reach intersect points with $R_c < 1$ au [22]. The maximum accessible distance is 1.18 au, while the minimum distance is limited to 1 au. The maximum phase angle is found to be -150° . The longest transfer requires 1150 days and occurs for the farthest reachable point, i.e., $R_c=1.10$ au and $\theta=-150^\circ$. This region should be considered as underestimates of the real accessible area since, following previous discussion, given sufficient warning time (see Section 6), an effectively *free* transition between the L2 and L1 region should always be possible. Such a transition would likely enable accessible regions with a more symmetrical aspect in both trailing and leading regions (see further discussion on this point in Section 6).

In Figure 7, the accessible region including trajectories departing from SE L1 and from SE L2 are shown. Three different scenarios limiting the maximum transfer time to 400, 800, and 1000 days have been simulated. Note that in these plots, the constraint on the solar conjunction is not applied to have a complete overview of the feasible region. It can be observed that allowing trajectories departing from SE L1 makes Earth-leading trajectories with $R_c < 1$ au feasible. Thus, the possibility of finding a successful comet is increased. Notably, the feasible region is not completely symmetric w.r.t. Earth, being the maximum phase angle for Earth-leading trajectories lower than for Earth-trailing trajectories. This is due to the fact that reducing periapsis (i.e., going from SE L1 to $R_c < 1$ au) has a larger cost than increasing the apoapsis (i.e., going from SE L2 to $R_c > 1$ au).

Additionally, Figure 7 showcases the effect of restricting the transfer time. In particular, reducing the transfer time does not modify the maximum accessible distance (i.e., 1.18 au)

nor the minimum accessible distance (i.e., 0.86 au). However, it significantly reduces the maximum phase angle for both Earth-leading and Earth-trailing transfers. Notably, the farthest reachable point is always found at the same heliocentric distance, 1.10 au for Earth-trailing trajectories, and 0.90 au for Earth-leading trajectories.

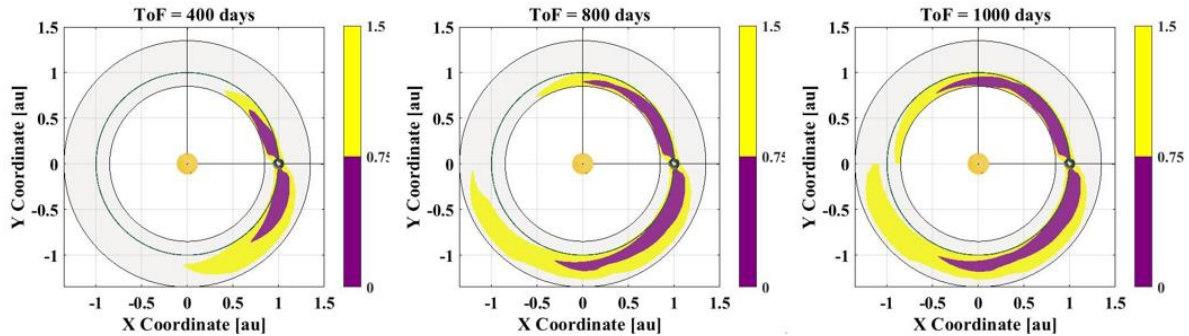


Figure 7: Accessible regions for chemical propulsion (Lambert arc) in Earth synodic reference frame. The color map represent the Δv budget in km/s. Earth is scaled to the size of its classical sphere of influence.

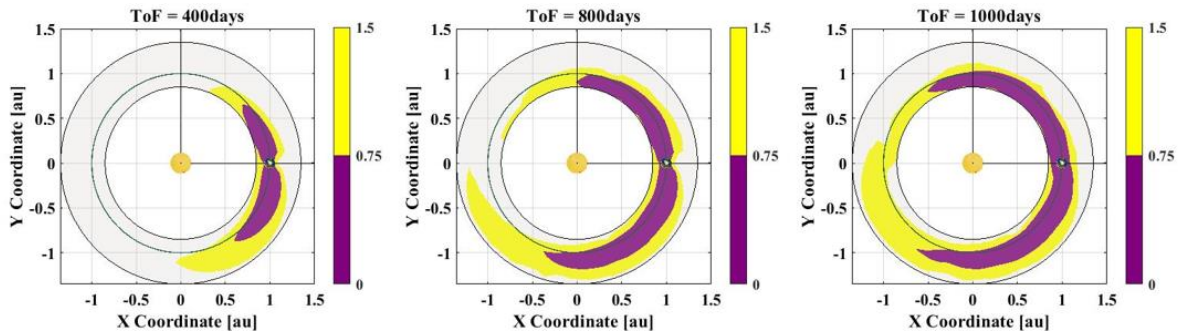


Figure 8: Accessible regions for chemical propulsion with 1 DSM in Earth synodic reference frame. The color map represent the Δv budget in km/s. Earth is scaled to the size of its classical sphere of influence.

In Figure 8, a new set of simulations have been carried out, allowing a DSM on the way to the comet to adjust the orbit phasing when necessary. It can be seen that the accessible area has been extended to intersections with Earth-leading comets with $R_c > 1$ au when departing from SEL 1. Furthermore, the new region also includes Earth-trailing comets with $R_c < 1$ au when departing from SEL 2. In the former case, the DSM is used at the periapsis of the transfer orbit to increase its velocity and consequently the apoapsis, allowing the spacecraft to reach targets above 1 au. In the latter case, the DSM is applied in the apoapsis of the transfer orbit to reduce its velocity and consequently its periapsis, allowing the spacecraft to reach targets below 1 au.

5.2. Electric Propulsion Trajectories

This strategy considers that the spacecraft is instantaneously injected into a heliocentric orbit resulting from departing from the SE L2 or SE L1 initial conditions. Thereafter, the spacecraft is allowed to manoeuvre by means of EP, including thrusting and coasting arcs where necessary. Furthermore, the maximum number of complete heliocentric revolutions is limited to be lower than 3. The optimizer solves for a grid of 350 intercept points covering from 0.85 to 1.35 au. Results in the form of colour maps are provided in Figure 9. The accessible region is represented in purple colour, and include those trajectories that needs less than 1500 m/s to reach the comet, as derived from the requirements in [22]. Note that

the colour map is expressed in terms of the propellant mass consumed. The limit for feasible trajectories is set to 72.74 kg as computed assuming an Isp of 1500s for the EP system and a spacecraft mass of 750 kg [22]. Two different EP thrusters has been simulated, one with 40mN and another one with 80 mN, in three different scenarios where the transfer time has been limited to 400, 800, and 1000 days. The thrust and Isp are assumed to be constant during the interplanetary transfer, which is reasonable for a preliminary design where the spacecraft mission stays between 0.85 and 1.35 au. Notably, the reference design of the low-thrust system at 1 au produces 40 mN. However, in order to show the benefits in terms of reachability of increasing the available thrust, another design producing 80 mN is considered.

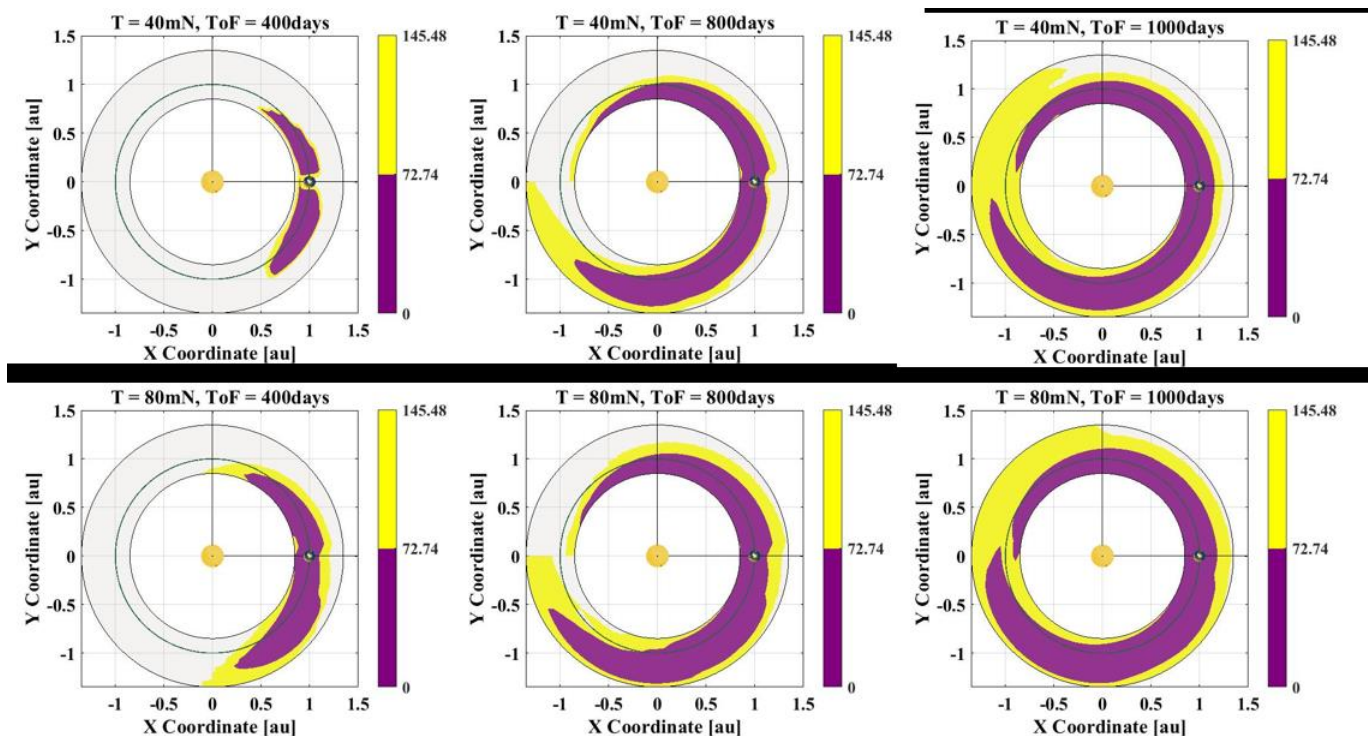


Figure 9: Accessible regions for electric propulsion. The color map represent the propellant mass in kg.

Most notably, it can be deduced that the use of EP as primary propulsion system for the heliocentric transfer widens the accessible region for Comet-I. In fact, when comparing to the results obtained for CP in Figure 8, it can be seen that the maximum phase angle and maximum distance are both increased. The yellow area in Figure 8 represents the reachable intersections for trajectories with a Δv lower than 1500 m/s. This region can be seen as an upper boundary of the low-thrust feasible trajectories, i.e., the higher the thrust the closer the feasible region will be to the boundary of the reachable disc. This is due to gravity losses resulting from the non-impulsive nature of the manoeuvres. Regarding the thrust/coast configuration the following results have been obtained. Earth-leading trajectories with $R_c < 1$ au and Earth-trailing trajectories with $R_c > 1$ au consist on a thrust arc followed by coasting phase until intersecting with the comet. Earth-leading trajectories with $R_c > 1$ au and Earth-trailing trajectories with $R_c < 1$ au includes an additional thrust arc at the

periapsis and at the apoapsis respectively. These results match those conclusions derived from the analysis of the chemical trajectories with one DSM.

The probability distribution of the total thrusting time and the thrust arc duration to transfer time ratio for the 40mN case limited to a maximum transfer time of 1000 days are illustrated in Figure 10 respectively. The mean value of the thrust time to total transfer time ratio is 16%, being the 1-sigma extremal values 25.21% and 6.79%. This result exhibits that the thrusting time for most trajectories represents a small fraction of the total transfer time. The average duration of the thrust arcs is 131 days, being the maximum 1-sigma value 204 days and the minimum 58 days. For the same case, the probability distributions of the maximum and minimum solar range are shown in Figure 11. It can be seen that the maximum found distance is 1.25 au, whereas the minimum is 0.85 au. The 1-sigma maximum distance is 1.16 au, and the 1-sigma minimum distance is 0.90 au. Therefore, the EP system should be designed to operate within the 0.90 to 1.16 au limits and for an average thrusting time of 131 days.

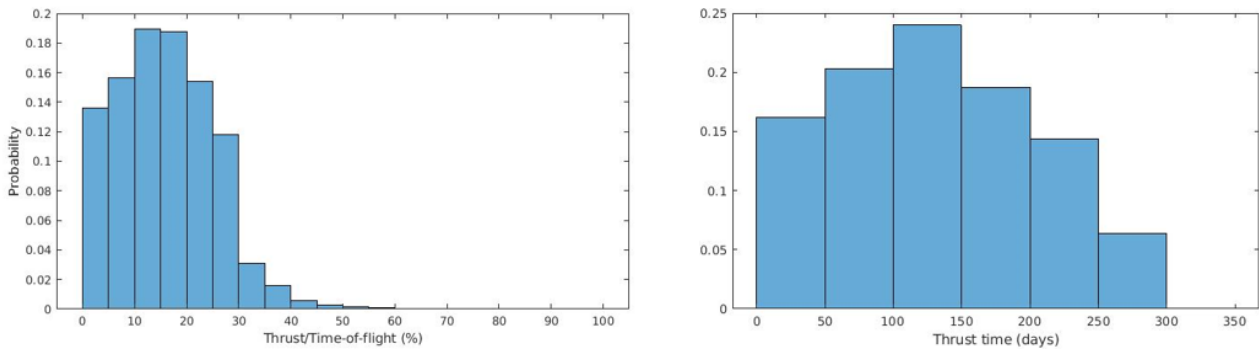


Figure 10: Thrust arc duration to transfer time ratio (left) and total thrusting time (right) probability distributions.

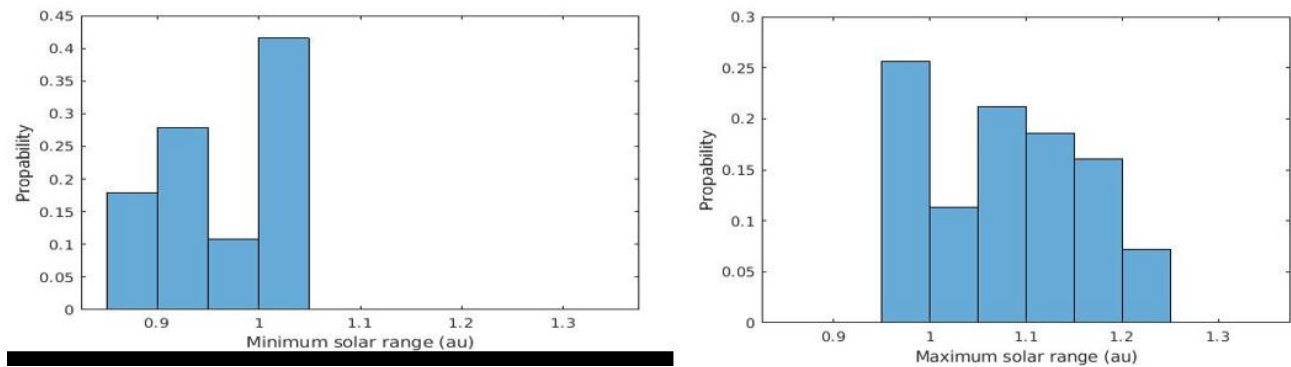


Figure 11: Minimum solar-range (left) and maximum solar range (right) probability distributions.

Furthermore, note that reducing the maximum available time or reducing the magnitude of the available thrust for the transfer reduces the maximum phase angle, both ahead and behind of Earth. In particular, when limiting the transfer time to 400 days, the spacecraft with 80 mN is able to reach comets with a phase angle of approx. 80° behind and ahead of Earth. However, if the spacecraft were propelled by 40 mN, it would only reach comets 55° behind and ahead Earth.

5.3. Hybrid Propulsion Trajectories

In this scenario, the spacecraft performs an impulsive manoeuvre with CP to depart from SE L2 or SE L1. The spacecraft is then instantaneously injected into a heliocentric orbit and is allowed to correct the trajectory by manoeuvring with an EP system. Following the same approach as in the previous subsections, a grid search has been performed for different levels of thrust, i.e., 40 mN and 80 mN, and for different maximum time-of-flights, i.e., 400 days, 800 days and 1000 days. The feasible region was defined in terms of propellant mass, the Isp of the EP was set 1500s, and the Isp of the CP was set to 300s.

The colour maps obtained are graphically similar to the results shown in Figure 9 for a full EP spacecraft. However, propellant mass savings are obtained. In Figure 12, a colour map representing the propellant mass savings in the feasible region comparing the hybrid system with 40 mN and 400 days maximum time of flight of the full EP system is shown. It can be seen that trajectories closest to and farthest from Earth are the most benefited from the initial impulse, saving up to 60 kg of fuel.

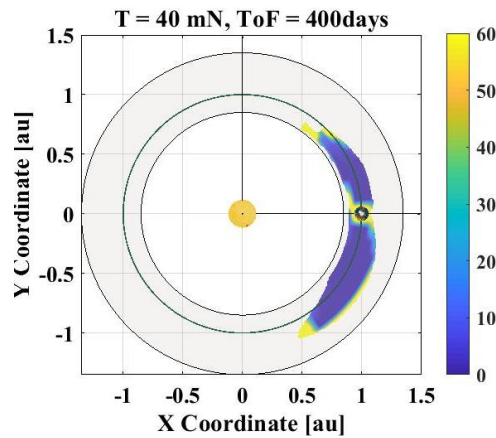


Figure 12: Propellant mass savings (Kg) obtained with the Hybrid system compared to a full EP transfer.

6. Earth Escape Departure Options

The analysis in Section 5 considered a dynamical model compatible with a TBP patched-conic approximation. In a classic patch-conic framework, a departure trajectory is treated as a trajectory escaping the Earth's sphere of influence (SoI), and the Earth's SoI is assumed to be of negligible size (i.e., $R_{SoI}=0$), as compared with the Earth-Sun distance. However, similarly to Sánchez-Pérez et al. [22], here we have considered Comet-I as departing from the Sun-Earth L2 point, with the same angular velocity of the Earth. Such a departure condition would be equivalent to an excess velocity v_∞ of about 300 m/s in a patched-conic framework. Note that here we compare the equivalent semimajor axis (see Ranuschio [3]), rather than the difference in velocity; thus the results differ slightly from those reported in [22].

As already pointed out in Section 5, *free* connecting transfers exist between periodic orbits near the SE L2 and L1 points (see [24]). Hence, if a new surveyed LPC is reachable by means of an Earth-leading transfer (i.e. transfer with a heliocentric orbit with a shorter than 1 year period), an effectively *free* transition between the L2 and L1 region should be possible, as long as sufficient warning/transfer time is available. Considering this, transfer in Section 5 assumed a convenient departure either from SE L2 or L1 point, in order not to over-penalise the Δv transfers costs due to a somewhat simplistic patched-conic dynamical

framework. However, while a transfer from an L2 configuration to an equivalent L1 departure may be possible at a virtually negligible Δv -cost, the total time of flight will not be negligible. This section will analyse in more detail Comet-I departure options. As a prelude of this analysis, it should be remarked that ISEE-3/ICE spacecraft [18] departed from a SE L1 Halo orbit to visit the Earth geomagnetic tail (i.e., L2 region), it then performed a double lunar swing-by and departed towards comet Giacobini-Zinner with an excess velocity v_∞ of about 1.5 km/s.

6.1. Exploiting the natural instability of the SE L2 point

Both ARIEL and Comet-I spacecraft will be inserted by Ariane 6.2 into a free-insertion transfer to a Sun-Earth L2 large amplitude Halo orbit. While the exact orbit is not yet known, all available options (see [22]) represent departure conditions from higher energy levels than that of the specific L2 point; thus, potentially higher departure excess velocities too. However, an specific analysis of departure conditions is relevant given that all large amplitude halo orbit will have periods around half a year [28]. Thus, Comet-I may not have the opportunity to choose the optimal departure configuration from the Halo orbit. The analysis carried out here assumes a Halo orbit such as that in Figure 13; i.e., an 850,000 x 600,000 km y and z axis amplitude orbit, respectively.

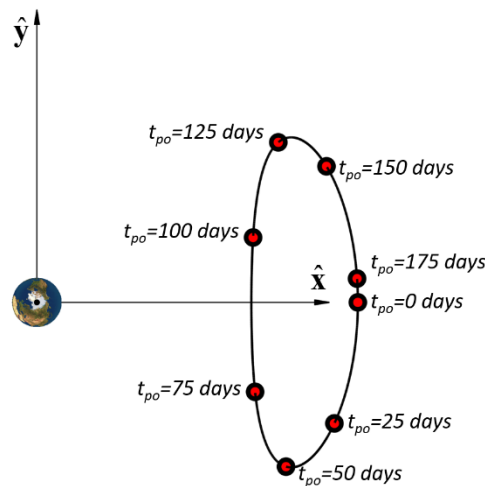


Figure 13. Halo orbit view from positive z axis. The period of this Halo orbit is 179 days.

Figure 13's Halo is also represented in Figure 5, together with a departure option that enables an equivalent patched-conic excess velocity v_∞ of about 800 m/s. Figure 14 shows the equivalent patched-conic excess velocity at departure as a function of different departing locations along the Halo orbit (i.e. t_{po}) [3]. The Halo orbit departure trajectories are here generated by perturbing the Halo orbit state vector in the direction of the unstable hyperbolic invariant manifold. Here, a Δv of 10 m/s is applied on the direction of the unstable eigenvector associated with the periodic orbit in order to generate the departure conditions. Given the asymptotic behaviour of the hyperbolic unstable manifold, smaller perturbations would result in slower departures from L2 [23], while larger Δv manoeuvres would result in lesser benefit on the form of *free* Δv [5].

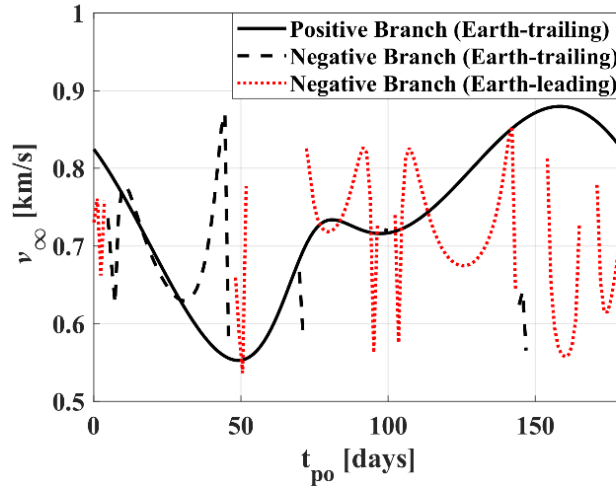


Figure 14. Escape velocity for direct departure trajectories

It should be noted that the hyperbolic invariant manifold has a positive branch that departs directly towards heliocentric trajectories, while its negative branch falls back into Earth centred trajectories. The trajectories in the negative branch can either finally depart through the L2 point towards heliocentric orbits with semimajor axis larger than 1 au and, consequently into Earth-trailing configurations, or depart through the L1 point into heliocentric orbits with semimajor axis smaller than 1 au (Earth-leading configurations). Indeed, it should be noted in Figure 14 that some data is unavailable for small particular ranges of departing conditions (i.e. t_{po}). This is due to the fact that their perturbed invariant manifold trajectories take too long to depart the Earth's neighbourhood to be considered in the analysis (> 2 years). The following subsection expand on the issue of the time of flight to complete the Earth departure phase.

6.2. Combining manoeuvring and dynamical instability

In order to speed up the Earth escape phase, some manoeuvres can be added to the naturally occurring unstable manifolds. For this study [5], direct escape trajectories from an orbit around SE L2 point (manifold positive branch) have been analysed. Similarly to the results in Figure 14, escape trajectories are computed by perturbing the Halo orbit on the direction of the unstable eigenvector but with initial impulses ranging from 10 to 200 m/s. Figure 15 shows both the escape times and geocentric relative escape velocities (v_{∞}) for all these direct escape options. Note that here *escape time* is defined as the time for the Earth escape trajectory to reach a distance of 0.02 au from Earth [22]. The direct consequence of these non-negligible initial impulses is that escape times experience a considerable reduction (approximately halves for all the different escape velocities v_{∞}). Firstly, it should be highlighted that the patched-conic TBP transfers computed in Section 5 take between 20 to 70 days to clear the same 0.02 control radius from Earth (depending on direction and equivalent escape velocity v_{∞}). Hence, benefiting from the natural instability of the SE L2 implies some penalization in terms of transfer time. Also, it is worth noting that the magnitude of the initial velocity impulse at departure of the Halo orbit appears to be ineffective at increasing the final escape velocities. The ranges of available escape velocity v_{∞} for at any given initial velocity impulse appear relatively unchanged and mostly affected by the departure point of the orbit. However, increasing the magnitude of

the initial velocity impulse is effective at reducing transfer times. An example of these escape trajectory options can be observed in Figure 16.

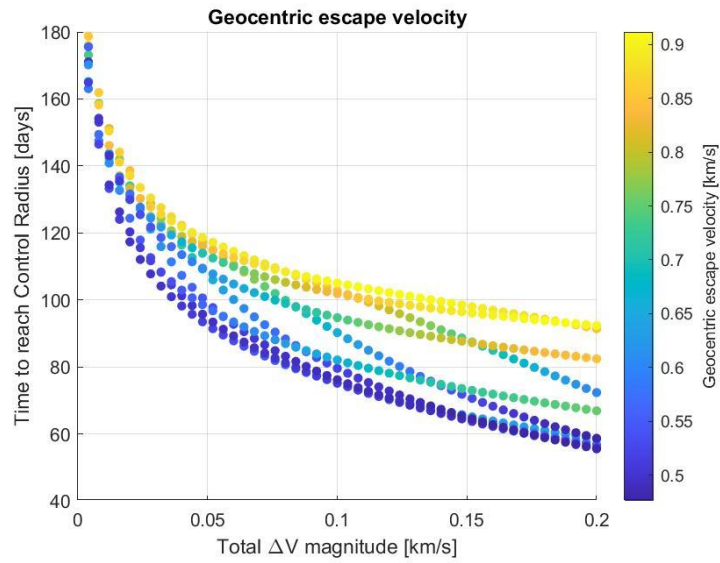


Figure 15. Geocentric relative escape velocity v_{∞} for direct escape trajectory options. Velocity increment versus escape time plot. Control radius is here defined as a distance of 0.02 au from Earth.

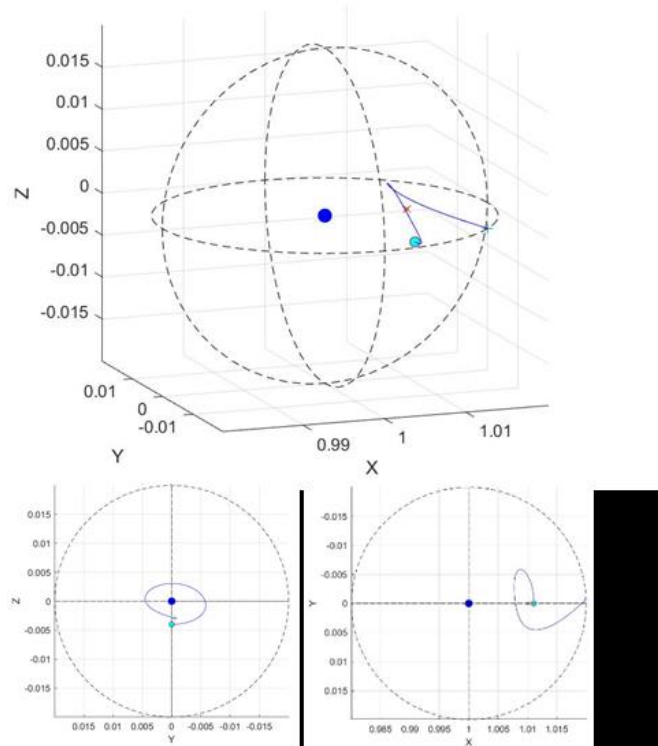


Figure 16. Example of direct escape trajectory. The blue line shows the trajectory. The Earth is plotted as a blue circle, on the centre of the control radius, SE L2 point as a red cross. And the control sphere is illustrated in black dashed line. The image is displayed form three standpoints: perspective view, YZ plane and XY plane.

Trajectories that escape from an orbit around SE L2 point towards the Earth (manifold negative branch) are now added two manoeuvres to analyse the potential enhancement their performance. The manoeuvres include an initial impulse in the direction of the

unstable manifold, similar to the one applied to the previous group, and a second impulse at the Earth's close approach. As shown in Figure 17, these trajectories also undergo a large decrease in escape time (from around 360 to 166 days). This departure option (negative branch+2 manoeuvres) also allows for some extra, but limited, flexibility to reach out-of-the-ecliptic heliocentric orbits; allowing for inclinations of up to 2 degrees. Figure 18 displays an example of escape trajectory following the manifold negative branch.

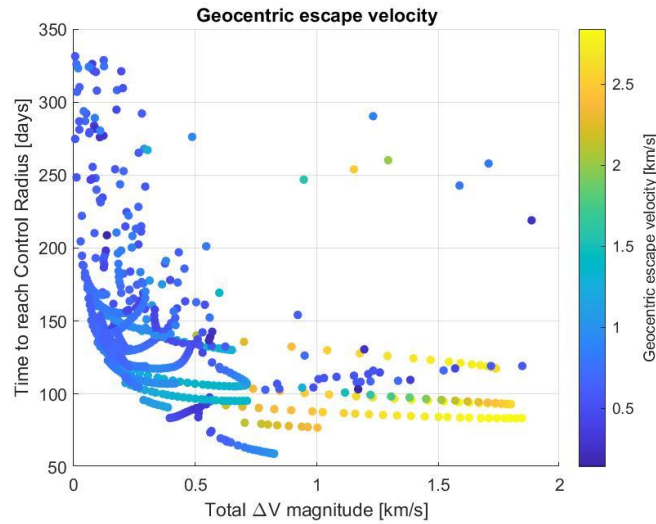


Figure 17. Geocentric velocity, for escape trajectories with Earth approach. Velocity increment versus escape time plot.

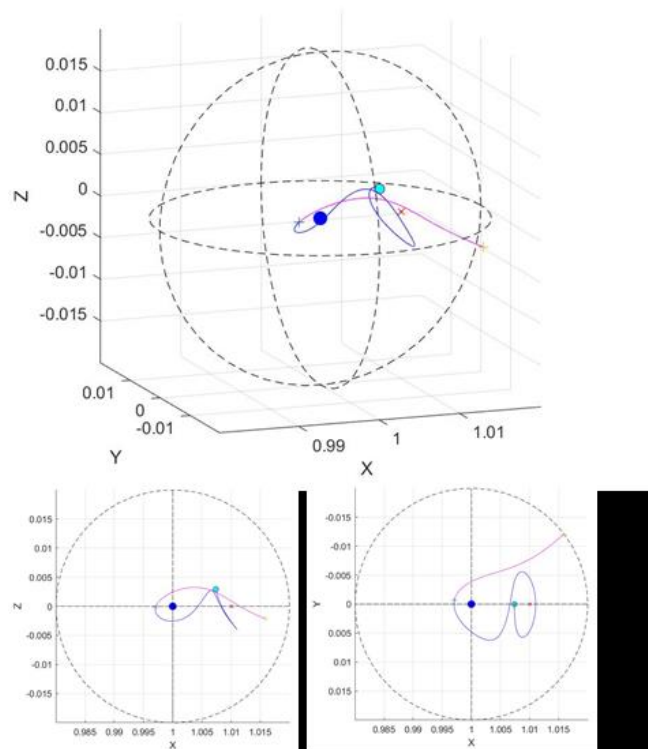


Figure 18. Example of escape trajectory with Earth approach. The blue line shows the first trajectory arc and the pink line shows the second one. The Earth is plotted as a blue circle, on the centre of the control radius, SE L2 point as

a red cross, and the departure point as a cyan small circle. And the control radius is illustrated in black dashed line. The image is displayed from three standpoints: perspective view, XZ plane and XY plane.

Altogether, very efficient options to escape exist, depending on the available time and fuel. If the gain in geocentric escape velocity is prioritised, options that obtain up to 2.32 km/s of excess velocity v_∞ can be found, which would need Comet-I to add 700 m/s of its own, but obtain 1.62 km/s of free Δv and a time of flight of 104 days. Then, if the time to escape is considered to be the most important parameter, options needing 56 days are feasible, by applying an impulse of around 200 m/s and obtaining excess velocity v_∞ of about 500 m/s. Among the whole range of options, options such as that represented in Figure 5, offer excess velocities v_∞ of about 800 m/s at moderate escape times (≥ 100 days). It should be mentioned that the results of the obtained escape trajectory have a strong dependence on the orbit's departure point, as seen in Figure 14.

6.3. Lunar swing-by departure options

It is finally of relevance to note that most of the negative branch invariant manifold trajectories reach the orbit of the Moon. Hence, opening up the possibility of adding at least one lunar swing-bys to the departure phase. Figure 19 shows two example of Comet-I departure transfers, both following the negative branch of the hyperbolic manifold and including a single lunar swing-by. These trajectories were modelled as nearly-ballistic transfers in a Sun-Earth planar circular restricted three body problem (PCR3BP) with departure conditions defined within a planar Lyapunov orbit of similar y axis amplitude as the Halo orbit represented in Figure 13. The Moon flyby is here computed by means of a two-body patched conic framework, where the Moon flyby is modelled as an instantaneous rotation of the Moon-spacecraft relative velocity vector. Full details on the dynamical model can be found in Ranuschio [3].

In order to model departures trajectories such as those in Figure 19, the position of the spacecraft and that of the Moon along their respective orbits need to be known for the specific epoch of the discovery of the targeted LPC. Since the latter is not known and will not be known until the serendipitous discovery occurs, the initial ephemeris of both Moon and spacecraft need to be treated as homogeneously distributed random variables. Hence, a Monte Carlo analysis is performed to understand the realistic expectations for the *free* v_∞ excess velocity that can be gained through the Earth and Moon gravitational perturbations. Yet, given the sensitivities of the three-body motion near the Lagrange points, an optimization process is required for each Monte Carlo case to optimize the exact departure manoeuvre from the Libration Point Orbit, LPO, ($\Delta v \leq 10$ m/s), departure point along the LPO and altitude of the lunar fly-by that maximises the final v_∞ -equivalent excess velocity. Following [22], the minimum lunar fly-by altitude allowed for this analysis is of 5,000 km altitude, which certainly reduces the navigation challenges, at the cost of limiting the gravitational gains. Further details on the set up for this analysis can be read in Ranuschio [3].

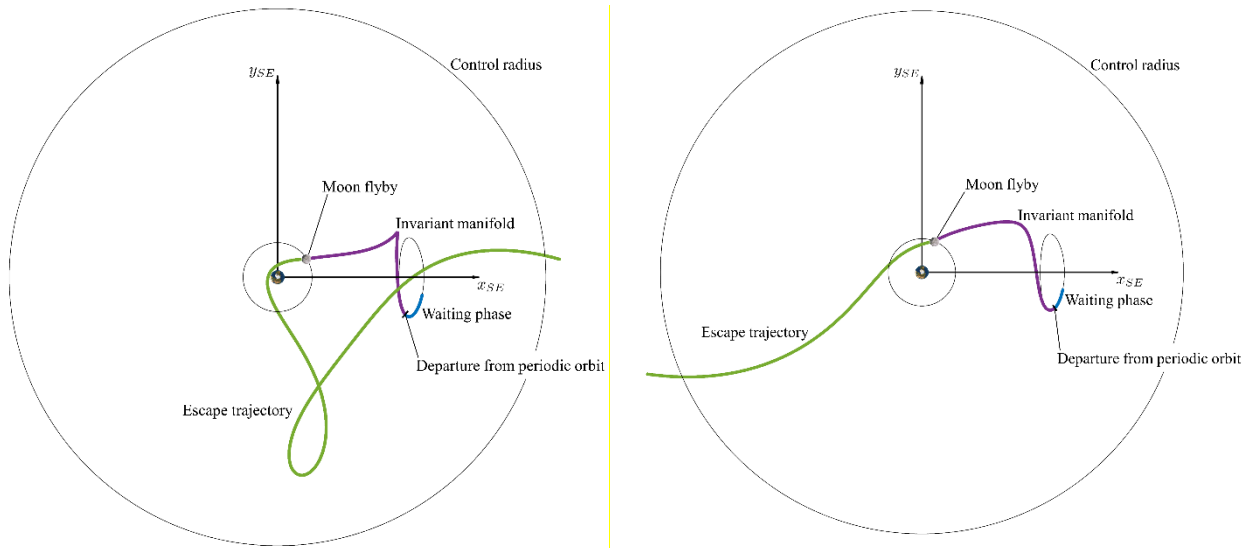


Figure 19. Two examples of Comet-I departure transfers including a lunar swing-by. On the right, the departure starts on the negative branch of the invariant manifold, it intersects the Moon and, finally, departs through the L2 direction towards an intersect transfer in an Earth-trailing configuration (due to the semimajor axis larger than 1 au of its heliocentric orbit). On the left, the departure also starts on the negative branch, intersect the Moon and finally departs on the L1 direction: this implies an Earth-leading configuration for its intersection orbit.

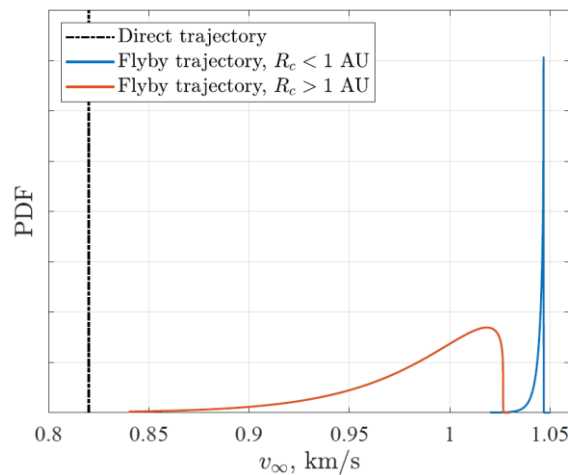


Figure 20. PDF of the escape velocities obtained from the Monte Carlo Simulation (Ranuschio [3]).

Figure 20 shows the probability density function (PDF) resulting from the 400 Monte Carlo runs of the aforementioned process [3]. These results demonstrate that the expected benefit in terms of Δv of including one single lunar swing-by is of about 200 m/s. Figure 21 instead shows the PDFs for the departure transfer time of flight (ToF). This time of flight is here defined as the time it takes the trajectory to reach a distance of 0.2 au from the Earth [3]. In order to properly benchmark these results a similar Monte Carlo analysis is generated for the direct departure transfer option (no lunar swing-by). Note that these time of flights to escape are equivalent to those in Section 6.2, yet they are computed up to the time the escape trajectory reaches a distance one order of magnitude larger than in the previous section. As a consequence, the times are also larger as well.

As expected, when Earth-trailing interception are considered ($R_c > 1$ au) the use of the negative branch of the hyperbolic manifold implies longer ToF even if a lunar swing-by is

included. However, when an Earth-leading interception is attempted ($R_c < 1$ AU), the lunar swing-by has the double benefit of shortening the ToF by 200 days, as well as increasing the v_∞ -equivalent excess velocity by 200 m/s. Note that the flat homogenous pdf for direct transfers is due to the fact that the upper bound of the waiting time at the LPO is 0.8 years, which is larger than its complete period. As a consequence, all direct transfers simply wait for the optimal conditions to depart.

To conclude, this analysis demonstrates that, regardless of the exact phase of both spacecraft and Moon on their respective orbits at the time of the target LPC discovery, if sufficient warning time is available, a well-designed lunar gravity assist will reduce transfers costs by about 200 m/s; allowing for a total of 1 km/s of “free” v_∞ -equivalent Earth excess velocity. Also, and perhaps more importantly, a lunar swing-by will be beneficial both in terms of extra Δv -budget and shortening transfer times for interceptions in Earth-leading configurations. It should be noted that there is a 50% chance that the targeted LPC requires such an interception configuration.

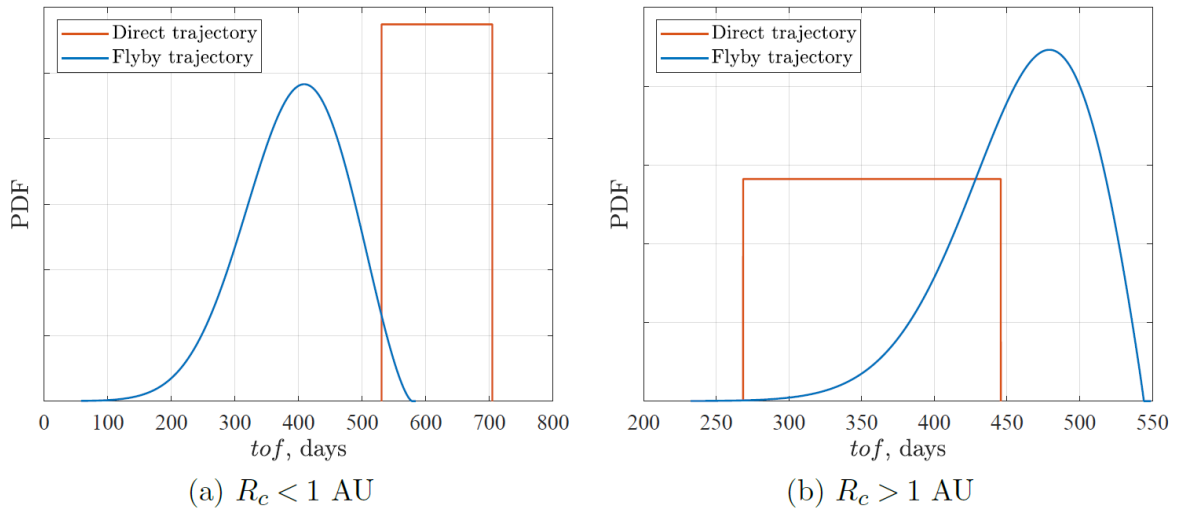


Figure 21. Comparison between the time of flight of the direct escape and the flyby escape obtained from the Monte Carlo Simulation.

7. Comet Interceptor Monte Carlo Simulation

Given the uncertainties on the availability of accessible LPC targets, it is key to understand the potential risk that Comet-I may not have the opportunity to fly to a pristine LPC. In order to provide a rough estimate for this risk, as well as to inform the mission design such that the risk may be minimized, a Monte Carlo simulation environment is set up.

This Monte Carlo simulates 10,000 mission scenarios. For each mission scenario, an average of 2.1 LPCs are randomly generated yearly for a mission duration spanning a maximum of 6 years. The decade 2010-2019 saw a total of 21 new LPCs with a nodal point within the accessible range [0.9,1.25] au; i.e. 2.1 LPCs a year. This range of [0.9,1.25] au is used here in order to account for both Δv budget constraints, as well as thermal design constraints [2]. The intercept points of each LPC are randomly generated using a homogenous distribution for both heliocentric distance R_c and Earth phase angle θ of the intersection. Next, a warning time is also allocated to each randomly generated LPC, based

on the results of an LPC detection efficiency analysis of the survey simulation environment developed for the LSST [14, 16, 19, 20].

The transfer Δv cost to intercept a randomly generated LPC is then interpolated from the data set presented in Section 5. This Monte Carlo Analysis allows extracting a reliable measure of the probability to complete the mission within an allocated mission timespan. The results of this analysis are summarized in Figure 22.

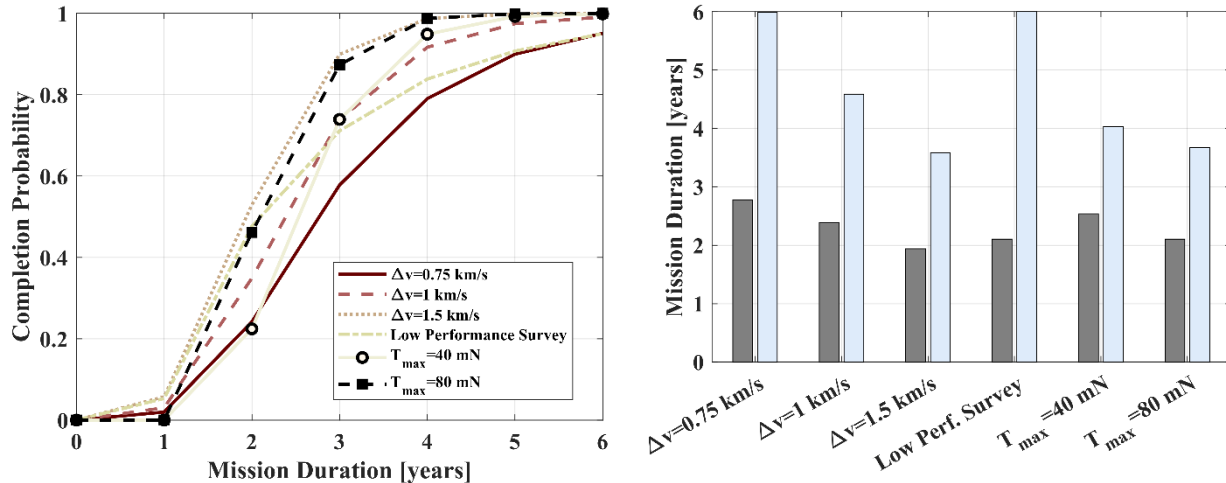


Figure 22. Probability of successfully completing Comet-I mission within the allocated mission timespan (i.e., 6 year). Left figure: Cumulative probability as a function of mission duration for a set of different scenarios and Δv budgets. Right figure: median mission duration and 95%-confidence mission duration for the same set of mission scenarios. These mission scenarios are: (1) Δv -budget of 750 m/s, (2) Δv -budget of 1 km/s, (3) Δv -budget of 1.5 km/s, (4) Δv -budget of 1.5 km/s and a survey performance featuring a (40-17-7)% discovery efficiency, rather than the (90-80-75)% used in the rest of the scenarios, (5) Continuous low thrust transfer with maximum thrust capability at 40 mN, (6) Continuous low thrust transfer with maximum thrust capability at 80 mN. Both low thrust scenarios (5 and 6) assume 89 kg of propellant and this an equivalent Δv capability of 1.5 km/s.

Before conclusions can be drawn, results in Figure 22 need to be discussed in detail. As stated in the Comet-I Mission requirements document [13], Comet-I propulsive capacity will likely be of 750 m/s (accounting also for about 10% of navigation manoeuvres [22]), if the final design settles for a chemical propulsion configuration [2]. It shall also be reminded however that the heliocentric transfer costs from Section 5 assume only a patched-conic TBP framework and, thus, Δv estimates neglect the potential benefit of the dynamical instabilities of the departure conditions for Comet-I, and the potential benefits of a lunar swing-by. For example, Figure 20 shows how direct departure options may provide about 800 m/s of excess velocity, while a lunar swing-by may allow about 1 km/s. Hence, a lunar fly-by option is likely to add +700 m/s to the dynamical framework set-up considered in Figure 22 (recall that 300 m/s were gained from a SE L2/L1 point departure [3]). Hence, the effective Δv performance of Comet-I should be somewhere in the range of 1 to 1.5 km/s for the purpose of this Monte Carlo results.

Another important source of uncertainty relates with the expected discovery efficiency of the LSST survey, and the associated warning time for the target LPCs. All scenarios generated in Figure 22, except scenario (4), which is labelled as *Low Performance Survey*, consider a warning time (i.e., time from discovery of the LPC to the interception

opportunity) following the estimated LSST discovery efficiency reported by Jones et al. [14]. As stated in Section 2, this is equivalent to assume that 90% of the LPCs will be spotted beyond the orbit of Jupiter, 80% should allow for more than 2 years of warning time and about 75% should allow for more than 3 years of warning time. However, there is still substantial uncertainty on these warning times, which spawn from the unknowns on the evolution of the brightness expected for dynamically new or very *fresh* LPC targets, among other factors. In an attempt to understand the sensitivity of the Monte Carlo results related with the uncertainties on the warning time, a *Low Performance Survey* able to detect only 40% of the LPCs beyond the orbit of Jupiter, 17% with more than 2 years and 7% with more than 3 years warning time is found to achieve a 95% success confidence with 6 years of mission duration. Considering that the LSST survey will scan the night sky at a visual limiting magnitude three points deeper than current surveys, this survey performance seems indeed achievable.

Hence, results in Figure 22 provide only a preliminary estimate and should be followed by a much more specific Monte Carlo simulation. Nevertheless, they should provide a solid confirmation of the robustness of the mission concept. Indeed, the results show how the risk of not having at least one good opportunity to fly-by an LPC is low; in the order of 1 to 5 %. Interestingly, it also shows how there is a good probability that the mission will be completed in very few years. The median mission duration (i.e. 50% completion likelihood) ranges from 2 to 3 years for all the scenarios represented in Figure 22. Note that the mission duration has not considered neither the time from launch to the decommissioning into the L2 orbit, nor the time from the comet fly-by to the completion of the transmission of all the science data.

Nevertheless, even in the unlikely event that no accessible LPC is found during the allocated waiting time in L2 (~3 to 4 years), Comet-I science team identified a list of potential backup short period comets as alternative targets [22, 29].

8. Conclusions and Final Comments.

The lack of specific target and the uncertainties on the orbital characteristics of the future discovered LPCs, implies large mission uncertainties, which bring clear challenges to Comet-I mission design. Hence, the mission design must be underpinned by a solid understanding of the trajectory options and the relative merits of different design alternatives. Given the lack of specific target, these merits can only be measured on a statistical basis, in terms, for example, of the accessible region or the mission success probability.

The trajectory design of Comet-I can be divided in two clear phases; the Earth departure and the heliocentric intercept trajectory. These have been studied separately through three different tightly supervised MSc research projects and their results are synthesized in the document. The different models and conclusions allow to build a preliminary Monte Carlo simulation that demonstrate a 95 to 99% likelihood of successfully visiting a pristine LPC with a chemical propulsion configuration ($\Delta v \sim 750$ m/s) and the added benefit of some third-body gymnastics to depart the Earth's gravity well.

It should be noted that the results presented here are preliminary; as in the sense that more accurate representations of Comet-I trajectories and further understanding of the

properties of LPCs and their discovery as a function of heliocentric distance, should confirm their validity. With regards the trajectory design, the paper has presented the Earth escape phase and the heliocentric transfer phase as completely separate parts. Evidences that a particular comet intercept trajectory can benefit from the Earth escape phase is provided in the example in Figure 4 and Figure 5 in this paper, as well as in several examples in Ranuschio [3] (see Chapter 6). Further to this, it should be noted that most of the Δv cost of comet intercept transfers is associated with the need to change the spacecraft's semimajor axis, so that it can drift to the necessary phase angle (θ) of the comet intercept point. Given that the control radius is small, achieving an equivalent excess velocities v_∞ (in the general trailing or leading direction) ensures that the spacecraft will reach the vicinity of the intercept point with the same transfer time. However, the process of computing and end-to-end transfer is rarely as simple as patching a TBP heliocentric trajectory with a C3BP escape at a given distance from the Earth (i.e. control radius), since the position and velocity components of the state vector will not match completely. Hence, this process requires rather to find a (dynamical) substitute transfer that reaches the same intercept point at the same time.

Finally, this paper brings to a conclusion the Cranfield-DEIMOS Space research collaboration for Comet-I mission studies that was carried out in the second and third quarters of 2020.

Acknowledgements

The authors would like to acknowledge the support of ESA and all the national space agencies involved in Comet-I, as well as all the engineers and scientist at ESA and the Science Team that contribute towards a successful mission. Lastly, the authors would also like to thank to all of those who made the work in times of pandemic possible, which include both IT support and our families at home.

References

- [1] C. Snodgrass, G.H. Jones, The European Space Agency's Comet Interceptor lies in wait, *Nature Communications*, 10 (2019) 5418.
- [2] ESTEC Concurrent Design Facility, Comet Interceptor CDF Study Report: CDF-201(C), ESA,
- [3] D. Ranuschio, Comet Interceptor: Optimisation of quasi-ballistic departure opportunities by means of a lunar swing-by, Master Thesis, Politecnico di Milano, Milan, Italy, 2020.
- [4] A. Estalella, Comet Interceptor Hybrid Trajectories Optimisation, MSc in Astronautics and Space Engineering Thesis, Cranfield University, Cranfield, UK, 2020.
- [5] D. Viera Rodriguez, Design Optimization of Earth Escape Low-Energy Trajectories with Low-Thrust Propulsion, MSc in Astronautics and Space Engineering Thesis, Cranfield, Cranfield, UK, 2020.
- [6] Comet-I SST, Comet Interceptor Science Requirements Document ESA, ESA-COMET-SCI-RS-001.
- [7] K.J. Meech, R. Weryk, M. Micheli, J.T. Kleyna, O.R. Hainaut, et al., A brief visit from a red and extremely elongated interstellar asteroid, *Nature*, 552 (2017) 378-381.
- [8] P. Guzik, M. Drahus, K. Rusek, W. Waniak, G. Cannizzaro, et al., Initial characterization of interstellar comet 2I/Borisov, *Nature Astronomy*, 4 (2020) 53-57.

- [9] D. Seligman, G. Laughlin, The Feasibility and Benefits of in Situ Exploration of 'Oumuamua-like Objects, *Astronomical Journal*, 155 (2018).
- [10] M. Królikowska, P.A. Dybczyński, Discovery statistics and the $1/a$ -distribution of long-period comets detected over the 1801-2017 period, arXiv preprint arXiv:1901.01722, (2019).
- [11] R.L. Jones, C.T. Slater, J. Moeyens, L. Allen, T. Axelrod, et al., The Large Synoptic Survey Telescope as a Near-Earth Object discovery machine, *Icarus*, 303 (2018) 181-202.
- [12] Comet Interceptor Spacecraft - Phase A/B1 Inivation to Tender: Statement of Work, European Space Agency, ESA-COMET-CON-SOW-001.
- [13] Comet-I Project Team, Comet Interceptor – Mission Requirements Document, ESA, ESA-COMET-SYS-RS-001.
- [14] G. Jones, C. Snodgrass, e. al., Comet Interceptor: A Mission to a Dynamically New Solar System Object, Proposal ESA F1 call (2019).
- [15] B.G. Marsden, Sungrazing Comets, *Annual Review of Astronomy and Astrophysics*, 43 (2005) 75-102.
- [16] B. Boe, R. Jedicke, K.J. Meech, P. Wiegert, R.J. Weryk, et al., The Orbit and Size-Frequency Distribution of Long Period Comets Observed by Pan-STARRS1, *Icarus*, (2019).
- [17] P. Wiegert, S. Tremaine, The evolution of long-period comets, *Icarus*, 137 (1999) 84-121.
- [18] R. Farquhar, The flight of ISEE-3/ICE - Origins, mission history, and a legacy, in: AIAA/AAS Astrodynamics Specialist Conference and Exhibit, American Institute of Aeronautics and Astronautics, 1998.
- [19] F. Delgado, A. Saha, S. Chandrasekharan, K. Cook, C. Petry, et al., The LSST operations simulator, in: Modeling, Systems Engineering, and Project Management for Astronomy VI, International Society for Optics and Photonics, 2014, pp. 915015.
- [20] R.L. Jones, P. Yoachim, S. Chandrasekharan, A.J. Connolly, K.H. Cook, et al., The LSST metrics analysis framework (MAF), in: Observatory Operations: Strategies, Processes, and Systems V, International Society for Optics and Photonics, 2014, pp. 91490B.
- [21] M. Ceriotti, Global optimisation of multiple gravity assist trajectories, PhD Thesis, University of Glasgow, Glasgow, Scotland, 2010.
- [22] J.M. Sánchez, L. Bucci, N. Skuppin, Comet Interceptor: Consolidated Report on Mission Analysis, European Space Agency, ESA-COMET-MIS-RP-001.
- [23] W.S. Koon, M.W. Lo, J.E. Marsden, S.D. Ross, Dynamical systems, the three-body problem and space mission design, Marsden Books, 2008.
- [24] E. Canalias, J. Masdemont, Homoclinic and heteroclinic transfer trajectories between planar Lyapunov orbits in the sun-earth and earth-moon systems, *Discrete and Continuous Dynamical Systems - Series A*, 14 (2006) 261 - 279.
- [25] R. Perry, Mission Analysis of Intercepting a Dynamically New Comet from a Halo Orbit Launch around the Sun–Earth L2 Libration Point, MSc in Astronautics and Space Engineering Thesis, Cranfield University, 2019.
- [26] D. Morante, M. Sanjurjo Rivo, M. Soler, Multi-objective low-thrust interplanetary trajectory optimization based on generalized logarithmic spirals, *Journal of Guidance, Control, and Dynamics*, 42 (2019) 476-490.
- [27] D. Morante González, Hybrid multi-objective trajectory optimization of low-thrust space mission design, PhD Thesis, University Carlos III de Madrid, 2020.

- [28] G. Gómez, J. Llibre, R. Martínez, C. Simó, *Dynamics and Mission Design Near Libration Point Orbits—Fundamentals: The Case of Collinear Libration Points*, World Scientific, Singapore, 2000.
- [29] M.E. Schwamb, M.M. Knight, G.H. Jones, C. Snodgrass, L. Bucci, et al., Potential Backup Targets for Comet Interceptor, *Research Notes of the AAS*, 4 (2020) 21.

- Comet-I mission aims to explore a Long Period Comet; ideally, dynamically new.
- Such a target will remain unidentified, possibly, even after launch.
- The paper analyses the orbital space that will be accessible for Comet-I S/C.
- Chemical, electric and hybrid propulsion systems are modelled in patched-conic.
- A Monte Carlo analysis shows a 95-99% of completing the mission within 6 years.

Declaration of interests

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

The authors declare the following financial interests/personal relationships which may be considered as potential competing interests:

2021-07-16

ESA F-Class Comet Interceptor: trajectory design to intercept a yet-to-be-discovered comet

Sánchez, Joan-Pau

Elsevier

Sánchez JP, Morante D, Hermosin P, et al., (2021) ESA F-Class Comet Interceptor: trajectory design to intercept a yet-to-be-discovered comet. *Acta Astronautica*, Volume 188, November 2021, pp. 265-277

<https://doi.org/10.1016/j.actaastro.2021.07.014>

Downloaded from Cranfield Library Services E-Repository