



Proceeding Paper

Use of Bayesian Networks to Understand Sustainability Requirements [†]

Andrea Spinelli *  and Timoleon Kipouros 

Faculty of Engineering and Applied Sciences, Cranfield University, Cranfield, Bedford MK430AL, UK;
t.kipouros@cranfield.ac.uk

* Correspondence: andrea.spinelli@cranfield.ac.uk

[†] Presented at the 14th EASN International Conference on “Innovation in Aviation & Space towards sustainability today & tomorrow”, Thessaloniki, Greece, 8–11 October 2024.

Abstract: Sustainability is a key requirement in contemporary engineering design, but it is difficult to quantify due to its multidimensionality. We propose the application of Bayesian Networks for modeling the cause and effect of engineering systems and their environment. Emphasis is placed on capturing the impact on sustainability indicators of design decisions. These include the performance of the system, its economic viability in terms of cost, and its environmental and societal impacts. The method leverages data from simulation models, enabling the designer to perform assumption-free inferences on the variables at play.

Keywords: Bayesian networks; engineering requirements; design space exploration; sustainability

1. Introduction

Sustainability has emerged as a crucial aspect in modern engineering design, integrating considerations of environmental and societal impact alongside traditional cost and performance requirements [1]. However, both the quantification and incorporation of sustainability requirements pose a significant challenge due to their multifaceted and objective nature. Furthermore, designers may have difficulty interpreting the trade-offs between these two types of requirements. Indeed, the designer may be hindered by conventional design approaches, which act as a cognitive bias in the design process [2]. For example, designers may be predisposed to adopt familiar solutions that have proven effective in the past but may not be the most sustainable ones available.

Currently, the most common approach to incorporate sustainability indicators is through the use of multiattribute value theory (MAVT) methods [3–5], which map the design parameters to a sustainability score with one or more value functions. While the implementation is relatively simple, this method may obscure the interdependencies between variables and does not inherently account for uncertainty in the requirements.

This study explores the application of Bayesian Networks (BNs) to help understand the impact of sustainability requirements on the design space and engineering requirements [6]. BNs are well-suited for handling uncertainty and complex interdependencies between variables, making them particularly valuable in addressing complex problems with intricate interdependencies. These two characteristics can address and extend the MAVT approach by using value function data in conjunction with the rest of the system model, which generates a more comprehensive causal model for designers to interrogate.

Sustainability metrics are incorporated in the test case to study their impact on the design space, accounting for the engineering requirements. This is demonstrated with the



Academic Editors: Spiros Pantelakis,
Andreas Strohmayer and Nikolaos
Michailidis

Published: 13 March 2025

Citation: Spinelli, A.; Kipouros, T.
Use of Bayesian Networks to
Understand Sustainability
Requirements. *Eng. Proc.* **2025**, *90*, 32.
[https://doi.org/10.3390/
engproc2025090032](https://doi.org/10.3390/engproc2025090032)

Copyright: © 2025 by the authors.
Licensee MDPI, Basel, Switzerland.
This article is an open access article
distributed under the terms and
conditions of the Creative Commons
Attribution (CC BY) license
([https://creativecommons.org/
licenses/by/4.0/](https://creativecommons.org/licenses/by/4.0/)).

redesign of a NASA CRM wing, where the aspect ratio and wing structural thickness are changed. The method is data-driven, leveraging results from the design model, and processed to train the BN with the causal links between the design parameters, performance indicators, and requirements.

2. Materials and Methods

2.1. Bayesian Networks for Design Tasks

A Bayesian Network is a graph model that describes the correlation dependencies between random variables [7]. These have often been used to model causal relationships between variables and to build reasoning systems robust to uncertainties.

Engineers adopt computational models for simulating their designs and making decisions based on the results. These simulation models effectively embed the assumptions and the mapping between the design parameters and the quantities of interest. Through sampling, it is possible to extract this information and train a suitable model that captures the relationships between the parameters in a black-box fashion.

Bayesian Networks (BNs) are considered suitable for embedding the information that designers need in the conceptual phase, that is, mapping requirements onto the design space, handling requirement changes, and evaluating what-if scenarios for design selection [6]. Furthermore, it is possible to structure the network to contain variables from different disciplines and different levels of complexity (system-of-system level, system level, component level).

Figure 1 presents the steps for training a BN. Training begins after the user defines the variables at play and the connections between them. Structure training from data is still a field being explored and has so far been unable to reliably recover the cause-and-effect connections between variables.

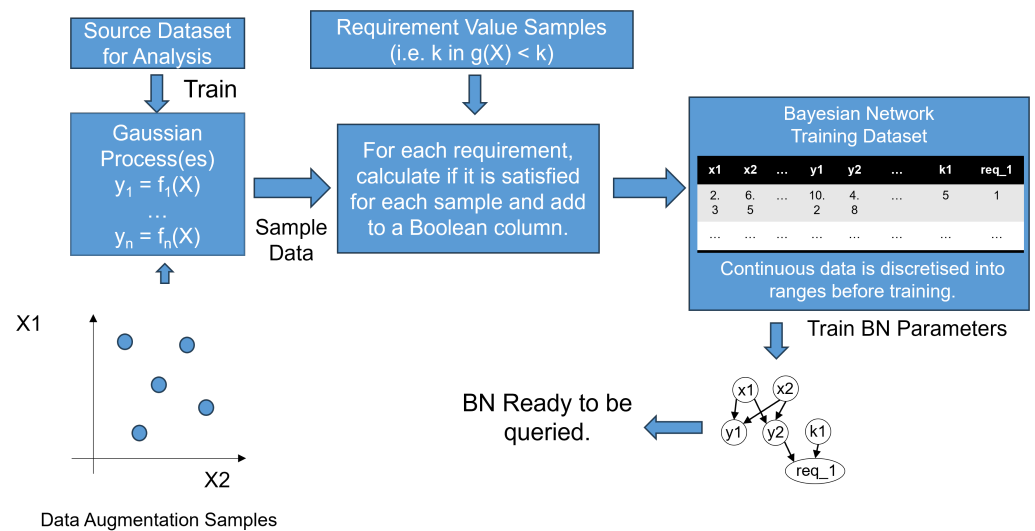


Figure 1. Bayesian Network training procedure.

The data are extracted from the design model and augmented using a set of Gaussian process interpolating functions. The uncertainty in the requirement is modeled using a uniform distribution, with a variance around the deterministic value.

The trained network of the test case is presented in Figure 2. The colors highlight the disciplines of each variable. The four sustainability pillars (performance, cost, society, environment) were linked to the other variables through expert judgment.

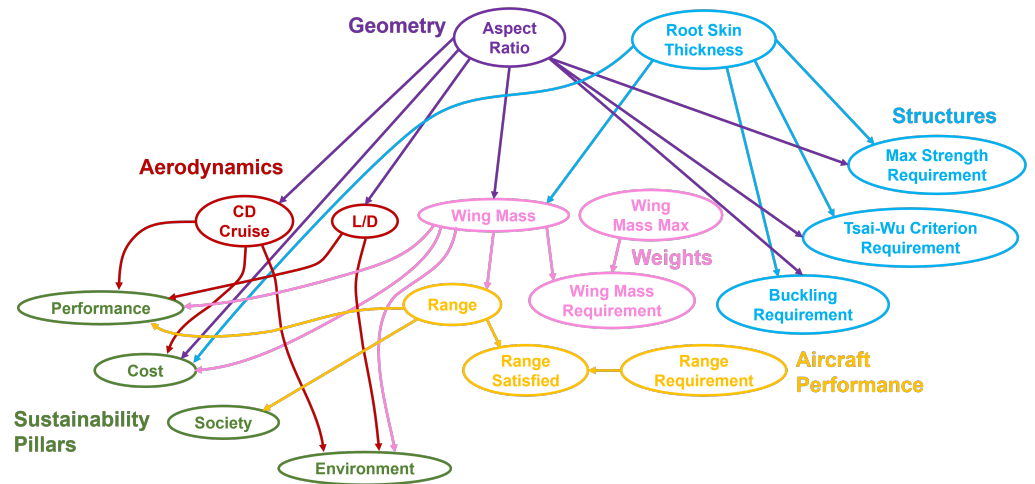


Figure 2. Bayesian Network of the design problem featuring the sustainability pillars.

2.2. Sustainability Criteria

Following the approach suggested by Filippatos [5,8], four sustainability criteria were incorporated and linked to the system parameters. These aim to incorporate societal considerations within the system design, besides the usual performance, cost, and environmental criteria.

The sustainability pillars were evaluated using a function that mapped the affected quantities of interest to a score between 1 and 5. The variables affected the quantities through a linear correlation, positive or negative according to experts. Table 1 shows the connections and the signs (positive or negative) of the correlations between the six input variables (two input parameters and four quantities of interest) and the four sustainability pillars.

The performance criterion encompassed qualities that improve the fitness of the design, such as better range or lower weight. The cost criterion relates to the complexity of manufacturing (high aspect ratio), higher use of materials (high wing mass or skin thickness), and increased operating costs (high cruise drag). The society pillar reflects the positive influence a higher-range aircraft would have on the economy by increasing the number of direct connections across the globe. Finally, the environment pillar is linked to variables affecting fuel consumption and emissions (drag and mass).

The contribution of each parameter is calculated using Equation (1), where x is any of the variables listed in Table 1. Each variable is normalized between 0 and 1 based on the minimum and maximum values in the Bayesian Network training dataset.

$$k_x = \frac{x - x_{min}}{x_{max} - x_{min}} \tag{1}$$

Each sustainability score is then calculated by averaging the contributions and multiplying by 5 (2).

$$Performance = 5 \cdot mean(k_{L/D}, 1 - k_{C_{D,cruise}}, 1 - k_{wing\ mass}, k_{range}) \tag{2a}$$

$$Cost = 5 \cdot mean(k_{AR}, k_{Skinthickness}, k_{C_{D,cruise}}, k_{wing\ mass}) \tag{2b}$$

$$Society = 5 \cdot k_{range} \tag{2c}$$

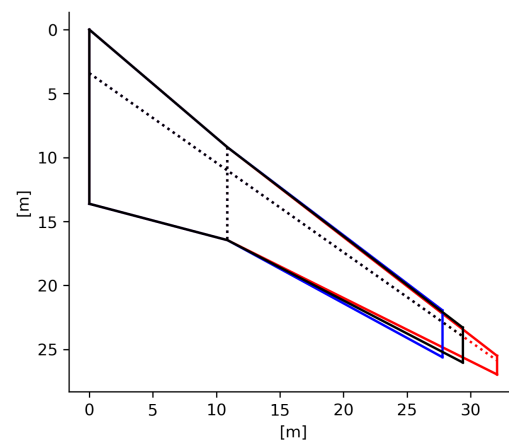
$$Environment = 5 \cdot mean(k_{L/D}, 1 - k_{C_{D,cruise}}, 1 - k_{wing\ mass}) \tag{2d}$$

Table 1. Connectivity table of the sustainability criteria.

	Performance	Cost	Society	Environment
Aspect Ratio		+		
Skin Thickness		+		
L/D	+			+
C_D Cruise	−	+		−
Wing Mass	−	+		−
Range	+		+	

2.3. CRM Wing Redesign Example

The test case is a redesign of a CRM wing (Figure 3), where the segment after the crank is changed according to the change in aspect ratio. The distribution of the skin thickness is scaled according to the baseline root skin thickness value. This simplification is adopted as a compromise between the number of input parameters and the optimal structural layout. The bounds considered for the input parameters are shown in Table 2. The input design space was sampled with 100 points using a Latin Hypercube, and it is assumed that the input parameters are uniformly distributed. The augmentation process interpolated the original dataset, generating 1000 additional data points.

**Figure 3.** Baseline CRM, with two modifications highlighted (blue and red).**Table 2.** Input Parameters.

Parameter	Lower Bound	Upper Bound
Wing Aspect Ratio	7	12
Root Skin Thickness [mm]	5	30

The requirements for this design problem are shown in Table 3. These are mapped to the leaf nodes in the BN (Figure 2). Mapping each requirement can be carried out by imposing each corresponding “satisfaction” node to true. The range and wing mass nodes have an additional parent variable that encodes the uncertainty of the requirement. This allows the analysis to account for the variability and changes in the constraints.

Table 3. Requirements.

Structural Safety Wing Mass Budget Aircraft Operating Range Sustainability Pillars	Strength (Tsai–Wu, Max Strength) and Buckling requirements satisfied $M_{wing} \leq M_{wing, baseline} \pm 15\%$ $Range \geq Range_{B777} \pm 5\%$ Improvement over the baseline configuration (Table 4)
---	---

Table 4. Baseline Sustainability Scores (0–5).

Performance	Cost	Society	Environment
2.58	2.01	2.31	2.67

3. Results and Discussion

Figure 4 presents the input design space with the engineering requirements applied. These correspond to the following query in the BN:

$$P(AR, \text{Root Skin Thickness} \mid S_{max}, S_{TW}, S_B, M_{wing}, \text{Range}) \tag{3}$$

where S_{max} is the Max Strength requirement, S_{TW} is the Tsai–Wu Criterion Requirement, S_B is the Buckling requirement, M_{wing} is the maximum wing mass requirement, and Range is the range requirement. All of these are imposed to be true when conditioning the BN model. The result of the query is a probability distribution where it is possible to identify the most promising set of input parameters. Additionally, changing the query conditions allows designers to better understand the sensitivity of the design space to these requirements.

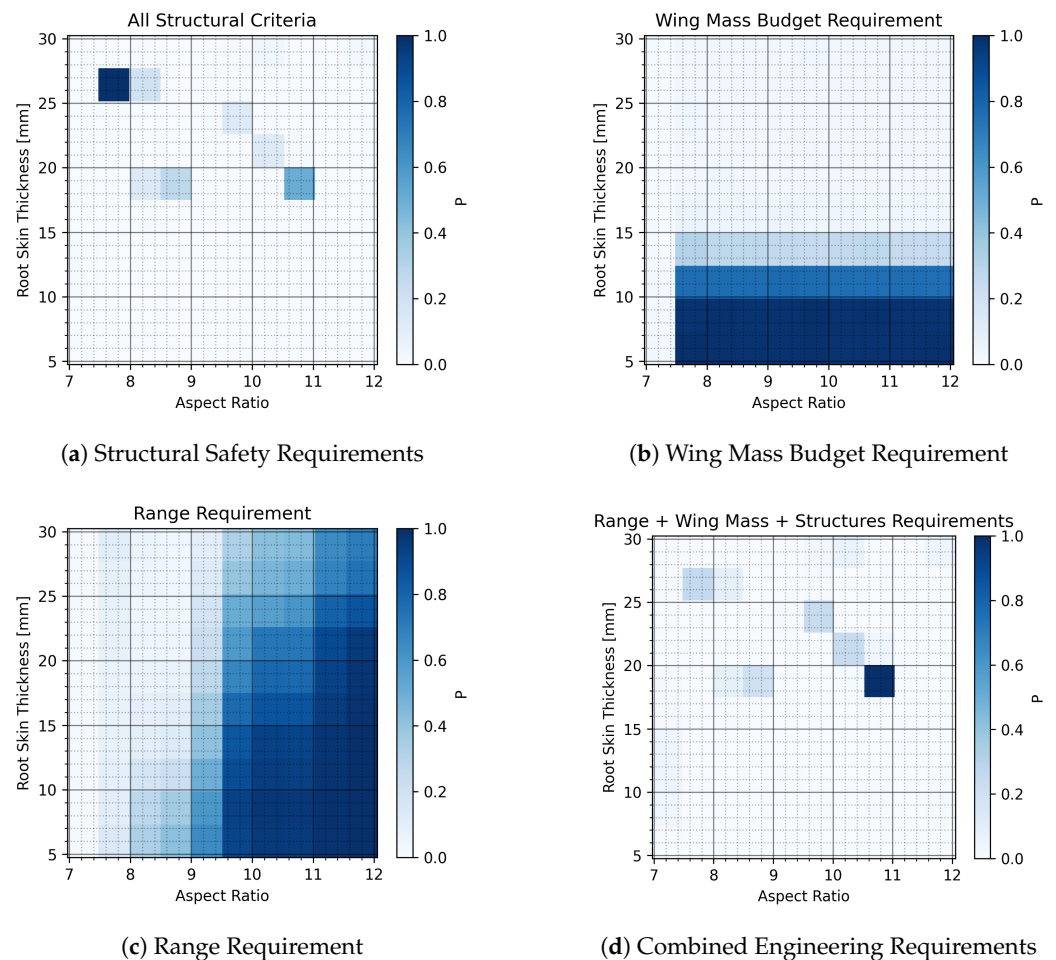


Figure 4. Engineering requirement design space.

For instance, the most restrictive set is the three structural criteria where few pockets of the design space have a high probability of satisfiability (Figure 4a). The addition of the wing mass and the range requirements shifts the probability distribution toward higher aspect ratios and slightly lower skin thicknesses.

This shift reflects how the model incorporates the preferences for each requirement, leading to a trade-off effect.

Figure 5 presents the query of the four sustainability pillars over the design space:

$$P(AR, \text{Root Skin Thickness} \mid \text{Performance, Cost, Society, Environment}) \quad (4)$$

The probability reflects the degree of improvement over the baseline sustainability scores (See Table 4). The combined results suggest that designers should focus on lower root skin thicknesses and higher aspect ratios to improve the overall sustainability of the design.

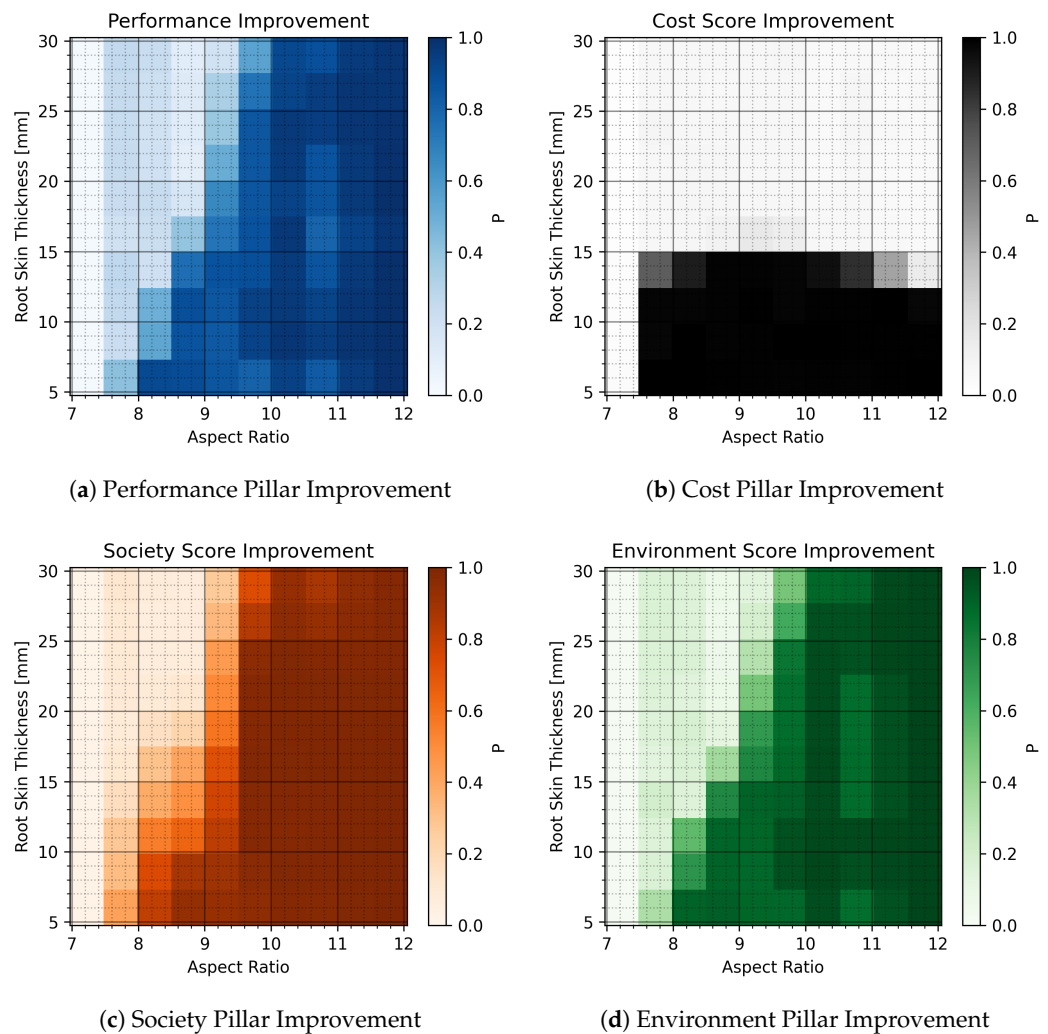


Figure 5. Sustainability requirements design space.

These results contrast with those obtained when considering only the engineering requirements (Figure 4). These results suggest that the engineering requirements may be too restrictive to achieve a more sustainable design.

Figure 6 shows the final designs after applying a 20% probability cutoff. Figure 6b shows the solutions sampled from this design space. The most promising set has an aspect ratio between 10.5 and 11.0 and a root skin thickness close to the original value (between 17.5 and 20.0 mm).

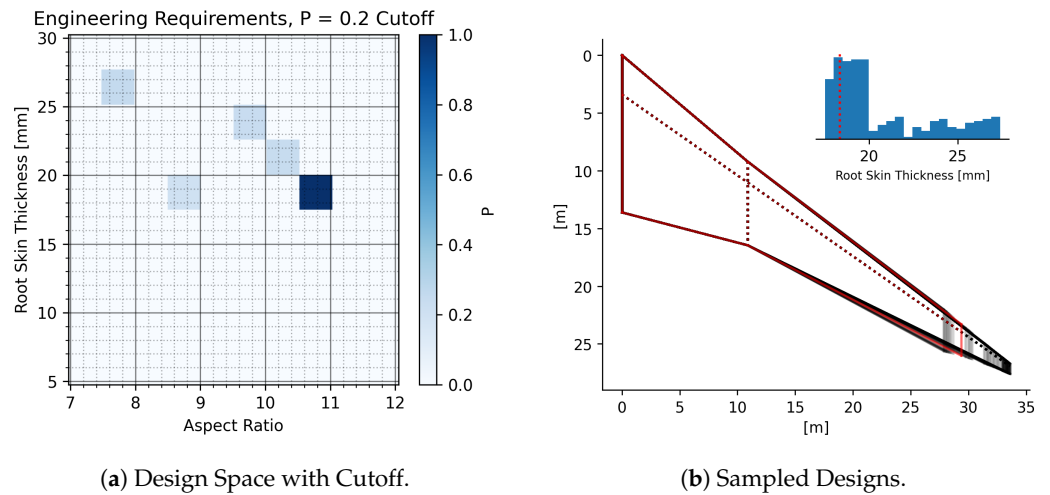


Figure 6. Final solutions with only engineering requirements.

The sustainability requirements are combined with the engineering requirements, producing the final design space in Figure 4. Applying a 25% cutoff leaves only high-aspect-ratio designs as shown in Figure 7. The shift toward lower skin thicknesses was not as effective because the engineering requirements did not permit solutions in the lower quadrants.

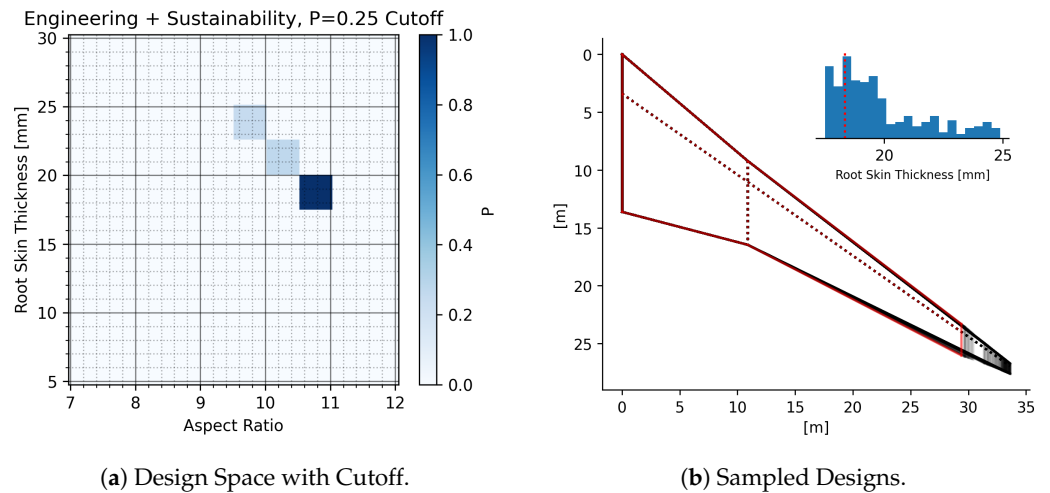


Figure 7. Final solutions with sustainability and engineering requirements combined.

This shift can be interpreted as the system trading off some of the engineering requirements to meet the sustainability demands. The process also eliminated designs with low sustainability scores. Figure 8 compares some quantities that are directly affected by the sustainability scores. The society and performance criteria eliminated designs with low L/D and ranges, while the cost criterion eliminated designs with high wing weights. These results indicate that the system refined the results to an area of the design space that improves sustainability scores while still meeting the engineering requirements.

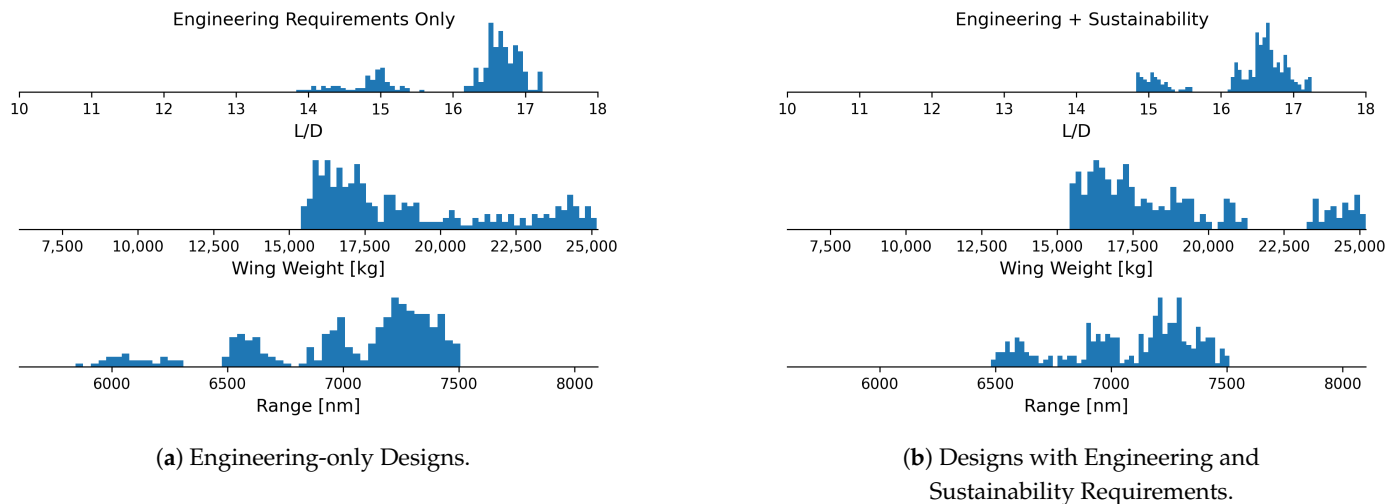


Figure 8. Parameter comparison between the two sampled sets.

4. Conclusions

This study presented Bayesian Networks as a tool for integrating sustainability considerations into the engineering design process. The ability of BNs to model causality and uncertainty makes them well suited for addressing complex systems and for integrating conflicting requirements, such as engineering and sustainability, into the design problem. Furthermore, BNs can easily incorporate imprecise forms of information, such as sustainability requirements.

The test case highlighted how BNs shifted the design space towards the preferences indicated by the sustainability requirements while still incorporating the more restrictive engineering requirements. Overall, this study identified a trade-off between engineering requirements and sustainability.

Future work will quantify the restrictiveness of the engineering and sustainability requirements and analyze how relaxing these requirements affects the design space.

Author Contributions: Conceptualization, A.S. and T.K.; methodology, A.S.; software, A.S.; validation, A.S. and T.K.; formal analysis, A.S.; investigation, A.S. and T.K.; resources, A.S. and T.K.; data curation, A.S.; writing—original draft preparation, A.S.; writing—review and editing, A.S. and T.K.; visualization, A.S.; supervision, T.K.; project administration, T.K.; funding acquisition, T.K. All authors have read and agreed to the published version of the manuscript.

Funding: This research was funded by Aerospace Technology Institute grant number 10003388.

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Not applicable.

Data Availability Statement: Upon request to the authors.

Acknowledgments: The authors thank the members of the ONEHeart project for their help in producing the dataset of this article using their tools, specifically Estela Bragado-Aldana and Yingun Pan.

Conflicts of Interest: The authors declare no conflicts of interest.

References

1. Gagnon, B.; Leduc, R.; Savard, L. From a conventional to a sustainable engineering design process: Different shades of sustainability. *J. Eng. Des.* **2012**, *23*, 49–74. [[CrossRef](#)]
2. Klotz, L.; Weber, E.; Johnson, E.; Shealy, T.; Hernandez, M.; Gordon, B. Beyond rationality in engineering design for sustainability. *Nat. Sustain.* **2018**, *1*, 225–233. [[CrossRef](#)]

3. Calado, E.A.; Leite, M.; Silva, A. Selecting composite materials considering cost and environmental impact in the early phases of aircraft structure design. *J. Clean. Prod.* **2018**, *186*, 113–122. [[CrossRef](#)]
4. Lindfors, A. Assessing sustainability with multi-criteria methods: A methodologically focused literature review. *Environ. Sustain. Indic.* **2021**, *12*, 100149. [[CrossRef](#)]
5. Filippatos, A.; Markatos, D.; Tzortzinis, G.; Abhyankar, K.; Malefaki, S.; Gude, M.; Pantelakis, S. Sustainability-Driven Design of Aircraft Composite Components. *Aerospace* **2024**, *11*, 86. [[CrossRef](#)]
6. Spinelli, A.; Sharma, A.; Kipouros, T. Requirements uncertainty propagation in conceptual design using Bayesian Networks. In Proceedings of the 34th Congress of the International Council of the Aeronautical Sciences, Florence, Italy, 9–13 September 2024.
7. Koller, D.; Friedman, N. *Probabilistic Graphical Models: Principles and Techniques*; MIT Press: Cambridge, MA, USA, 2009.
8. Filippatos, A.; Markatos, D.N.; Theochari, A.; Malefaki, S.; Kalampoukas, T.; Pantelakis, S.G. A proposal towards a step change from Eco-Driven to Sustainability-Driven design of aircraft components. In Proceedings of the 34th Congress of the International Council of the Aeronautical Sciences, Florence, Italy, 9–13 September 2024.

Disclaimer/Publisher’s Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.

Use of Bayesian Networks to understand sustainability requirements

Spinelli, Andrea

2025-03-13

Attribution 4.0 International

Spinelli A, Kipouros T. (2025) Use of Bayesian Networks to understand sustainability requirements. Engineering Proceedings, Volume 90, March 2025, Article number 32. 14th EASN International Conference on “Innovation in Aviation & Space Towards Sustainability Today & Tomorrow”, 8-11 October 2024, Thessaloniki, Greece

<https://doi.org/10.3390/engproc2025090032>

Downloaded from CERES Research Repository, Cranfield University