

Environmental assessment of recycling carbon fiber reinforced composites: current challenges and future opportunities

Arshyn MEIIRBEKOV^a, Akniyet AMANTAYEVA^a, Serik TOKBOLAT^b, Aidar SULEIMEN^a, Shoaib SARFRAZ^c, and Essam SHEHAB^{a,1}

^a*Mechanical and Aerospace Engineering Department, School of Engineering and Digital Sciences, Nazarbayev University, Nur-Sultan, Kazakhstan*

^b*School of Architecture, Design and the Built Environment, Nottingham Trent University, Nottingham NG1 4FQ, UK*

^c*Manufacturing Department, School of Aerospace, Transport and Manufacturing, Cranfield University, Cranfield, Bedfordshire, MK 43 0AL, UK*

Abstract

The increasing application of carbon fiber reinforced polymer composites (CFRP) across different industries raises environmental concerns. It requires focusing on the end-of-life phase of the product/material. The environmental benefits of CFRP recycling over conventional ways of treatment are apparent. However, estimating the environmental impacts is followed up with various challenges. In this study, the aspects of environmental assessment of CFRP recycling and their respective challenges are examined. CFRP recycling methods such as mechanical treatment, pyrolysis, fluidized bed process, and solvolysis have been previously studied in the context of energy and environmental assessment under the Life-Cycle-Assessment (LCA) framework. This study focused on the identification of challenges associated with variability of applied methods used, comparability, scaling results, data, uncertainty, and resource-demanding process of LCA. Recommendations on overcoming the identified challenges are provided and discussed.

Introduction

Carbon Fiber Reinforced Polymers (CFRP) are a commonly used type of material among car and aircraft manufacturers. It contributes

¹Corresponding Author. [essam.shehab@nu.edu.kz.]

to 65% and 20% weight reduction respectively leading to a reduction in terms of fuel demand (Tapper *et al.*, 2020). The range of products made from CFRP is rapidly increasing, thus, increasing the amount of waste to be accumulated in landfill sites unless treated properly. According to Lefeuvre, Garnier, *et al.* (2017), nearly 500 thousand tons of scrap and end-of-life carbon fiber composite waste are projected to be accumulated from the aerospace industry alone by 2050. Polymer matrix composite materials have existed for a long time but there are no effective and global solutions for recycling this type of waste. Both scientists and industries are constantly attempting to improve the existing CFRP waste treatment methods, but not all are functioning at an industrial scale. Although landfilling and incineration are common practices in this context, recycling is becoming a more strategic way due to economic, environmental and legislative considerations (Lefeuvre, Yerro, *et al.*, 2017). At the same time, the production of virgin carbon fiber requires large financial and energy inputs making the recycled carbon fiber more attractive (Gopalraj and Kärki, 2020). However, unlike landfilling and incineration, the environmental impacts or benefits of existing CFRP recycling techniques still need to be quantified (Tapper *et al.*, 2020).

Although recycling is perceived to be environmentally advantageous, it also causes environmental damage through the collection, sorting, transportation and processing of the material (Craighill and Powell, 1996). Therefore, environmental and economic feasibility studies are needed for the evaluation of recycling processes. One of the main impact criteria considered in environmental impact assessment studies is the climate change (kg CO₂ equivalent). However, many other impact indicators make the environmental assessment inaccurate and challenging to apply to different scenarios (Guo and Murphy, 2012; Ylmén *et al.*, 2020). Therefore, this paper summarizes the common life cycle inventories (LCI) in different CFRP recycling techniques.

In the case of CFRP waste, there are few papers on environmental impact assessment with reliable and scalable results. The commonly used LCA method is still in the early stage of application for CFRP materials. This is mainly due to the shortage of data on CFRP recycling processes at an industrial scale. These and other issues hinder the advancement of sustainable recycling strategies, particularly in the

context of understanding the supply chain for CFRP recycling. Therefore, this study aims to review the scientific literature on the environmental impact assessment of CFRP recycling techniques and analyse the related challenges to provide further directions for the assessment design of CFRP recycling processes and sustainable supply chain networks.

Methods

This paper used a narrative literature review method proposed by Mayer (2009). The review considers the recent environmental impact works related to recycling CFRPs. This study focuses on an overview of the intersection of “environmental assessment” and “recycling CFRPs in the context of the current situation and perspectives. The primary databases used are Scopus, Science Direct and Research gate. The publication date of papers included in the study is limited by the last 20 years. Also, only papers written in English with clear references were included in this work. The keywords for the search were “environmental impact”, “environmental assessment”, “LCA”, “Life Cycle Assessment”, “LCI”, “environmental impact categories” combined with “recycling carbon fibers”, “recycling CFRPs”, “recovery of carbon fiber composites”. Finally, all the relevant articles were selected after thoroughly reading the abstracts.

CFRP Waste Recycling Methods

Currently used CFRP waste recycling methods are mechanical, thermal and chemical. While mechanical recycling methods are based on mechanical treatment (shredding, milling and sieving), the most popular and mature thermal recycling method is pyrolysis. Solvolysis with fluid in supercritical conditions (such as water, alcohol, acetone) is a promising chemical recycling method too (Pimenta and Pinho, 2011). In this section, these methods will be discussed to analyse the inputs and outputs of the system that contribute to the damage in the context of environmental assessment.

Mechanical Recycling

Mechanical recycling is the cheapest but the least preferable way of recycling. This method implies waste size reduction to very small

particles (10-50 mm) and using it as a filler material, for example for concrete reinforcement (Ogi *et al.*, 2005). Mechanical cutting, shredding, milling and sieving are done by the rotating equipment. In this process, the higher the output of the machine the less the energy demand per unit of recycled CF, thus, causing less environmental impact. Other than that, these machines can only process small size waste (e.g., 3 mm thickness), therefore, may require additional work such as dismantling and downsizing of composites. These processes might entail additional electrical energy and human health impact, therefore, need to be considered in the Life Cycle Inventory phase.

Pyrolysis

Thermal recycling method such as pyrolysis uses heat to decompose carbon fiber. It is widely adopted at an industrial scale due to its efficiency. The important role in pyrolysis recycling is played by the parameters of the process (temperature, pressure, heating rate etc.). They influence the mechanical properties of reclaimed fibers. This means that depending on the required application process optimization is needed which in turn will affect the energy demand (Meyer *et al.*, 2009). Figure 1 Represents LCI for the pyrolysis process.

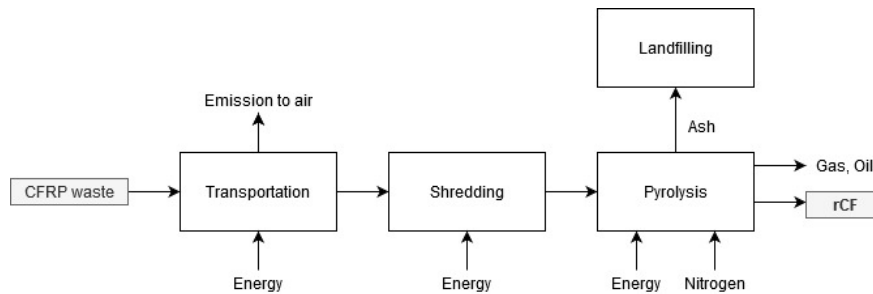


Figure 1. Lifecycle environmental impact of Pyrolysis Process

Fluidized bed process

Fluidized bed process (FBP) is the thermal process that uses silica sand to decompose the composite waste into the fibers and reinforcing material. During the process, a hot stream of air runs through a bed at a temperature >500 °C. After that fibers are discharged by a cyclone from the stream of the gas. The degraded components remain in the bed. The method has its advantages such as tolerance to contaminants

and moderately preserved fiber characteristics, indicating a Technology Readiness Level (TRL) TRL of 6 at Nottingham University (Meng *et al.*, 2020). The schematic representation of LCI of FBP is represented in Figure 2.

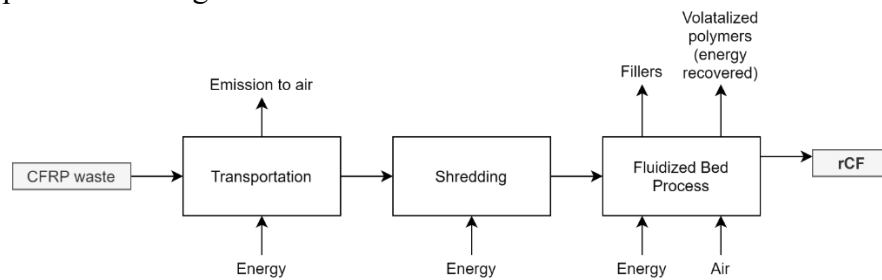


Figure 1. LCI of Fluidized Bed process.

Solvolysis

Chemical recycling process or solvolysis is utilized to decompose polymer matrix with the help of chemical components. Based on the solvent's state the method is subdivided as solvolysis with 1) lower temperatures and 2) supercritical fluids. During the process, the waste is shredded initially to increase the surface of interaction with the chemical and then dissolved using solvents (Figure 3). The range of used chemicals is wide starting from supercritical water and ending with solvents such as ethanol, acetone, and methanol (Krauklis *et al.*, 2021). The method is not still applied at the industry scale, though the results were validated at the laboratory level (Rybicka *et al.*, 2016).

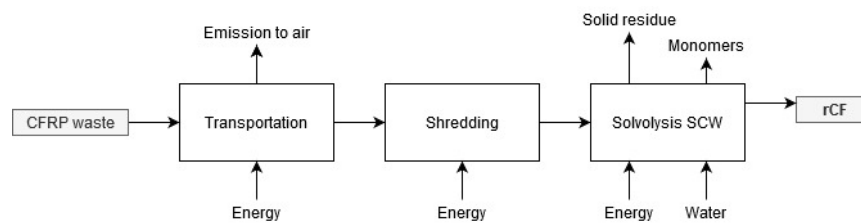


Figure 2. LCI of Solvolysis process

Life Cycle Assessment

LCA is one of the widely applied methods for the environmental assessment of a product. This method is ISO 14000 standardized and is conducted following the established procedures (Petrakli *et al.*,

2020). LCA assessment is performed in several steps. These steps include identifying the aim and defining the system of the LCA, quantifying the input and output flow of the system, evaluating the life cycle impact, and classifying their impact categories to the environment and improving assessment (Craighill and Powell, 1996). Throughout the lifecycle of a product, different process stages require a different number of resources and have varying levels of impact on the environment. As a part of the LCA study, the assessor needs to delineate the system boundaries and scope of the study. After that, inventory analysis is carried out on emissions and waste generated during the process. Then their environmental impact is quantified in terms of ozone depletion, eco- and human toxicity and so on (Petrakli *et al.*, 2020). Depending on the chosen scope, LCA analysis can cover the whole life cycle of a system or only a part of it (da Silva *et al.*, 2021). “Gate to Gate” LCA covers partial LCA which considers only a single process. In our work, Gate to Gate indicated studies are those which covered only the recycling process itself. “Cradle to Grave” is a standard full-cycle LCA which covers all production phases, use, and disposal phase. “Cradle to Cradle” or closed LCA is a type of “Cradle to Grave” LCA, but it also includes the recycling process. This whole lifecycle assessment allows relevant stakeholders to manage the product and drive its production and disposal in a more sustainable way.

Life Cycle Inventory

The lifecycle inventory (LCI) analysis stage is an important and challenging step in the LCA process. It is challenging because it requires appropriate data which usually tends to be limited in the early-stage development of a process or a product. Inventory refers to all direct and indirect environmental impacts of a process such as inputs (raw stock material, energy, etc.) and outputs (emissions, waste, etc.) (Mansor *et al.*, 2019). It is also possible to include social considerations such as health and safety, risks as well as human health impact. Depending on the chosen set of inputs/outputs during the LCI, the accuracy and validity of the LCA results will vary. Moreover, the inventory data (e.g. energy, material, emission etc.) is aggregated to quantify the specific environmental concerns for example, global

warming and resource depletion. There are far more examples of environmental impact categories. However, no standard method or criteria exists for selecting the “right” impact category. The decision is mostly dependent on the studied sector, scope and authors’ judgement (Reyes *et al.*, 2020).

Another important deliberation is the availability of several impact categories to quantify one environmental concern. For example, global warming indicators could be a global warming potential (GWP, kg CO₂ eq.), the climate change impact (kg CO₂ eq.), greenhouse gas emissions (kg CO₂ eq.), CO₂ emission (kg CO₂ eq.) and others. According to general observations, the recycling CFRP sector tends to evaluate GWP as a function of energy required to recycle by one of the aforementioned methods. There are several works published that quantify and compare the energy consumption of CFRP recycling techniques. However, they use different functional units, and experimental setups and make different assumptions. Therefore, the data usually varies from one study to another. The indicative energy consumption by methods is shown in Table 1.

Table 1. Energy Consumption Levels by different CFRP recycling methods

| Recycling Method | Reported Energy consumption (MJ/kg) | References |
|----------------------|-------------------------------------|--------------------------------|
| Mechanical recycling | 2.03 (10 kg/h) | (Howarth <i>et al.</i> , 2014) |
| Pyrolysis | 2.8 | (Song <i>et al.</i> , 2009) |
| | 30 | (Witik <i>et al.</i> , 2013) |
| Solvolysis | 63-91 | (Shibata and Nakagawa, 2014) |
| | 19 | (Keith and Leeke, 2016) |

In addition, sometimes one impact category can be measured with different units which also confuses relevant stakeholders (Tapper *et al.*, 2020). For example, acidification can be expressed as kg SO₂ eq. or m² UES (area of an unprotected ecosystem) or as the number of extinct species per year. The list of commonly used impact categories and their units are presented in Table 2.

Table 2. List of impact categories for LCI analysis of CFRP material.

| Name | Abbreviation | Units | Comment | Source |
|---|--------------|-----------------------------|---|-----------------------------------|
| Global Warming Potential (Climate change) | GWP | kgCO ₂ eq/kg | If the process emits gas, it will have GWP, which compares the energy absorbed by 1 ton of gas over time with the emissions of 1 ton of CO ₂ . | (Vallero, 2019) |
| Greenhouse Gas Emissions | GHG | kgCO ₂ eq/kg | The most widely used environmental impact assessment category. | (Tapper et al., 2020) |
| Cumulative Energy Demand | CED | MJ/kg | The energy required to make the product, process or service. | (Bachmann et al., 2017) |
| Energy Intensity | EI | MJ/kg | Equivalent to cumulative energy demand (CED) corresponding to primary energy. | (Bachmann et al., 2017) |
| Ozone Layer Depletion | OLD | kg CFC-11 eq | The function of the emission of ozone depleting gas. | (Bałdowska-Witos et al., 2021) |
| Human toxicity (cancer causing and non-cancer effect) | HTP | CTUh | The function of the number of toxic releases to humans in water, air and soil media. | (Imbeault-Tétreault et al., 2013) |
| Acidification Potential | AP | Kg SO ₂ - eq | The function of soil acidity due to sulfates, nitrates and phosphates (NO _x , NH ₃ , and SO ₂) in the atmosphere. | (Geisler et al., 2005) |
| Eutrophication Potential | EP | kg N-Eq | Nutrient enrichment of marine ecosystem. | (Thiel et al., 2013) |
| Ecotoxicity (freshwater, marine, terrestrial) | ET | kg O ₃ -Eq | The function of exposure level to released toxic substances to the environment. | (Frischknecht et al., 2005) |
| Resource Depletion (water, natural resources) | RD | m ³ water/oil eq | Depletion of non-renewable natural resources. | (Ciroth et al., 2004) |
| Photochemical oxidation | POCP | kg Sb eq | Also known as summer smog, the air pollution resulted from the reaction of emissions with sunlight. | (Frischknecht et al., 2005) |

According to Craighill and Powell (1996), the environmental impact assessment is three-step process: classification, characterisation and evaluation. First, the data or inventory needs to be classified into the environmental issue (e.g. global warming), the scale of the impact (e.g. local, global), and impact media (e.g. air). Second, characterization refers to quantifying the impact of the inventory to determine environmental issues. Some of the terms to quantify such contributions can be GWP and Ozone Depletion Potential (ODP). Similarly, recycling CF from CFRP entails unique environmental impacts which are summarised in Figure 4. These are the main impact categories that are widely reported in the literature (Bulle *et al.*, 2019).

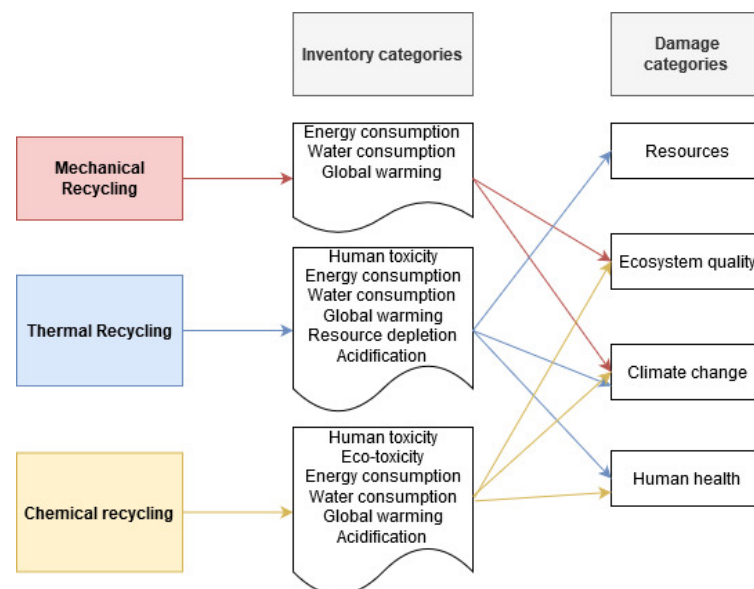


Figure 4. Environmental Inventory and damage categories of CFRP recycling methods.

Although LCA is a very useful tool, users should be aware of its sources of uncertainty which might lead to different outcomes (Ylmén *et al.*, 2020). For example, as was discussed before, some steps of the analysis require personal judgement (determining system boundary, analyzing the recycling process, choosing quantifiable impact categories etc.). This and other challenges in the environmental analysis of CF recycling will be discussed in the next sections.

Environmental Assessment of CFRP recycling: current status

The works related to the environmental assessment of CFRP recycling methods are listed in Table 2. Most of the authors compared different recycling options according to their global warming potential, acidification and ecotoxicity potential. Also, as data plays a crucial role in the LCA analysis, most of the authors used databases of well-known platforms such as Simapro, Ecoinvent and Gabi. The works presented in Table 3 are grouped according to the recycling methods included.

| Reference | Year | Approach Used | Recycling process | Main impact categories | Database | Comments/ Main findings |
|-------------------------|------|-------------------------------|--|-----------------------------|-------------------|---|
| (Pillain et al., 2017) | 2017 | Review of indicators | n/a | GWP, EI, AP, OLD, HTP | n/a | The authors state that the most relevant indicators for the CFRP recycling sector are GWP, human toxicity, and acidification. |
| (Markatos et al., 2021) | 2021 | MCDM | Pyrolysis, FBP, Microwave pyrolysis, Solvolysis, SCW | End-of-Life index | n/a | The authors proposed End-Of-Life Index to support decisions in choosing a recycling process. The index includes the quality, cost, and environmental aspects of recycling methods. |
| (Tapper et al., 2020) | 2020 | Review | n/a | n/a | n/a | The authors proposed an LCA framework for composite recycling applicability review, including all phases. The authors state that the use phase is the greatest potential for CFRP in terms of emissions savings. Authors believe that different LCA databases affect negatively cross comparison between different study outputs. |
| (Bachmann et al., 2017) | 2017 | Review | n/a | n/a | n/a | The authors provided an extensive LCA review of composites use in aviation including biobased fibers, biobased thermoset resins, and recycled CFRPs; Also, LCA studies in pyrolysis usage for CFRP recycling were briefly discussed. |
| (Witik et al., 2011) | 2011 | Manufacture, use, end-of-life | Mechanical | Climate change, HTP, ET, RD | Ecoinvent, IDEMAT | Currently, automotive manufacturers are concerned only about reducing emissions |

| | | | | | | | |
|------------------------|------|----------------------------|-----------------------|---------|-----------------------------|--------------------------|--|
| | | | | | | LCI database, literature | during the useful life and increasing the recovery rate of end-of-life waste. Authors suggest that these two requirements are not enough to decide on an environmentally friendly strategy for transportation. Instead, the whole lifecycle is needed to be considered. |
| (Howarth et al., 2014) | 2014 | Gate-to-gate(End-Of-Life) | Mechanical | EI | Experiment | | The energy demand for mechanical recycling was estimated: the energy intensity for the milling process was defined to be between 0.27-2.03 MJ/kg |
| (Li et al., 2016) | 2016 | Gate to gate (End-of_life) | Mechanical | GWP, EI | Ecoinvent | | The environmental impacts of landfilling, incineration and mechanical recycling were assessed. Mechanically recycled CFRP may offer great GHG reductions if used instead of virgin glass fiber (-378 CO ₂ eq./t.), though the costs of recycling are an obstacle to prompting the method to a larger scale. |
| (Akbar and Liew, 2020) | 2020 | Gate-to-gate(End-Of-Life) | Mechanical | GWP, EI | Simpro 9.0.0 | | The authors provided environmental considerations of rCF coprocessing in cement kilns, which showed a positive trend. 1% of added rCF replacing 10% of cement with silica fume allowed to reduce GWP impact by 14%. |
| (Meng et al., 2017) | 2017 | Gate-to-gate | Fluidized bed process | GWP, EI | Gabi, Ecoinvent, Experiment | | The authors evaluated the lifecycle environmental impact of FBP recycling followed by manufacturing from rCF using the wet papermaking process. Results demonstrate that rCF energy demand and GHG emissions can be reduced by 32-50% and 33-51% respectively |

| | | | | | | | |
|---------------------------------|------|---|----------------------------------|--|--|--|---|
| (Meng <i>et al.</i> , 2020) | 2020 | Gate-to-Gate | Fluidized bed process | | GWP, EI | Gabi, Ecoinvent, GREET | The work assesses the environmental impact of rCF utilization for aviation applications using the FBP recycling. The phases start with a collection of rCF, manufacturing components, and use phase. The environmental impact reductions are between 4 and 31% compared to virgin glass fiber productions |
| (Khalil, 2018) | 2018 | Gate-to-Gate (end-of-life) | Pyrolysis vs Solvolysis SCW | | AP, ET, EP, GWP, HTP (non-carcinogenics, carcinogenics), ODP, smog | Gabi | ODP is the most responsive impact category to variations in the energy inputs of grinding. The ET is the least sensitive category to variations in the grinding energy. |
| (Dauguet <i>et al.</i> , 2015) | 2015 | Gate-to-Gate (end-of-life) | Solvolysis (supercritical Fluid) | | GWP, RD, HTP, OLD, AP, ET | Ecoinvent 3.0 | The realignment and the cleaning rCF have a small environmental impact, and supercritical water solvolysis and remanufacturing have a substantial impact. Electricity and natural gas account for more than 33% of the impact. |
| (Prinçaud <i>et al.</i> , 2014) | 2014 | Cradle-cradle (without Use phase) | Solvolysis SCW | | | Experimental data. Simapro, Ecoinvent, recipe Mid-point (H) method | Using recovered carbon reinforcement by aqueous solvolysis results in an 80% gain for all impact categories compared to land-filling. |
| (La Rosa <i>et al.</i> , 2016) | 2016 | Production and recycling of the (CF) (gate-to-gate) | Chemical treatment | | CED, AP, HTP, POCP, GWP, OLD, ET, | Simapro 8.01, Ecoinvent v3, laboratory data | Recycling is environmentally beneficial because recovered fibers could be used instead of virgin fibers for different applications. The avoided energy consumption for vCF production is the main influencing positive factor in the environmental assessment of |

| | | | | | | |
|------------------------------|-------------------------------|---|----------------------------------|---------------|---|---|
| | | | | | | chemical treatment for CFRP. Laboratory data were used in the study, but plant data is planned to be integrated into the LCA study. |
| (He et al., 2021) | Cradle-to-gate and use phase | Pyrolysis | Primary Energy Demand (PED), GWP | | Gabi, GREET model and literature studies | The environmental benefits vary from country to country and for different fiber mass content in recycled carbon fiber. 13% and 34% decrease in GWP can be achieved with a 40% recovery rate in cradle-to-gate and use phases respectively. In Europe, the positive effect on GWP is larger than in the United States. |
| (Witik et al., 2013) | End-of-life recycling | Pyrolysis | RD, HTP, ET | GWP, | Simapro | This study is one of the pioneers in LCA analysis for recycling CFRPs. Results indicated that when rCF is used instead of virgin CF, the recycling via pyrolysis has less impact by 78, 84, and 82 % on climate change, resource, and ecosystem quality compared to landfilling. |
| (Lee et al., 2010) | Gate-To-Gate (End-Of-Life) | Acid, pyrolysis in oxygen and nitrogen, organic solvents, supercritical process | Energy Print, Footprint | Footprint GHG | Simapro 7.0.0. And Ecoinvent | The overall footprint (Energy +GHG) is 5 times larger for pyrolysis compared to acids. The overall potential of recycling with acid was shown by the authors. |
| (Shuaib and Mativenga, 2017) | Gate-to-gate (Only recycling) | Mechanical, High Voltage Fragmentation (HVF), Solvolysis | Energy print | foot- | Ecoinvent 3, European Life Cycle Database | Experiment and LCA were conducted by the authors. HVF has the highest Energy Demand (60 MJ per kg) in comparison with chemical (12.3 MJ/kg) and mechanical (0.37 MJ/kg) |

| | | | | | |
|---------------------------------|---|---|---------------------|------------------------------|--|
| (Meng <i>et al.</i> , 2018) | Gate-to-gate | Mechanical, pyrolysis, fluidized bed, and chemical recycling process) | GWP, EI | Gabi and Ecoinvent | Four recycling methods were compared to landfilling option in terms of environmental impact. According to the authors, all recycling methods propose GWP reductions from -19 to -27 CO ₂ eq and energy reductions from 395 to 520 MJ per 1 kg. The study notes that the net PED and GHG impact categories are more affected by replacing vCF, which are 10-20 times more effective than the recycling process itself. |
| (Vo Dong <i>et al.</i> , 2018) | Gate-to-Gate (end-of-life recycling) | Mechanical, Pyrolysis, Microwave, Supercritical water | GWP | Ecoinvent v 2.2 | The authors considered the difference of GWP impact between substituted virgin fiber and process impact. All recycling methods have beneficial GWP impacts from recycling, though grinding showed only minor improvements. |
| (Ghosh <i>et al.</i> , 2021) | Gate-to-gate (recycling content approach) | Pyrolysis (assumed) | GHG, EI | Ecoinvent, GREET, | The main focus on the analysis of the production of subframes from recycled CFs. According to the authors, CFRP subframe may reduce GHG emissions in combination with increasing lifecycle distance compared to the conventional subframe |
| (Petrakli <i>et al.</i> , 2020) | Cradle to cradle | Landfilling, Incineration, Pyrolysis | GWP, OLD, HTP, etc. | Ecoinvent, Experimental data | LCA analysis was conducted with the experiment of prototypes such as sailing boats and handbrake levers. According to the authors, pyrolysis allows up to 40% impact savings because of recovered material. |

From Table 3, it is clear that numerous research attempts have been made to discover the environmental impacts of recycling CFRPs. Most studies rely on LCA/LCI databases and follow similar procedures. However, the studies tend to be different in terms of considered recycling methods, lifecycle phases included in the investigation, assessed impact indicators, and databases used. Also, the studies mainly considered energy impact and GWP in terms of assessed impact categories. The research interest in determining the environmental aspects of recycling CFRPs is robust and notable work has already been done in this field. All the recycling methods mentioned in this study were examined to some extent to see if the positive environmental implications compared to traditional disposal ways are observed. Despite numerous research efforts that have been highlighted in this review, there are still other challenges associated with the effective and accurate estimation of environmental impacts of recycling CFRPs. These challenges are tightly tied with the research gaps which were formulated based on the conducted literature review. The following subsections provide information on challenges related to this field.

a. Variability of methodologies

Although ISO 14044 documentation stipulates specific standards for the LCA assessment, there is still a great variability within an inventory (LCI) and impact analysis (LCIA) (Kousemaker *et al.*, 2021). First, the modelling approach may vary as some modellers can use the attributional LCA method. In attributional LCA the functional units or phases of the product are attributed according to average retrospective data within a specific period. Conversely, consequential LCA is conducted to determine the change in the environment due to the effects of inputs and outputs of the product (Kousemaker *et al.*, 2021).

Overall, LCA methodologies have evolved significantly in the last 30 years and have different classification and characterization methods. For instance, the midpoint level indicators might vary from method to method. Some of the methodologies might include completely different indicators compared to the others. (Bekker *et al.*, 2016).

b. Comparability - functional and system boundaries, oversimplification

It is critical to determine the functional and system boundaries in the assessment as it directly influences the final interpretation of the assessment results. Ambiguous or unclear definitions of the functions and processes in the recycling chain (not mentioning the usage of accompanied products during the recycling process and other similar omissions) may result in an inaccurate estimation of the final impact. It may seem that comparing recycling methods in terms of an environmental impact is sufficient to examine only the primary processes, however, it may jeopardize the purpose of the environmental assessment (Hetherington *et al.*, 2014). The recycling processes differ in terms of functions (some of them are multifunctional), and the by-products they produce. It is a challenging task to split the environmental impact within multifunctional recycling methods (Heidrich and Tiwary, 2013). For instance, the fluidized bed and pyrolysis process results in byproducts that can be transformed into energy, whereas mechanical recycling does not recover energy (Pickering, 2006).

The mentioned challenges in terms of comparability methods are accompanied by the challenge related to the LCA methodology itself. For example, an oversimplification, during which the model limitations and simplifications result in significant influence on the outputs (da Silva *et al.*, 2021). The oversimplification challenge is highly tied to small companies which struggle to implement the LCAs due to the lack of amplitude (Heidrich and Tiwary, 2013).

c. Scaling the results

Not all recycling processes have reached the readiness level to be exploited at an industrial scale. Only pyrolysis and mechanical grinding for recycling CFRPs have shown Technology Readiness Levels (TRLs) of 8 and 6.5 respectively. Whereas solvolysis and fluidized bed processes are still at the validation phase in the laboratory environment (Rybicka *et al.*, 2016). This indicates that these methods do not consider the complexity of the industrial scale equipment, management, and additional investment (Hetherington *et al.*, 2014).

Hence, scaling the results by using common practices or just by normalization may not result in accurate results for processes that are still at the laboratory scale.

d. Data related challenges

Data for LCI/LCA approach is systematically summarized and publicly available in Ecoinvent and Simapro for various materials and processes (Ecoinvent, 2021; Simapro, 2021). However, those databases do not contain specific information for processes related to composite manufacturing, recycling and disposal. For instance, Vo Dong *et al.* (2018) extract data for a landfilling process from Simapro v7.3 and Ecoinvent 2.2 for mixed polymer plastics instead of composites, as there is no specific data on the environmental effects of composites landfilling. Other parameters of a model for LCI in the studies are also accompanied by the great extent of impreciseness, e.g., energy consumption levels of recycling processes. In the analysis done by Witik *et al.* (2013), the authors examined the product manufacturing phase which is assumed to be using 162 MJ for electricity and 191 MJ of heat from gas. On the other hand, the manufacturing of virgin carbon fibers varies between 183 to 286 MJ per kg (Giorgini *et al.*, 2020). This all demonstrate that the data used in models are not accurate with uncertainty factors embedded in input parameters. Thus, missing datasets for specific processes is a challenge to some extent that has to be overcome by conducting experiments and investing time (Hetherington *et al.*, 2014). In addition, other circumstances negatively affect the reliability of data such as the quality of data in terms of the geographical source, consistency, the compatibility of data from different sources, reasonable assumptions and reproducibility (Heidrich and Tiwary, 2013).

e. Uncertainty

Any LCA study will have results affected by a degree of uncertainty. During the assessment, all the factors will influence the accuracy of results, for example how model data is arranged and which scope is selected (Heinzle *et al.*, 1998). In fact, most of the studies considered in this work agree with the uncertainty of the LCA method

to a certain degree. The difference in methodologies, the discrepancy between lab test results vs implementation of an industrial project, and data quality in combination create a snowball effect. This causes the level of uncertainty of a study to be too high to be used for decision making. Given that the LCA analysis for new emerging recycling methods is conducted for further decision making, determining and leveraging the uncertainty of conducted studies is essential (Hetherington *et al.*, 2014). Figure 5 demonstrates the level of uncertainty and technology readiness level relationship. Composites recycling technologies (CRT) on the technology readiness (TRL) scale is adapted from Rybicka *et al.*, 2016. The more data is available to conduct LCA, the more accurate results will be obtained during the assessment.

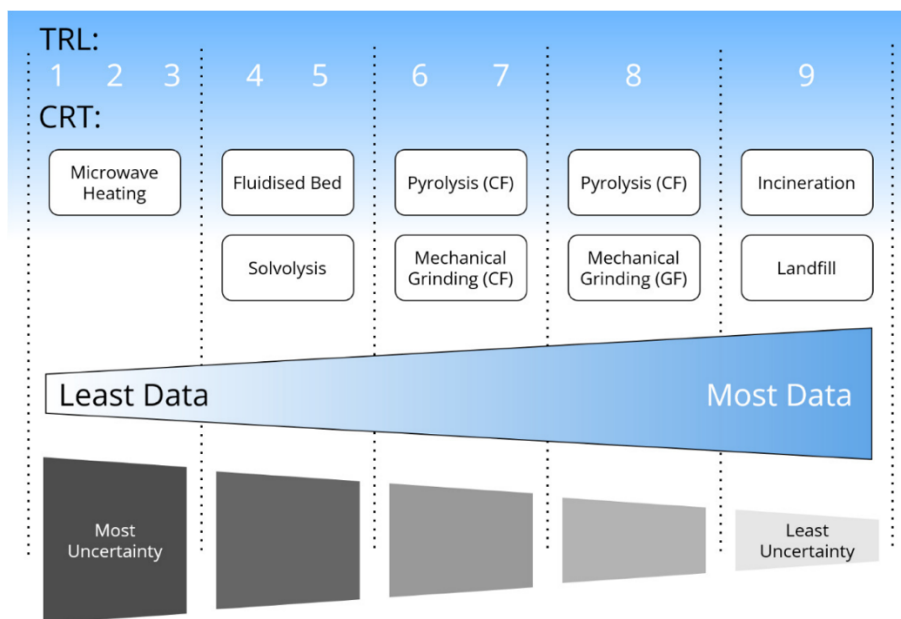


Figure 5. Uncertainty level representation with respect to TRL of the CFC recycling process

f. Resource demanding assessment.

Although there is no minimum threshold for assessing product sustainability (Heidrich and Tiwary, 2013), the LCA methodology allows approximating the environmental impact of supply chain operations by analyzing the data. However, environmental assessment is a time and resource-consuming activity for the industry. It requires expertise, knowledge and financial support as well as adequate environmental data to conduct an LCA study (Heidrich and Tiwary, 2013). Moreover, the information and data need to be updated accordingly, especially for products with a long lifecycle due to economic and environmental conditions changing over time (Kousemaker *et al.*, 2021).

Conclusions and future directions

The processes for recycling CFRPs such as mechanical recycling, pyrolysis, fluidized bed process, and solvolysis result in different qualities of recovered fibers and vary in terms of costs and environmental impacts. This work provided a brief overview of studies that covered the theme of environmental assessment aspects of recycling CFRPs. At present, this field has several studies that mainly investigated CFRP recycling in the context of LCA frameworks. Several works were published assessing the environmental challenges including different lifecycle phases for different methods. This study has identified the main challenges such as the variability of methodologies, comparability, scaling results, data, and uncertainty, resource demands. The further developments in the environmental assessment of CFRP recycling can be fulfilled through the following future directions:

- A combined methodology should be used with a preliminary agreement with the studies considered in this research. Standardization of the LCA framework for CFRPs within the industries (automotive, and aerospace) will help to unite and compare statements from different authors.

- Promoting data availability for CFRP in current databases could be a critical action to bring potential benefits to various stakeholders instantly. However, no accurate data on CFRP manufacturing and recycling is present in databases. The quality of data and availability are the key factors which define the reliability of results. Therefore, it is highly recommended to improve current databases with specific composite materials data.
- LCA studies convey a lot more information as they include the use phase. Some industries benefit from weight savings (for instance, in the automotive industry), therefore consume less fuel in the use phase..
- The collaboration between researchers and recycling industry-related stakeholders will increase the reliability of conducted studies. Because simply scaling the laboratory output does not provide reliable data. The LCA studies conducted within the laboratories using existing databases could be integrated into plant-level studies to demonstrate real-time cases.

Design informed thinking should be promoted. The LCA proves that the positive environmental effects during the production and use phases could be achieved if the design of a product is known beforehand. Though composite material components are usually produced with specific shapes and parameters, it is always possible to incorporate into the design features. This would further allow reuse/remanufacturing of the component in less demanding applications. The opportunities for secondary applications of recycled CFRP shall be rigorously researched to reduce landfilling impacts and avoid an intensive increase in manufacturing rates of virgin CFRPs. This statement is especially critical that the effect of replacing virgin carbon fiber has the dominating positive environmental effect due to avoided energy consumption.

Acknowledgements

The authors want to express their sincere gratitude to Nazarbayev University for funding this work under the Faculty Development Competitive Research Grant Program (FDCRGP), Grant No. 110119FD4524.

References

- Akbar, A. and Liew, K.M. (2020) 'Assessing recycling potential of carbon fiber reinforced plastic waste in production of eco-efficient cement-based materials', *Journal of Cleaner Production*, 274, p. 123001. doi:10.1016/j.jclepro.2020.123001.
- Bachmann, J., Hidalgo, C. and Bricout, S. (2017) 'Environmental analysis of innovative sustainable composites with potential use in aviation sector—A life cycle assessment review', *Science China Technological Sciences*, 60(9), pp. 1301–1317. doi:10.1007/s11431-016-9094-y.
- Baldowska-Witos, P., Piasecka, I., Flizikowski, J., Tomporowski, A., Idzikowski, A. and Zawada, M. (2021) 'Life Cycle Assessment of Two Alternative Plastics for Bottle Production', *Materials*, 14(16), p. 4552. doi:10.3390/ma14164552.
- Bekker, A.C.M., Verlinden, J.C. and Galimberti, G. (2016) 'Challenges in assessing the sustainability of wire + arc additive manufacturing for large structures', in *27th Annual International Solid Freeform Fabrication 2016: An Additive Manufacturing Conference*, pp. 406–416.
- Bulle, C. *et al.* (2019) 'IMPACT World+: a globally regionalized life cycle impact assessment method', *The International Journal of Life Cycle Assessment*, 24(9), pp. 1653–1674. doi:10.1007/s11367-019-01583-0.
- Ciroth, A., Fleischer, G. and Steinbach, J. (2004) 'Uncertainty calculation in life cycle assessments', *The International Journal of Life Cycle Assessment*, 9(4), p. 216. doi:10.1007/BF02978597.
- Craighill, A.L. and Powell, J.C. (1996) 'Lifecycle assessment and economic evaluation of recycling: A case study', *Resources, Conservation and Recycling*, 17(2), pp. 75–96. doi:10.1016/0921-3449(96)01105-6.
- Dauguet, M., Mantaux, O., Perry, N. and Zhao, Y.F. (2015) 'Recycling of CFRP for High Value Applications: Effect of Sizing Removal and Environmental Analysis of the SuperCritical Fluid Solvolysis', *Procedia CIRP*, 29, pp. 734–739. doi:10.1016/j.procir.2015.02.064.
- Ecoinvent (2021) *Ecoinvent*. Available at: ecoinvent.org.
- Frischknecht, R. *et al.* (2005) 'The ecoinvent Database: Overview and Methodological Framework (7 pp)', *The International Journal of Life Cycle Assessment*, 10(1), pp. 3–9. doi:10.1065/lca2004.10.181.1.
- Geisler, G., Hellweg, S. and Hungerbühler, K. (2005) 'Uncertainty Analysis in Life Cycle Assessment (LCA): Case Study on Plant-Protection Products and Implications for Decision Making (9 pp + 3 pp)', *The International Journal of Life Cycle Assessment*, 10(3), pp. 184–192. doi:10.1065/lca2004.09.178.
- Ghosh, T., Chul, H., Kleine, R. De, Wallington, T.J. and Bakshi, B.R. (2021) 'Life cycle energy and greenhouse gas emissions implications of using carbon fiber reinforced polymers in automotive components: Front subframe case study', *Sustainable Materials and Technologies*, 28, p. e00263. doi:10.1016/j.susmat.2021.e00263.
- Giorgini, L., Benelli, T., Brancolini, G. and Mazzocchetti, L. (2020) 'Recycling of carbon fiber reinforced composite waste to close their life cycle in a cradle-to-cradle approach', *Current Opinion in Green and Sustainable Chemistry*, 26, p. 100368. doi:10.1016/j.cogsc.2020.100368.
- Gopalraj, S.K. and Kärki, T. (2020) 'A review on the recycling of waste carbon fibre/glass fibre-reinforced composites: fibre recovery, properties and life-cycle analysis', *SN Applied Sciences*, 2(433). doi:10.1007/s42452-020-2195-4.
- Guo, M. and Murphy, R.J. (2012) 'LCA data quality: Sensitivity and uncertainty analysis', *Science of The Total Environment*, 435–436, pp. 230–243. doi:10.1016/j.scitotenv.2012.07.006.

- He, D., Soo, V.K., Kim, H.C. and Doolan, M. (2021) 'Life Cycle Primary Energy Demand and Greenhouse Gas Emission benefits of vehicle lightweighting with recycled carbon fibre', *Procedia CIRP*, 98, pp. 43–48. doi:10.1016/j.procir.2021.01.003.
- Heidrich, O. and Tiwary, A. (2013) 'Environmental appraisal of green production systems: Challenges faced by small companies using life cycle assessment', *International Journal of Production Research*, 51(19), pp. 5884–5896. doi:10.1080/00207543.2013.807372.
- Heinzele, E., Weirich, D., Brogli, F., Hoffmann, V., Koller, G., Verduyn, M. and Hungerbühler, K. (1998) 'Ecological and economic objective functions for screening in integrated development of fine chemical processes. 1. Flexible and expandable framework using indices.', *Ind Eng Chem Res*, 37, pp. 3395–3407.
- Hetherington, A.C., Borrión, A.L., Griffiths, O.G. and McManus, M.C. (2014) 'Use of LCA as a development tool within early research: Challenges and issues across different sectors', *International Journal of Life Cycle Assessment*, 19(1), pp. 130–143. doi:10.1007/s11367-013-0627-8.
- Howarth, J., Mareddy, S.S.R. and Mativenga, P.T. (2014) 'Energy intensity and environmental analysis of mechanical recycling of carbon fibre composite', *Journal of Cleaner Production*, 81, pp. 46–50. doi:10.1016/j.jclepro.2014.06.023.
- Imbeault-Tétrault, H., Jolliet, O., Deschênes, L. and Rosenbaum, R.K. (2013) 'Analytical Propagation of Uncertainty in Life Cycle Assessment Using Matrix Formulation', *Journal of Industrial Ecology*, 17(4), pp. 485–492. doi:10.1111/jiec.12001.
- Keith, M.J. and Leeke, G.A. (2016) 'OPTIMISATION OF SOLVOLYSIS FOR RECYCLING CARBON FIBRE REINFORCED COMPOSITES', in *ECCM17 - 17th European Conference on Composite Materials*, pp. 26–30.
- Khalil, Y.F. (2018) 'Comparative environmental and human health evaluations of thermolysis and solvolysis recycling technologies of carbon fiber reinforced polymer waste', *Waste Management*, 76, pp. 767–778. doi:10.1016/j.wasman.2018.03.026.
- Kousemaker, T.M., Jonker, G.H. and Vakis, A.I. (2021) 'Lca practices of plastics and their recycling: A critical review', *Applied Sciences (Switzerland)*, 11(8), pp. 1–17. doi:10.3390/app11083305.
- Krauklis, A.E., Karl, C.W., Gagani, A.I. and Jørgensen, J.K. (2021) 'Composite material recycling technology—state-of-the-art and sustainable development for the 2020s', *Journal of Composites Science*, 5(28). doi:10.3390/jcs5010028.
- Lee, C.K., Kim, Y.K., Pruittichaiwiboon, P., Kim, J.S., Lee, K.M. and Ju, C.S. (2010) 'Assessing environmentally friendly recycling methods for composite bodies of railway rolling stock using life-cycle analysis', *Transportation Research Part D: Transport and Environment*, 15(4), pp. 197–203. doi:10.1016/j.trd.2010.02.001.
- Lefeuve, A., Garnier, S., Jacquemin, L., Pillain, B. and Sonnemann, G. (2017) 'Anticipating in-use stocks of carbon fiber reinforced polymers and related waste flows generated by the commercial aeronautical sector until 2050', *Resources, Conservation and Recycling*, 125, pp. 264–272. doi:10.1016/j.resconrec.2017.06.023.
- Lefeuve, A., Yerro, X., Jean-Marie, A., Vo Dong, P.A. and Azzaro-Pantel, C. (2017) 'Modelling pyrolysis process for CFRP recycling in a closed-loop supply chain approach', in *27th European Symposium on Computer Aided Process Engineering*. Barcelona, pp. 2029–2034. doi:10.1016/B978-0-444-63965-3.50340-8.
- Li, X., Bai, R. and Mckechne, J. (2016) 'Environmental and financial performance of mechanical recycling of carbon fibre reinforced polymers and comparison with conventional disposal routes', *Journal of Cleaner Production*, 127(2016), pp. 451–460. doi:10.1016/j.jclepro.2016.03.139.
- Mansor, M.R., Mastura, M.T., Sapuan, S.M. and Zainudin, A.Z. (2019) 'The environmental

- impact of natural fiber composites through life cycle assessment analysis', in *Durability and Life Prediction in Biocomposites, Fibre-Reinforced Composites and Hybrid Composites*. Elsevier, pp. 257–285. doi:10.1016/B978-0-08-102290-0.00011-8.
- Markatos, D.N., Katsiropoulos, C. V., Tserpes, K.I. and Pantelakis, S.G. (2021) 'A holistic End-of-Life (EoL) Index for the quantitative impact assessment of CFRP waste recycling techniques', *Manufacturing Review*, 8, p. 18. doi:10.1051/mfreview/2021016.
- Mayer, P. (2009) 'Guidelines for writing a Review Article A) Good to know about review articles', *Zurich-Based Plant Science Center*, pp. 1–10.
- Meng, F., Cui, Y., Pickering, S. and McKechnie, J. (2020) 'From aviation to aviation: Environmental and financial viability of closed-loop recycling of carbon fibre composite', *Composites Part B: Engineering*, 200(2020), p. 108362. doi:10.1016/j.compositesb.2020.108362.
- Meng, F., McKechnie, J., Turner, T. and Pickering, S.J. (2017) 'Energy and environmental assessment and reuse of fluidised bed recycled carbon fibres', *Composites Part A: Applied Science and Manufacturing*, 100, pp. 206–214. doi:10.1016/j.compositesa.2017.05.008.
- Meng, F., Olivetti, E.A., Zhao, Y., Chang, J.C., Pickering, S.J. and McKechnie, J. (2018) 'Comparing Life Cycle Energy and Global Warming Potential of Carbon Fiber Composite Recycling Technologies and Waste Management Options', *ACS Sustainable Chemistry & Engineering*, 6(8), pp. 9854–9865. doi:10.1021/acssuschemeng.8b01026.
- Meyer, L.O., Schulte, K. and Grove-Nielsen, E. (2009) 'CFRP-Recycling Following a Pyrolysis Route: Process Optimization and Potentials', *Journal of Composite Materials*, 43(9), pp. 1121–1132. doi:10.1177/0021998308097737.
- Ogi, K., Shinoda, T. and Mizui, M. (2005) 'Strength in concrete reinforced with recycled CFRP pieces', *Composites Part A: Applied Science and Manufacturing*, 36(7), pp. 893–902. doi:10.1016/j.compositesa.2004.12.009.
- Petrakli, F. *et al.* (2020) 'End-of-Life Recycling Options of (Nano)Enhanced CFRP Composite Prototypes Waste—A Life Cycle Perspective', *Polymers*, 12(9), p. 2129. doi:10.3390/polym12092129.
- Pickering, S.J. (2006) 'Recycling technologies for thermoset composite materials-current status', *Composites Part A: Applied Science and Manufacturing*, 37(8), pp. 1206–1215. doi:10.1016/j.compositesa.2005.05.030.
- Pillain, B., Gemechu, E. and Sonnemann, G. (2017) 'Identification of Key Sustainability Performance Indicators and related assessment methods for the carbon fiber recycling sector', *Ecological Indicators*, 72, pp. 833–847. doi:10.1016/j.ecolind.2016.08.056.
- Pimenta, S. and Pinho, S.T. (2011) 'Recycling carbon fibre reinforced polymers for structural applications: Technology review and market outlook', *Waste Management*, 31(2), pp. 378–392. doi:10.1016/j.wasman.2010.09.019.
- Prinçaud, M., Aymonier, C., Loppinet-Serani, A., Perry, N. and Sonnemann, G. (2014) 'Environmental Feasibility of the Recycling of Carbon Fibers from CFRPs by Solvolysis Using Supercritical Water', *ACS Sustainable Chemistry & Engineering*, 2(6), pp. 1498–1502. doi:10.1021/sc500174m.
- Reyes, T., Gouvinhas, R.P., Laratte, B. and Chevalier, B. (2020) 'A method for choosing adapted life cycle assessment indicators as a driver of environmental learning: a French textile case study', *Artificial Intelligence for Engineering Design, Analysis and Manufacturing*, 34(1), pp. 68–79. doi:10.1017/S0890060419000234.
- La Rosa, A.D., Banatao, D.R., Pastine, S.J., Latteri, A. and Cicala, G. (2016) 'Recycling

- treatment of carbon fibre/epoxy composites: Materials recovery and characterization and environmental impacts through life cycle assessment', *Composites Part B: Engineering*, 104, pp. 17–25. doi:10.1016/j.compositesb.2016.08.015.
- Rybicka, J., Tiwari, A. and Leeke, G.A. (2016) 'Technology readiness level assessment of composites recycling technologies', *Journal of Cleaner Production*, 112, pp. 1001–1012. doi:10.1016/j.jclepro.2015.08.104.
- Shibata, K. and Nakagawa, M. (2014) *CFRP Recycling Technology Using Depolymerization under Ordinary Pressure*. Available at: https://www.mc.showadenko.com/english/report/056/56_sou01.pdf.
- Shuaib, N.A. and Mativenga, P.T. (2017) 'Carbon Footprint Analysis of Fibre Reinforced Composite Recycling Processes', *Procedia Manufacturing*, 7, pp. 183–190. doi:10.1016/j.promfg.2016.12.046.
- da Silva, T.R. *et al.* (2021) 'Application of plastic wastes in construction materials: A review using the concept of life-cycle assessment in the context of recent research for future perspectives', *Materials*, 14(13). doi:10.3390/ma14133549.
- Simapro (2021) *SimaPro: LCA software to help you drive change*. Available at: <https://simapro.com/>.
- Song, Y.S., Youn, J.R. and Gutowski, T.G. (2009) 'Composites : Part A Life cycle energy analysis of fiber-reinforced composites', *Composites Part A*, 40(8), pp. 1257–1265. doi:10.1016/j.compositesa.2009.05.020.
- Tapper, R.J., Longana, M.L., Norton, A., Potter, K.D. and Hamerton, I. (2020) 'An evaluation of life cycle assessment and its application to the closed-loop recycling of carbon fibre reinforced polymers', *Composites Part B: Engineering*, 184, p. 107665. doi:10.1016/j.compositesb.2019.107665.
- Thiel, C., Campion, N., Landis, A., Jones, A., Schaefer, L. and Bilec, M. (2013) 'A Materials Life Cycle Assessment of a Net-Zero Energy Building', *Energies*, 6(2), pp. 1125–1141. doi:10.3390/en6021125.
- Vallero, D.A. (2019) 'Air pollution biogeochemistry', in *Air Pollution Calculations*. Elsevier, pp. 175–206. doi:10.1016/B978-0-12-814934-8.00008-9.
- Vo Dong, P.A., Azzaro-pantel, C. and Cadene, A. (2018) 'Economic and environmental assessment of recovery and disposal pathways for CFRP waste management', *Resources, Conservation & Recycling*, 133(2018), pp. 63–75. doi:10.1016/j.resconrec.2018.01.024.
- Witik, R.A., Payet, J., Michaud, V., Ludwig, C. and Månson, J.E. (2011) 'Composites : Part A Assessing the life cycle costs and environmental performance of lightweight materials in automobile applications', *Composites Part A*, 42(11), pp. 1694–1709. doi:10.1016/j.compositesa.2011.07.024.
- Witik, R.A., Teuscher, R., Michaud, V., Ludwig, C. and Månson, J.A.E. (2013) 'Carbon fibre reinforced composite waste: An environmental assessment of recycling, energy recovery and landfilling', *Composites Part A: Applied Science and Manufacturing*, 49(2013), pp. 89–99. doi:10.1016/j.compositesa.2013.02.009.
- Ylmén, P., Berlin, J., Mjörnell, K. and Arfvidsson, J. (2020) 'Managing Choice Uncertainties in Life-Cycle Assessment as a Decision-Support Tool for Building Design: A Case Study on Building Framework', *Sustainability*, 12(12), p. 5130. doi:10.3390/su12125130.

Environmental assessment of recycling carbon fibre-reinforced composites: current challenges and future opportunities

Meiirbekov, Arshyn

2022-11-19

Meiirbekov A, Amantayeva A, Tokbolat S, et al., (2022) Environmental assessment of recycling carbon fibre-reinforced composites: current challenges and future opportunities. In: Advances in processing of lightweight metal alloys and composites: microstructural characterization and property correlation, Singapore: Springer, November 2022, pp. 25-49

https://doi.org/10.1007/978-981-19-7146-4_2

Downloaded from CERES Research Repository, Cranfield University