

Accepted Manuscript

Exploring new horizons for paper recycling: A review of biomaterials and biorefinery feedstocks derived from wastepaper

Cynthia Adu, Mark Jolly, Vijay Kumar Thakur

PII: S2452-2236(17)30124-4

DOI: [10.1016/j.cogsc.2018.03.003](https://doi.org/10.1016/j.cogsc.2018.03.003)

Reference: COGSC 128

To appear in: *Current Opinion in Green and Sustainable Chemistry*


Received Date: 23 January 2018

Revised Date: 5 March 2018

Accepted Date: 7 March 2018

Please cite this article as: C. Adu, M. Jolly, V.K. Thakur, Exploring new horizons for paper recycling: A review of biomaterials and biorefinery feedstocks derived from wastepaper, *Current Opinion in Green and Sustainable Chemistry* (2018), doi: 10.1016/j.cogsc.2018.03.003.

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

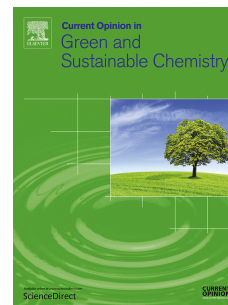

Exploring new horizons for paper recycling: A review of biomaterials and biorefinery feedstocks derived from wastepaper

Cynthia Adu^a, Mark Jolly^{a*}, Vijay Kumar Thakur^{b*}

^a*Sustainable Manufacturing Systems Center, School of Aerospace, Transport and Manufacturing, Cranfield University, MK43 0AL, UK*

^b*Enhanced Composites and Structures Center, School of Aerospace, Transport and Manufacturing, Cranfield University MK43 0AL, UK*

Abstract

Paper is a perfect example of the circular economy as it remains the furthestmost recycled product in Europe, creating significant environmental benefits and raw materials resources to the industry. Indeed, maintaining a consistent level of quality whilst limiting the environmental footprint of the product has become a major challenge for the industry. In this direction, paper is proving to be the promising feedstock for biorefinery and biomaterials. The future of paper recycling is slowly going beyond fibre recovery to address the needs of other industries because for the earth's environmental well-being various paper products need to be recycled and reused persistently. In this article, we outline the ambitious use of wastepaper (WP) for high-value applications such as; production of cellulose nanocrystals (CNC), composite reinforcement, high performance electrical components and biofuels.

Keywords: Wastepaper, Recycling, Cellulose, Ethanol, Hydrogen

1. Introduction

Paper recycling is a major process in the manufacturing of paper products. Europe boasts of 72% recycling rate recorded in 2012 and a 74% target is set for 2020 [1]. Although, paper can be recycled an average of 5 times, most paper products have a very short lifespan (days) which may not justify the amount of resources consumed for its production and its use in low value applications. The expectations for paper recycling rates to increase, requires the use of recycled fibers in high quality grade paper. However, these fibers become shorter and reduce the properties in swelling and flexibility which cannot meet the standards desired by customers. Furthermore, the demand for high quality paper products containing recycled fibers rely on the increasing use of chemical additives and fillers which produce large quantities of by-products posing serious environmental and economic challenges [2].

An overview of publications on paper recycling is illustrated in **Fig.1**. The authors reviewed publication overtime on Scopus database which showed that, early studies were focused on fiber recovery from wastepaper which included fiber bleaching methods and deinking technologies to allow the reuse of secondary fibers in papers, an increasing demand for deinking equipment was also noted

in the early nineties. Publications on paper recycling peaked in year 2000 perhaps in response to the European declaration on paper recycling released the same year [3]. In 2001-2010 publications were still dominated by fiber recovery. Nowadays circular economy principles are becoming attractive within regulators and policy makers, as the substitution of fossil fuel based products with bio-based or biodegradable materials is strategic for mitigating climate change. Thus, the current landscape on wastepaper recycling is populated with recovery of biomaterials and bio-refinery feedstock from waste paper which will be discussed in this review.

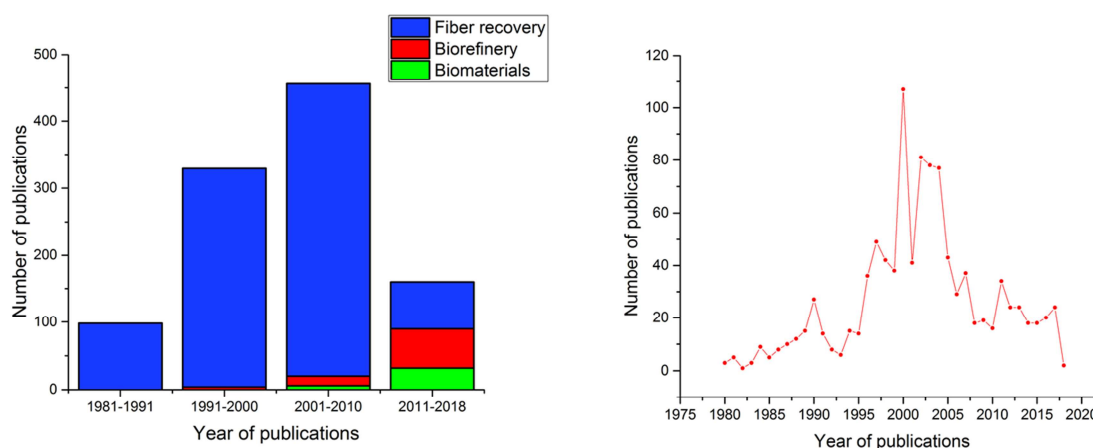


Fig.1 Publications on paper recycling: yearly publications showing increase in 2000 (left), publications by topic or research area (right)

2. Bio-materials synthesised from wastepaper

Paper is primarily a plant/wood based product containing high amount of cellulosic biomass desirable in a diverse range of industries. Cellulose is an abundant natural polymer consisting of crystalline and amorphous regions [4]. Over the past few years, there has been several research breakthroughs in the industrial production of cellulose nanofibers (CNF) and cellulose nanocrystal (CNC) proposing its use in high added value applications [5, 6]. Wastepaper has been used in the literature for the extraction of CNC/CNF, preparation of polyhydroxyalkanoate (PHA), carboxymethyl cellulose and polymer composite matrix. Meanwhile materials prepared from the synthesis of wastepaper have also been explored for producing high performance electronic components such as supercapacitors.

2.1. Cellulose nanocrystals

Cellulose contains amorphous regions known as hemicellulose which can be removed by acid hydrolysis or mechanical grinding resulting in the formation of a highly crystalline or semi crystalline structure exhibiting elastic modulus as high 137 GPa. Cellulose nanocrystal has been produced from various wastepaper sources such as: old news print (ONP), recycled newsprint (NP), old corrugated

container (OCC) and office waste paper (OWP). Cellulose can be obtained from pre-treatment of the wastepaper with sodium hydroxide (NaOH) to remove hemicellulose and bleaching with sodium hypochlorite (NaClO) to remove lignin. Nanocellulose crystals can be prepared with the renowned sulfuric acid hydrolysis method or enzymatic hydrolysis. The resulting properties of the CNCs derived from wastepaper is compiled in Table 1.

Table 1. Characteristics of CNCs prepared from various wastepaper sources

Source Material	Diameter (nm)	Length (nm)	CrI ¹ (%)	Treatment	Ref
ONP	3 - 10	100 - 300	75.9	Alkali and acid hydrolysis	[7]
NP	5.8±2.2	121±32.5	82.0	Alkali and acid hydrolysis	[8]
OCC	15-80	100-400	57.8	Enzymatic hydrolysis ²	[9]
ONP	2.9±0.99	371±74	92.6	Direct acid hydrolysis	[10]
NP	3.26±2.90	218±49	93.4	Direct acid hydrolysis	“
NP-B	4.40±3.91	356±137	94.8	Alkali and acid hydrolysis	“
OWP	33±5	238±72	84	Alkali and acid hydrolysis ³	[11]
OWP	32±5	196±61	73	Alkali and acid hydrolysis ⁴	“

The dimension of the wastepaper CNCs obtained above are comparable to CNCs prepared from material sources such as cotton, tunicate, bacteria, ramie and sisal. The CNCs derived from some wastepaper showed aspect ratio between 10-70. CNC vary from 10-100nm in length and 4-70nm in diameter although the crystallinity of CNC (95.5%) derived from pure cellulose is higher. It was shown that with direct acid hydrolysis and no bleaching of the newsprints the CNCs produced had similar properties to bleached newsprint (NP-B) [10]. Thus, Waste paper presents a cheap source for CNC production especially in application whereby the presence of ink, colouring and impurities is of less importance.

2.2. Composite reinforcement

Fibers are commonly used as reinforcing materials in composite applications because of their high aspect ratios which provide high tensile strength and other material properties. Wastepaper (WP) was used as a filler in samples of polyester (P) and polyurethane (PU) as a matrix, with matrix to filler ratio of 20:80 [12]. The tensile strength for the P/WP composite reduced from 17.8±0.5 MPa to

¹ Crystallinity index

² 60% phosphoric acid was used for pre-treatment prior to enzymatic hydrolysis and sonication

³ 2 wt. % sodium hydroxide solution treatment

⁴ 7.5 wt. % sodium hydroxide solution treatment

4.4±2.5 MPa whilst modulus increased from 2286±751 MPa to 3144±248 MPa. Nevertheless, another study with 50:50 P/WP ratios reported a significant increase of 30% in the material tensile strength [13] which signifies that there might be an optimum point whereby further addition of wastepaper causes reduction in tensile strength. For the PU/WP, composite strength increased slightly from 1.2±0.2 MPa to 7.8±0.7 MPa whilst elastic modulus increased greatly from 13±3 to 741±113. The mechanical properties in both studies were reduced by 20-30% with increasing moisture uptake due to high cellulose content. The interfacial adhesion of wastepaper in polymer composite matrix can be enhanced by polymer grafting. Maleic anhydride grafted linear low density polyethylene (LLDPE-g-MA) reinforced with WP composites showed significant improvement in tensile strength (88%) and elastic modulus (409%) caused by increased interaction between the wastepaper hydroxyl groups and the anhydride groups [14]. CNC of 20 nm -60 nm widths obtained by acid hydrolysis of wastepaper were used to substitute carbon black for natural rubber (NR) reinforcement which showed few effects on the mechanical properties and improved the processing properties of the NR [15]. Inorganic fillers in recycled paper such as kaolin clay and precipitated calcium carbonate (PCC) have been replaced with CNF which were proven to have a higher bursting and tensile strength [16, 17]. Waste paper fibres have also been incorporated into building materials such as concrete, mortars, bricks and cement based composites [18–20].

2.3. Bio-polymer

CNC films exhibit high transparency, light weight, biodegradability and barrier properties proposing them for packaging applications [21]. Transparent CNC films prepared from OWP were used to coat poly-ethylene terephthalate (PET). The coating with CNC resulted in improved water vapour barrier thought to be beneficial for elongating the shelf life of packaged food products [22]. It was also found that some films appeared dark however still had higher transparency (65%) than others which appeared clear (59%). Sodium alginate/carboxymethyl cellulose (NaCMC) bio-composite films were prepared from old NP. Although the tensile strength of the films (2MPa) was lower than LDPE and HDPE, the materials were deemed suitable for low mechanical packaging applications [23]. The enzymatic hydrolysis of office waste paper produced fermentable sugars used in preparation of Poly (3-hydroxybutyrate) (PHB), a short chain length PHA [24]. Polyhydroxyalkanoates (PHAs) are a family of biodegradable polyesters produced by the microorganisms synthesised in presence of excess carbon source [25]. Although PHAs have their limitations in comparison to synthetic plastics which include high production cost, incompatibility with legacy processing techniques and chances of thermal degradation, improved mechanical properties have been identified when blended with other polymer materials or after chemical modification.

2.4. Electronic components

Hybridisation of Li-ion batteries with electrochemical capacitors require the use of carbonaceous materials with high surface area such as graphene, activated carbon, biomass derived activated carbon for electrode material [26, 27]. Such Li-ion hybrid electrochemical capacitors (Li-HEC) are regarded as potential avenue for efficient energy storage systems. Porous carbon derived from hydrothermal processing and pyrolysis of OWP was used as a cheap source for cathode material in Li-HEC. The material had a high surface area porosity of $2341\text{m}^2/\text{g}$ with energy storage capacity of 61 Wh Kg^{-1} [28]. Wastepaper converted into graphene-tethered carbon fibre composite paper (GCCP) demonstrated high electrical conductivity and electrochemical stability for electrodes [29]. Flexible supercapacitors were derived from anchoring reduced graphene oxide-manganese dioxide (RGO- MnO_2) onto OWP. The electrode material exhibited energy storage capacity of 19.6 Wh Kg^{-1} and was proposed for wearable electronic device [30]. Cyanoethyl cellulose derived from waste paper can also be used for organic field-electric transistors (OFETs) [31, 32], such organic based components are receiving attention for their low-cost, ease of processing, flexibility and lightweight circuits suitable in applications for ultra-low power electronics such as radio frequency identification (RFID) tags, biodegradable electronics for medical implant, sensor devices and so on.

3. Wastepaper derived biofuels

The biofuel potential of wastepaper is estimated to replace up to 5% of fossil fuel consumption [33]. In recent studies, the use of wastepaper as feedstock for various energy production such as ethanol, methane and hydrogen has shown promising results.

3.1. Bio-ethanol from wastepaper

Wastepaper has been used as feedstock in anaerobic digestion to produce bio-ethanol and methane through enzymatic hydrolysis [34, 35]. Enzymatic hydrolysis uses enzymes to degrade the cellulose and lignin which produces reducing sugars such as glucose, the fermentation of the glucose produces bio-ethanol which can also be converted to methane [36] as illustrated in Fig. 2.

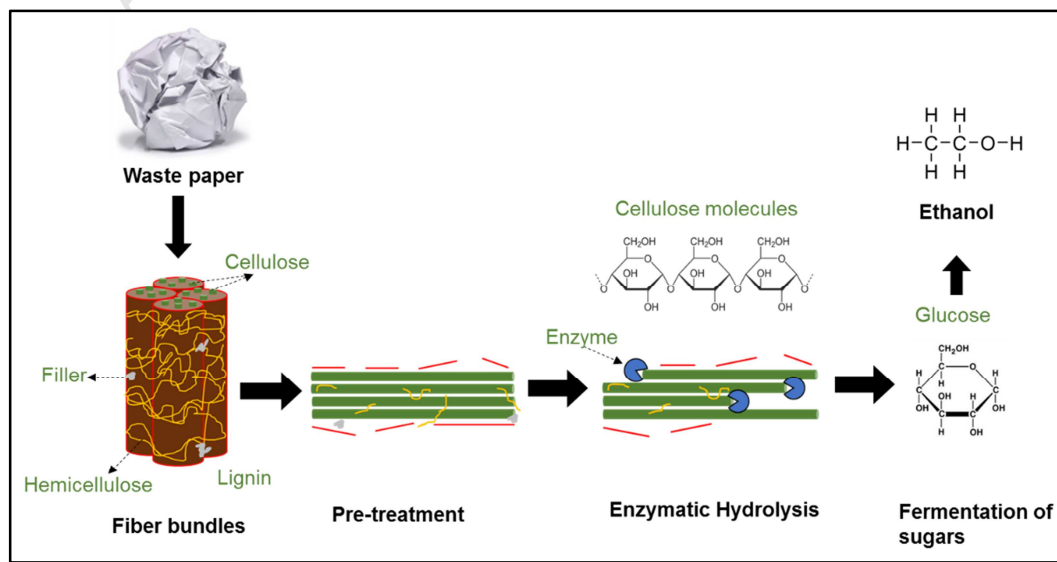


Fig.2. A schematic of the enzymatic hydrolysis of wastepaper to produce fermentable sugars.

The efficiency of hydrolysis process on glucose yield is affected by costly enzymes and long retention times. Recently pre-treatment methods have been shown to improve process yield by disrupting the crystalline structure and increasing the surface area. This enhances the enzymes accessibility to cellulose and reduces enzyme loading. Chemical and physical pre-treatment methods were evaluated to show their effect on glucose release after enzymatic hydrolysis of WP. The maximum glucose yield after milling the WP to 10 mesh was < 0.5 g/L whilst 25 g/L was obtained after sulfuric acid treatment leading to reduction of enzyme loading by 50% [37]. Nevertheless, another study showed that mechanical pre-treatment of WP with Hollander beater prior to enzymatic hydrolysis increased methane yield in anaerobic digestion by 21% at 254 mL/g VS [38], Nishimura *et al* reported higher methane yield of 270.5 mL/g VS when yeast was used for presaccharification prior to simultaneous scarification and fermentation (SSF) [39, 40].

3.2. Hydrogen production

Hydrogen gas is a clean fuel source due to its non-polluting nature during combustion. Biological production of hydrogen through dark fermentation is less energy intensive compared to steam reforming of hydrocarbons and water electrolysis [41]. Fermentation of sugars derived from acid hydrolysis of wastepaper has been proven to produce hydrogen gas. However a limitation in hydrogen yield is the inhibition of the fermentation process caused by furfurals generated during acid hydrolysis stage [42]. Activated carbon has been effective for the removal of Hydroxymethylfurfural (5-HMF) from media after the hydrolysis of wastepaper [43] another study also used lime treatment to reduce 5-HMF from 2.48 g/L to 0.35 g/L [44]. Botta *et al*, applied rumen fluid as an inoculum in wastepaper fermentation, this enriched fermentative spore forming bacterial capable of producing hydrogen. Additionally acid pre-treatment of the rumen fluid reduced the hydrogen consuming cultures [45].

4. Conclusions

Recycling of paper offers several benefits including cost-effectiveness of the process and new emerging market applications. This article highlights that the future of paper recycling will go beyond fiber recovery to recycling wastepaper into functional materials and biorefinery feedstock of higher value. The most prevalent method in the literature for converting wastepaper into CNC is the acid

hydrolysis process, however from green chemistry perspectives, more sustainable approaches such as ionic liquid treatment and mechanical refining requires investigation for CNC production from wastepaper. From the energy perspectives, whilst derivation of methane from AD of wastepaper is not especially new, efforts such as pre-treatment, presaccharification and co-digestion have been applied in the literature to improve the process yield and plant economic feasibility. On the bio hydrogen production from wastepaper, the dark fermentation produces mixed gas streams which require improved gas separation technologies to obtain pure hydrogen.

References

* of special interest

1. EPRC (2016) European declaration on paper recycling 2016-2020.
2. Faubert P, Barnabé S, Bouchard S, et al (2016) Pulp and paper mill sludge management practices: What are the challenges to assess the impacts on greenhouse gas emissions? *Resour Conserv Recycl* 108:107–133. doi: 10.1016/j.resconrec.2016.01.007
3. CEPI (2000) European Declaration on Paper Recovery.
4. Moon RJ, Martini A, Nairn J, et al (2011) Cellulose nanomaterials review: structure, properties and nanocomposites. *Chem Soc Rev*. doi: 10.1039/c0cs00108b
5. Nechyporchuk O, Belgacem MN, Bras J (2016) Production of cellulose nanofibrils: A review of recent advances. *Ind Crops Prod* 93:2–25. doi: 10.1016/j.indcrop.2016.02.016
6. Trache D, Hussin MH, Haafiz MKM, Thakur VK (2017) Recent progress in cellulose nanocrystals: sources and production. *Nanoscale* 9:1763–1786. doi: 10.1039/C6NR09494E
7. *Danial WH, Abdul Majid Z, Mohd Muhid MN, et al (2015) The reuse of wastepaper for the extraction of cellulose nanocrystals. *Carbohydr Polym* 118:165–169. doi: 10.1016/j.carbpol.2014.10.072
8. Mohamed MA, Salleh WNW, Jaafar J, et al (2015) Physicochemical properties of “green” nanocrystalline cellulose isolated from recycled newspaper. *RSC Adv* 5:29842–29849. doi: 10.1039/C4RA17020B
9. Tang Y, Shen X, Zhang J, et al (2015) Extraction of cellulose nano-crystals from old corrugated container fiber using phosphoric acid and enzymatic hydrolysis followed by sonication. *Carbohydr Polym* 125:360–366. doi: 10.1016/j.carbpol.2015.02.063
10. Campano C, Miranda R, Merayo N, et al (2017) Direct production of cellulose nanocrystals from old newspapers and recycled newsprint. *Carbohydr Polym* 173:489–496. doi: 10.1016/j.carbpol.2017.05.073
11. *Orue A, Santamaria-Echart A, Eceiza A, et al (2017) Office waste paper as cellulose nanocrystal source. *J Appl Polym Sci* 134:1–11. doi: 10.1002/app.45257
12. *Calegari EP, Porto JS, Angrizani CC, et al (2017) Reuse of waste paper and rice hulls as filler in polymeric matrix composites. *Rev Mater*. doi: 10.1590/s1517-707620170002.0179
13. *Das S (2017) Mechanical and water swelling properties of waste paper reinforced unsaturated polyester composites. *Constr Build Mater* 138:469–478. doi: 10.1016/j.conbuildmat.2017.02.041
14. Saini A, Yadav C, Bera M, et al (2017) Maleic anhydride grafted linear low-density polyethylene/waste paper powder composites with superior mechanical behavior. *J Appl Polym Sci*. doi: 10.1002/app.45167
15. Wang J, Huang F, Huang S, Gu J (2016) Influence of wastepaper nanocrystalline cellulose on curing behavior and processing properties of natural rubber reinforced by carbon black. *Polym Mater Sci Eng* 32:43–48.
16. *Campano C, Merayo N, Balea A, et al (2018) Mechanical and chemical dispersion of nanocelluloses to improve their reinforcing effect on recycled paper. *Cellulose* 25:269–280. doi: 10.1007/s10570-017-1552-y
17. He M, Cho BU, Won JM (2016) Effect of precipitated calcium carbonate - Cellulose nanofibrils composite filler on paper properties. *Carbohydr Polym* 136:820–825. doi: 10.1016/j.carbpol.2015.09.069
18. Selvaraj R, Bhuvaneshwari B (2010) Formulation and Characterization Study of Paper Concrete: A Futuristic Building Material. *J Struct Eng* 37:43–48.
19. *Sudarsan JS, Ramesh S, Jothilingam M, et al (2017) Papercrete brick as an alternate building material to control Environmental Pollution Papercrete brick as an alternate building material to control Environmental Pollution. doi: 10.1088/1755-1315/80/1/012017

20. Hospodarova V, Stevulova N, Vaclavik V, Dvorsky T (2017) Implementation of recycled cellulosic fibres into cement based composites and testing their influence on resulting properties Implementation of recycled cellulosic fibres into cement based composites and testing their influence on resulting properties.
21. Galotto M, Ulloa P (2015) The potential of NanoCellulose in the packaging field: A review. *Packag Technol Sci* 28:475–508. doi: 10.1002/pts.2121
22. *Lei W, Fang C, Zhou X, et al (2018) Cellulose nanocrystals obtained from office waste paper and their potential application in PET packing materials. *Carbohydr Polym* 181:376–385. doi: 10.1016/j.carbpol.2017.10.059
23. Kale RD, Maurya Y, Potdar T (2017) Paper-reinforced sodium alginate/carboxyl methyl cellulose-based bio-composite films. *J Plast Film Sheeting* 875608791771567. doi: 10.1177/8756087917715675
24. Neelamegam A, Al-Battashi H, Al-Bahry S, Nallusamy S (2018) Biorefinery production of poly-3-hydroxybutyrate using waste office paper hydrolysate as feedstock for microbial fermentation. *J Biotechnol* 265:25–30. doi: 10.1016/j.jbiotec.2017.11.002
25. Li Z, Yang J, Loh XJ (2016) Polyhydroxyalkanoates: Opening doors for a sustainable future. *NPG Asia Mater* 8:e265-20. doi: 10.1038/am.2016.48
26. *Borenstein A, Hanna O, Attias R, et al (2017) Carbon-based composite materials for supercapacitor electrodes: a review. *J Mater Chem A* 5:12653–12672. doi: 10.1039/C7TA00863E
27. *Ramirez-Castro C, Sch??tter C, Passerini S, Balducci A (2016) Microporous carbonaceous materials prepared from biowaste for supercapacitor application. *Electrochim Acta* 206:452–457. doi: 10.1016/j.electacta.2015.12.126
28. Puthusseri D, Aravindan V, Anothumakkool B, et al (2014) From waste paper basket to solid state and Li-HEC ultracapacitor electrodes: A value added journey for shredded office paper. *Small* 10:4395–4402. doi: 10.1002/smll.201401041
29. Ye T-N, Feng W-J, Zhang B, et al (2015) Converting waste paper to multifunctional graphene-decorated carbon paper: from trash to treasure. *J Mater Chem A* 3:13926–13932. doi: 10.1039/C5TA03485J
30. *Su H, Zhu P, Zhang L, et al (2017) Waste to wealth: A sustainable and flexible supercapacitor based on office waste paper electrodes. *J Electroanal Chem* 786:28–34. doi: 10.1016/j.jelechem.2017.01.002
31. Faraji S, Danesh E, Tate DJ, et al (2016) Cyanoethyl cellulose-based nanocomposite dielectric for low-voltage, solution-processed organic field-effect transistors (OFETs). *J Phys D Appl Phys*. doi: 10.1088/0022-3727/49/18/185102
32. Joshi G, Naithani S, Varshney VK, et al (2017) Potential use of waste paper for the synthesis of cyanoethyl cellulose: A cleaner production approach towards sustainable environment management. *J Clean Prod* 142:3759–3768. doi: 10.1016/j.jclepro.2016.10.089
33. SHI AZ, KOH LP, TAN HTW (2009) The biofuel potential of municipal solid waste. *GCB Bioenergy* 1:317–320. doi: 10.1111/j.1757-1707.2009.01024.x
34. Bilal M, Asgher M, Iqbal HMN, Ramzan M (2017) Enhanced Bio-ethanol Production from Old Newspapers Waste Through Alkali and Enzymatic Delignification. *Waste and Biomass Valorization* 8:2271–2281. doi: 10.1007/s12649-017-9871-7
35. *Li W, Ji P, Zhou Q, et al (2018) Insights into the Synergistic Biodegradation of Waste Papers Using a Combination of Thermostable Endoglucanase and Cellobiohydrolase from *Chaetomium thermophilum*. *Mol Biotechnol* 60:49–54. doi: 10.1007/s12033-017-0043-6
36. Byadgi SA, Kalburgi PB (2016) Production of Bioethanol from Waste Newspaper. *Procedia Environ Sci* 35:555–562. doi: 10.1016/j.proenv.2016.07.040
37. da Mota HG, Gouveia ER (2016) Improvement in Enzymatic Hydrolysis of Waste Office Paper with Chemical Pretreatment and Enzyme Loading Reduced. *Waste and Biomass Valorization* 7:507–512. doi: 10.1007/s12649-015-9475-z
38. Rodriguez C, Alaswad A, El-Hassan Z, Olabi AG (2017) Mechanical pretreatment of waste paper for

- biogas production. *Waste Manag* 68:157–164. doi: 10.1016/j.wasman.2017.06.040
39. Nishimura H, Tan L, Sun ZY, et al (2016) Efficient production of ethanol from waste paper and the biochemical methane potential of stillage eluted from ethanol fermentation. *Waste Manag* 48:644–651. doi: 10.1016/j.wasman.2015.11.051
40. Nishimura H, Tan L, Kira N, et al (2017) Production of ethanol from a mixture of waste paper and kitchen waste via a process of successive liquefaction, presaccharification, and simultaneous saccharification and fermentation. *Waste Manag* 67:86–94. doi: 10.1016/j.wasman.2017.04.030
41. Hallenbeck PC (2009) Fermentative hydrogen production: Principles, progress, and prognosis. *Int J Hydrogen Energy* 34:7379–7389. doi: 10.1016/j.ijhydene.2008.12.080
42. *Eker S, Sarp M (2017) Hydrogen gas production from waste paper by dark fermentation: Effects of initial substrate and biomass concentrations. *Int J Hydrogen Energy* 42:2562–2568. doi: 10.1016/j.ijhydene.2016.04.020
43. Argun H, Onaran G (2016) Hydrogen gas production from waste paper by sequential dark fermentation and electrohydrolysis. *Int J Hydrogen Energy* 41:8057–8066. doi: 10.1016/j.ijhydene.2015.12.087
44. *Argun H, Onaran G (2017) Dark Fermentative Hydrogen Gas Production from Lime Treated Waste Paper Towel Hydrolysate. *Waste and Biomass Valorization* 0:1–10. doi: 10.1007/s12649-017-9957-2
45. Botta LS, Ratti RP, Sakamoto IK, et al (2016) Bioconversion of waste office paper to hydrogen using pretreated rumen fluid inoculum. *Bioprocess Biosyst Eng* 39:1887–1897. doi: 10.1007/s00449-016-1663-0

Exploring new horizons for paper recycling: A review of biomaterials and biorefinery feedstocks derived from wastepaper

Adu, Cynthia

2018-03-09

Attribution-NonCommercial-NoDerivatives 4.0 International

Adu C, Thakur VK, Jolly M. Exploring new horizons for paper recycling: A review of biomaterials and biorefinery feedstocks derived from wastepaper. *Current Opinion in Green and Sustainable Chemistry*, Volume 13, October 2018, pp. 21-26

<http://dx.doi.org/10.1016/j.cogsc.2018.03.003>

Downloaded from CERES Research Repository, Cranfield University