
Ultra Dense Satellite-Enabled 6G Networks: Resource Optimization and Interference Management

Xiangnan Liu^{1,2}, Haijun Zhang^{1,2,*}, Min Sheng³, Wei Li⁴, Saba Al-Rubaye⁵, Keping Long^{1,2}

¹ School of Computer & Communication Engineering, University of Science and Technology Beijing, Beijing 100083, China

² Beijing Engineering and Technology Research Center for Convergence Networks and Ubiquitous Services, University of Science and Technology Beijing, Beijing 100083, China

³ School of Telecommunications Engineering, Xidian University, Xi'an 710071, China

⁴ State Radio Monitoring Center of China, Beijing 100037, China

⁵ School of Aerospace Transport and Manufacturing, Cranfield University, MK43 0AL, UK

* The corresponding author, email: haijunzhang@ieee.org

Abstract: With the evolution of the sixth generation (6G) mobile communication technology, ample attention has gone to the integrated terrestrial-satellite networks. This paper notes that four typical application scenarios of integrated terrestrial-satellite networks are integrated into ultra dense satellite-enabled 6G networks architecture. Then the subchannel and power allocation schemes for the downlink of the ultra dense satellite-enabled 6G heterogeneous networks are introduced. Satellite mobile edge computing (SMEC) with edge caching in three-layer heterogeneous networks serves to reduce the link traffic of networks. Furthermore, a scheme for interference management is presented, involving quality-of-service (QoS) and co-tier/cross-tier interference constraints. The simulation results show that the proposed schemes can significantly increase the total capacity of ultra dense satellite-enabled 6G heterogeneous networks.

Keywords: satellite-enabled 6G networks; network architecture; resource optimization; interference management

I. INTRODUCTION

As the next generation mobile networks develop, new challenges and requirements arise from the surge of transmission traffic. The sixth generation (6G) wireless system will break through the limitation of terrain and thereby realize ubiquitous connection by a whole-earth coverage [1]. Many novel enabling technologies are initiated, such as terahertz communication [2], intelligent reflecting surface [3], and federated learning [4], etc. In the context of these state-of-the-art technologies, the integrated terrestrial-satellite networks can provide various benefits including a larger capacity of wideband transmission and a wider coverage area. Therefore, integrated terrestrial-satellite networks incorporating the relatively independent satellite networks into terrestrial cellular networks becomes a trend. As an integral whole of satellite networks and the terrestrial networks, integrated terrestrial-satellite networks provide globally seamless, ubiquitous services accessible to Internet [5].

In the past two decades, human beings have always been trying to realize the construction of the integrated terrestrial-satellite networks [6–9]. In the end of the 20th century, Motorola proposed a satellite communication network plan named “Iridium Project” [10]. It

can be regarded as an endeavor to support the globally wireless communications among different ground stations by means of the satellites. Unfortunately, the project ahead of its time failed because of costly expenses and a limited number of initial user terminals. However, recent advances in low earth orbit (LEO) satellite networks over the high-frequency band have provided an alternative solution for coverage extension and backhaul connectivity. SpaceX, this famous LEO satellite company planed to launch circa 12, 000 Starlink Internet satellites would dominate the lower part of the Earth orbit, below 600 km [11]. To obtain more communication resources, the United States, Europe, and China have accelerated the deployment of LEO satellites to support communications of integrated terrestrial-satellite networks.

Motivated by the rapid development of integrated terrestrial-satellite networks deployment, the academics and industries focused on the research emphases below, including access control, dynamic backhaul links, multicast protocols, offloading of mobile edge computing (MEC) [12], software-defined networking (SDN) [13], network functions virtualization control [14], as well as coordination of high and low orbit satellites, etc. The broadcast and multicast function of LEO satellites ensures tasks of ground user terminals to be processed by MEC servers [12]. The ultra dense networks are densely deployed to satisfy the dramatically increasing traffic demands [15]. Based on this technique, researchers have established a theoretical model of a ultra dense LEO terrestrial-satellite networks, in which LEO-based small cell have better performance on data offloading as the traffic load increases [16]. Network functionalities over satellite networks have been researched actively. With the absence of a proximal MEC server, each user terminal in satellite-terrestrial integrated networks can also experience MEC services via satellite links [17]. As for dealing with the interference between Geostationary (GSO) satellites and LEO satellites, the popular solutions, such as the progressive pitch method and the coverage-expanding method, underpin the same principle, which is to transfer the interference to neighbor satellites before the host satellite turns off [18].

Nowadays, with the deeper integration of communication, computing, storage resources in mobile communication network, the resource allocation in satellite-terrestrial integrated networks is no longer

limited to a single domain of communication resources. The work in [16] considers the optimization of user associations, sub-channel allocation and power control in the ultra-dense LEO networks. This work in [19] begins to extend from the communications domain to the caching deployment based on the consideration of popularity. The work in [20] considers the joint allocation of resources for the communication domain, the cache domain, and the computing domain, and proposes a deep Q learning method to explore the maximum reward. The authors focus on the allocation of resources in three areas in the context of throughput equity and data security [21]. However, These current efforts all involves the three-domain resources of a single LEO satellite, and there is still little research on the heterogeneous ultra-dense satellite networks.

On the other hand, the interference management of ultra-dense heterogeneous networks is also worth of to be studied. In [22], power is allocated with interference constraint to achieve interference management purposes, taking into account energy efficiency. Interference management is achieved through power control, and the data rate of the interference signal is lower than that of quality of service (QoS) constraint [23, 24]. It can be seen that it is feasible to establish interference management for the satellite-terrestrial integrated networks on the scheme of resource management.

Motivated by the related works, we investigate the subchannel allocation and power control in the communication domain. Besides, the SMEC and caching deployment are designed in the heterogeneous ultra-dense satellite networks. Under the scheme of resource optimization, the interference management cooperated with cognitive radio is trailed in the heterogeneous ultra-dense satellite networks.

Different from the existing studies of satellite enabled networks, the paper focuses on the downlink of wireless communications heterogeneous networks with LEO and GSO satellites. On this basis, resource optimization and interference management are explored by utilizing edge caching and analyzing different kinds of interference is demonstrated first.. An architecture of ultra dense satellite-enabled 6G heterogeneous networks. Then an effective algorithm of resource allocation is designed in the satellite enabled 6G networks to promote the total capacity of networks.

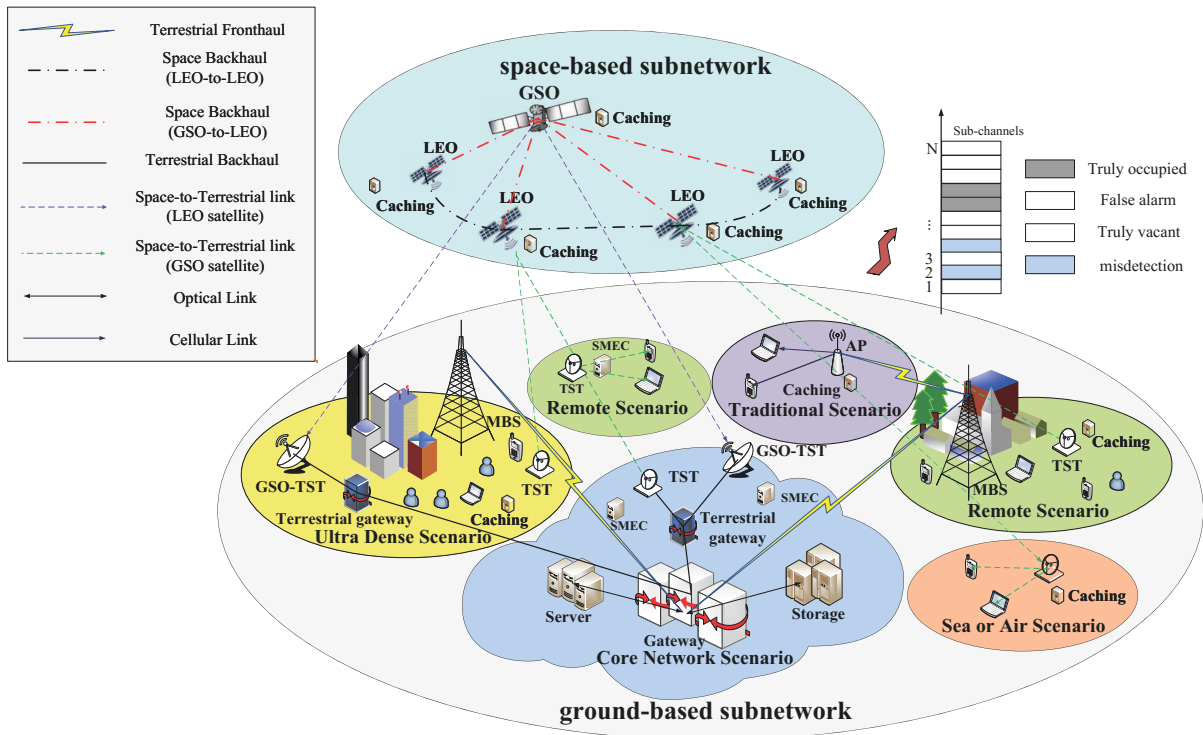


Figure 1. An architecture of ultra dense satellite-enabled 6G heterogeneous networks.

Furthermore, the network interference and the strategy of interference management are analyzed. Finally, conclusions grounded on the simulation results put final touches to the paper.

II. ULTRA DENSE SATELLITE-ENABLED 6G NETWORKS ARCHITECTURE

It is viable that the ultra dense satellite-enabled 6G heterogeneous networks productively utilize satellites in a full range of orbits to scale up their capacity. Through the inter-satellite link and ground-satellite one, the communication terminals on the ground, in the sea, air or deep space are intensively integrated. Satellites are able to handle complex communication environments, such as crowded urban areas where space is limited or sea areas where gateways are difficult to be deployed. It can be either on-demand integration of the existing satellite systems or the result of integrated design according to requirements.

Based on the analysis of application scenarios, Figure 1 depicts the architecture of satellite enabled 6G heterogeneous networks. This architecture displays two major sorts, ground-based one and space-based one. The focal point of the ground-space communi-

cation is on the space segments, for it can save redundant costs with participation of the ground gateway. The subnetwork mentioned above consists of satellites which access user terminals to the space. The emphases of future research on profoundly integrated ground-space networks are not only the communication itself but also the computing and storage. What needs to be considered is multi-dimensional resource management and allocation. The paper studies the space-based subnetworks and LEO satellites supportive of terrestrial communication as well as GSO satellites gathering information of space-based subnetworks and transmitting the control signal between two subnetworks, and four application aspects discussed as below.

2.1 The Aspect of Core Networks

Given that not all data can be computed in the local network, certain tasks call for more storage and servers. Moreover, numerous videos, files and images should be stored in core networks. So the terrestrial gateway stations (TGSs) should be set to connect core networks, i.e. a cellular network, a cloud center or a regional IP network. Once equipped with powerful di-

rectional antennas, TGSs can sustain the operation of multiple user terminals.

2.2 The Aspect of Metropolitan Areas

There are plenty of user terminals in the metropolises where colleges or corporations stand. An essential prerequisite for this case in which the deployment of a few TGSs and enough terrestrial satellite terminals (TSTs) is the terrestrial stations equipped with more powerful antennas. Compared to TGSs, TSTs' antenna is not powerful and can relay data for a small group of user terminals. Since habitats of human beings are vastly at middle and low latitudes, LEO and GSO satellites are the agents of relay service.

2.3 The Aspect of Remote Areas

There are still some user requirements in the remote ground area, such as villages, isolated islands or mountainous areas. The remote areas include sparsely populated rural areas and mountainous areas. Without specific latitudinal constraints, the services from LEO satellite sites at any latitude are deliverable [25]. Considering the limited user terminals and infrastructure costs, one TST is apportioned in one region. In some circumstances, UAVs are deployed to cope with an upsurge in requests in case of some events.

2.4 The Aspects of Seas or Air

Unlike the aspects above, communication, computation, and storage capacities of user terminals are considerably limited when the user terminals are served in the seas or air, because the base stations are difficult to deploy. The sea and air are deployed the base stations difficultly. These scenarios are not like lower-dense population in seas and air and have to support hotspot coverage. Meanwhile, aircraft and ships in motion ramp up the difficulty level of designing the ultra dense satellite-enabled networks. The antennas with lower power embed in the vehicles. There should be a compromise between the cost of antennas and user terminals.

As shown in Figure 1, each satellite with caching can promote the performance of the entire networks. In face of the system capacity impacted by constantly-moving satellites, the multi-layer caching is employed to deal with the demands of the real-time service from

terrestrial user terminals. In this case, each access point (AP) receives the same data request, with direct response to the source server. Therefore, repetitive transmission of content and spares excess traffic is avoided, which upgrades the service quality of the networks. Meanwhile, each satellite has an ability to recognize, especially imperfect spectrum information resulting from long propagation delay in space.

In the following two sections, resource optimization is formulated as an capacity maximization for the downlink of ultra dense satellite-enabled heterogeneous networks. The case aims to maximize the capacity of entire networks through resource allocation, which facilitates researchers and operators to observe the performances of the following algorithms. With reference to interference management, cognitive satellites are obtained in the proposed architecture. Spontaneously, interference from other satellites is managed.

III. RESOURCE ALLOCATION SCHEME IN ULTRA DENSE SATELLITE-ENABLED 6G NETWORKS

This section focuses on the subchannel allocation and power control in the ultra dense satellite-enabled heterogeneous networks, where the coverage of one GSO satellite overlaps that of spectrum-sharing LEO satellites. Heterogeneous QoS requirements for user terminals is a key indicator in the scheme. The capacity of networks is also influenced by the sets of caching and strategies of adjustment.

3.1 Subchannel Allocation and Power Control

According to the International Telecommunication Union (ITU)'s regulation [26], the communication of GSO satellites processes prior to the LEO ones. GSO satellites may pose some potential problems, specifically interference and resource contention. A common and empirical solution is turning off the LEO satellites that block the links of GSO satellites, and other LEO satellites act as supplements [18]. In the proposed heterogeneous networks, user terminals can receive miscellaneous signals from the LEO satellites and even from some remoter GSO ones simultaneously. When involved in the downlink of ultra dense satellite-enabled heterogeneous networks, a primary GSO satellite acts as the AP. It is different from those

LEO satellites which are denoted as a set of small cells. Each LEO satellite hosts one small AP and U user terminals that are randomly distributed within the LEO's terrestrial reference point. To be exact, the terrestrial reference points of LEO satellites upright projections on the surface of the earth. The total bandwidth of the system is denoted as B , which is divided into Q subchannels and each subchannel occupies a bandwidth of B/Q . The LEO satellites transmit signals to U user terminals through these Q subchannels.

Let P_{s1} and P_{s2} represent the power budget for the GSO satellites and LEO satellites respectively, assuming that all the LEO satellites have transmit power P_{s2} and each user terminal of LEO satellites has initial transmit power P_{s2}/Q . The earth-satellite links are much shorter, which results in lower power [27]. The power budget of GSO P_{s1} should be higher than LEO's P_{s2} . A block fading channel is considered in the system model, where the channel fading of each sub-carrier is assumed to be the same within a sub-band, but it varies independently across different sub-bands. It is obvious that user terminals also receive other LEO satellites' and GSO satellites' signals, resulting in the unnecessary interference.

Derived from Lutz's model [28], the principle is utilized to model the link of land mobile satellite. The

$$C_{m,n,q} = \log_2 \left(1 + \frac{x_{m,n,q} p_{m,n,q} g_{m,n}^{m,n} |h_{m,n,q}|^2}{\sum_{n' \neq n}^N \sum_{m'=1}^M x_{m',n',q} p_{m',n',q} g_{m',n'}^{m',n'} |h_{m',n',q}|^2 + \sigma^2} \right) = \log_2 (1 + r_{m,n,q}). \quad (1)$$

The mathematical expression of uplink transmission capacity is given as the Eq. (1). The $g_{m,n}^{m,n}$ is denoted as the antenna gain of satellite m towards satellite n and $g_{m',n'}^{m',n'}$ is the off-axis antenna gain of satellite m' towards the direction of user terminal n . The σ^2 represents the additive white Gaussian noise. In the designed constraints, constraint $C1$ implies the transmit power constraint, where P_{max} is the maximum transmit power of each satellite. As it is typical for the orthogonal use of frequency resources within each satellite, which is guaranteed by constraint $C2$. The angle constraint can then be denoted as constraint $C3$. θ_{th} is defined as the angular separation between satellites. Constraint $C4$ ensures the QoS guarantee of each user terminal. Constraints $C5$ and $C6$ are added, based

channel fading of each subchannel is designed in two types. One is composed of large-scale fading and Rayleigh fading. The other one is composed of large-scale fading and Rician fading. In this model, the channel gain is classified into two types, the better one is applied by Rician fading, and while the worse one works with Rayleigh fading. It is hypothesized that the user terminals that the satellites supported in its coverage area would obtain the Rician fading, or else the signal from other satellites would go through with Rayleigh fading. We denote $h_{m,n,q}$ as the channel state between the m -th satellite and the n -th user terminal in the q -th subchannel.

Let the binary matrix $\mathbf{X} \in \mathbb{R}^{M \times N \times Q}$ denote the subchannel indication matrix, and when $x_{m,n,q} = 1$, it means the q -th subchannel is assigned to n -th user terminal served by the m -th LEO satellite, otherwise $x_{m,n,q} = 0$. The $\mathbf{P} \in \mathbb{R}^{M \times N \times Q}$ is the power allocation matrix of M LEO satellites. After setting these two matrices with channel gain on subchannel from LEO satellites to user terminals, the received signal-interference-noise-ratio (SINR) is obtained. Thus, the downlink capacity on the q -th subchannel of the n -th user terminal in the m -th LEO satellite can be calculated by the received SINR at the m -th LEO satellite for the n -th user terminal occupying the q -th subchannel via Shannon's formula [15].

on the features of subchannel allocation factor $x_{m,n,q}$ and power control factor $p_{m,n,q}$. The constraints in resource optimization are listed as

$$\begin{aligned} C1 : & \sum_{n=1}^N \sum_{q=1}^Q x_{m,n,q} p_{m,n,q} \leq P, \forall m, \\ C2 : & \sum_{n=1}^N x_{m,n,q} \leq 1, \forall m, q, \\ C3 : & |\theta_{m,n_1} - \theta_{m,n_2}| \geq x_{m,n_1,q} x_{m,n_2,q} \theta_{th} \\ & , \forall m, q, n_1, n_2, \quad (2) \\ C4 : & \sum_{q=1}^Q x_{m,n,q} C_{m,n,q} \geq R_n, \forall n, \\ C5 : & p_{m,n,q} \geq 0, \forall m, n, q, \\ C6 : & x_{m,n,q} \in \{0, 1\}. \end{aligned}$$

$$p_{m,n,q}^* = \frac{\tilde{p}_{m,n,q}}{x_{m,n,q}} = \left[\frac{1}{\ln 2} \left(\frac{1+v_{m,n}}{\lambda_{m,n}} \right) - \frac{I_{m,n,q}}{g_{m,n}^m |h_{m,n,q}|^2} \right]^+, \quad (13)$$

where $[x]^+ = \max(0, x)$. Through Eq. (13), the optimal power control factor is also calculated. The master dual problem can be solved as

$$\lambda_m^{(t+1)} = \left[\lambda_m^{(t)} - \gamma_1^{(t)} \left(P_{\max} - \sum_{q=1}^Q p_{m,n,q} \right) \right]^+, \forall m, n, \quad (14)$$

$$v_{m,n}^{(t+1)} = \left[v_{m,n}^{(t)} - \gamma_2^{(t)} (C_{m,n,q} - R_n) \right]^+, \forall m, n, \quad (15)$$

where $\gamma_1^{(t)}$ and $\gamma_2^{(t)}$ are the steps size of iteration t . With the update of λ and v , not only the power control factor in Eq. (13), but also the subchannel scheduling factor is optimized dynamically.

3.2 Satellite MEC Scheduling

Aiming at improving the user terminals' QoS and reduce traffic volume in the space-air-ground-integrated networks, satellite mobile edge computing (SMEC) is applied to the satellites. Four deployment schemes of SMEC [17] are no edge computing, proximal terrestrial offloading (PTO), satellite offloading (SBO), and remote terrestrial offloading (RTO). Although the PTO decreases latency from long backhaul substantially, its high cost fails to deploy remote areas. SBO is also not economically viable, which characterizes SMEC embedded in LEO satellites. In addition, it will significantly increase its power consumption. Compared with PTO and SBO, RTO is more practical for the implementation of MEC. In this scheme, SMEC servers will be deployed in gateways which connect the Internet. The deployment of SMEC servers is an important consideration if cost and transmission delay arrive at an equilibrium.

The functions of SMEC can be divided into computing offloading and caching deployment, aiming to reduce the traffic burden of space-to-terrestrial links. Thus, the effort of SMEC with caching is responsive effectively to variable situations. All LEO satellites and ground stations are equipped with local caching, which constitutes cooperation of two-layer caching

deployment. The deployment of MEC servers in the ultra dense network enables power-sufficient gateways to connect to core networks.

To evaluate the relationship computing offloading and caching deployment, a popularity-based caching policy is denoted as the request probability for a computing task $d \in s_{m,n}$ as follows:

$$z_n(d, \delta, N) = \frac{1}{(d)^\delta} \sum_{n=1}^N \frac{1}{n^\delta}. \quad (16)$$

δ indicates the popularity profile. Through the popularity analysis of each user terminal n , the alleviation of backhaul bandwidth can be given by

$$\Delta C_m = \sum_n z_n \bar{C}_m y_{m,n}, \quad (17)$$

where $\bar{C}_m = \frac{1}{M} \sum_{m=1}^M \sum_{n=1}^N \sum_{q=1}^Q C_{m,n,q}$, $\forall m$. ΔC_m is added by the objective function in Eq. (3). Meanwhile, the caching constraint is also added as:

$$C7: \sum_n x_{m,n,q} y_{m,n} s_{m,n} < Y_m. \quad (18)$$

Y_m is the storage limitation of each LEO satellite m and $s_{m,n}$ denote user terminal n 's content size.

Different from the caching case of ground stations which respond to the request from its serviced user terminals immediately, the caching case of satellites takes advantage of their broadcast property. The satellite receives the requests of users in their present footprint at a certain time. On completion of the request collection, the satellites communicate with their local cache, and continues to transmit a few requests to the gateways for data generation or information collection on the Internet. Binary variables represent the connection between the LEO satellite and its user terminal on a certain subchannel. And the requests for content from user terminals follow Zipf distribution [30, 31]. As it is shown in Figure 2, the caching deployment is divided into three stages. In the preliminary stage, the required content of user terminals has been completely cached in the local LEO-TST, so the local caching can satisfy the demand of user terminals. If that was not the case, the requests for content would be sent to the current LEO satellite. In the second stage, the satellites will broadcast the local content to its footprint,

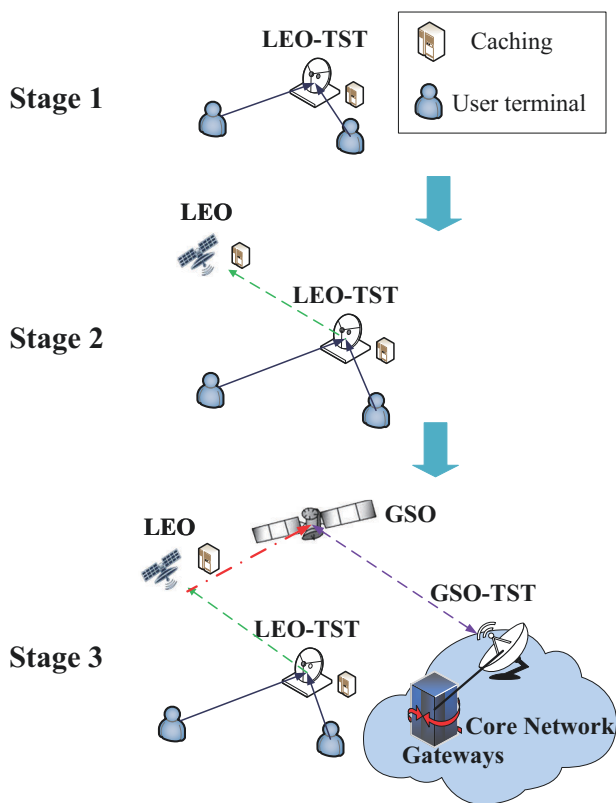


Figure 2. The procedures of caching deployment in SMEC.

and send unfulfilled requests to GSO satellites. Then, In the third stage, the requests will be transmitted to the gateway with SMEC, and the complex tasks will be transferred to the core networks. The scheme of caching helps alleviate the overloaded traffic and enhance the overall capacity.

The caching deployment can be controlled by the binary parameter $y_{m,n}$. If LEO satellite m cached local data of user terminal n , the caching deployment factor $y_{m,n}$ equals 1.

An algorithm of distributed joint subchannel allocation and power control is devised. Besides, the caching deployment is also included in the resource allocation scheme. The procedure of resource allocation is presented in Figure 3. Figure 3 illustrates procedures of resource optimization including subchannel allocation, power control, and caching deployment in the architecture. Firstly, each user terminal occupies only one subchannel and obtains equal power. Then the number of iterations T_{max} and Lagrangian variables vectors $\{\lambda, \mu, \nu\}$ are initialized. Each LEO satellite deploys the caching via popular analysis. Subsequently, the algorithm does not stop iteration until the

convergence or reaches to T_{max} . During the loop, the subchannel scheduling factor $x_{m,n,q}$ and power control factor $p_{m,n,q}$ updates by Eq. (11) and Eq. (13), respectively. Lagrangian variables vectors $\{\lambda, \mu, \nu\}$ updated by Eq. (14) and Eq. (15). And then the capacity of the whole network systems is calculated. If the total capacity of the networks convergence, the algorithm terminates and jumps out of this loop. The resource optimization and its corresponding solution are obtained. The simulation results and discussion section scrutinizes and expounds the results of the proposed algorithms via simulation results.

IV. INTERFERENCE MANAGEMENT SCHEME IN ULTRA DENSE SATELLITE-ENABLED 6G NETWORKS

To mitigate the spectrum scarcity, the cognitive terrestrial-satellite networks have been emerged as one of promising approaches. This technique can be regarded as the extension of cognitive radio in terrestrial-satellite networks, where the primary networks share spectrum with secondary networks. The users in these two networks are considered as the primary users (PUs) and secondary users (SUs). The functions of the cognitive integrated terrestrial-satellite networks are spectrum awareness and spectrum exploitation. Spectrum awareness obtains relevant information of the surroundings, and spectrum exploitation distributes the available resources optimally among the SUs [32].

At present, the academics and industries mainly pay attention to the spectrum reuse of satellite and terrestrial networks. In this paper, cognitive integrated terrestrial-satellite networks equip the LEO satellites with spectrum sensing. Each LEO satellite makes decisions to judge whether or not the subchannels are vacant via the information of spectrum awareness. Due to long latency or estimation errors, it is difficult to achieve perfect spectrum sensing of downlink of cognitive integrated terrestrial-satellite networks. In addition, compared with the certain decay in GSO satellites, the Doppler shifts [12] will also aggravate the complexity of obtaining the perfect spectrum information. In this imperfect situation, the interference power constraint can not guarantee the QoS of PUs.

Based on the discussion above, the imperfect spec-

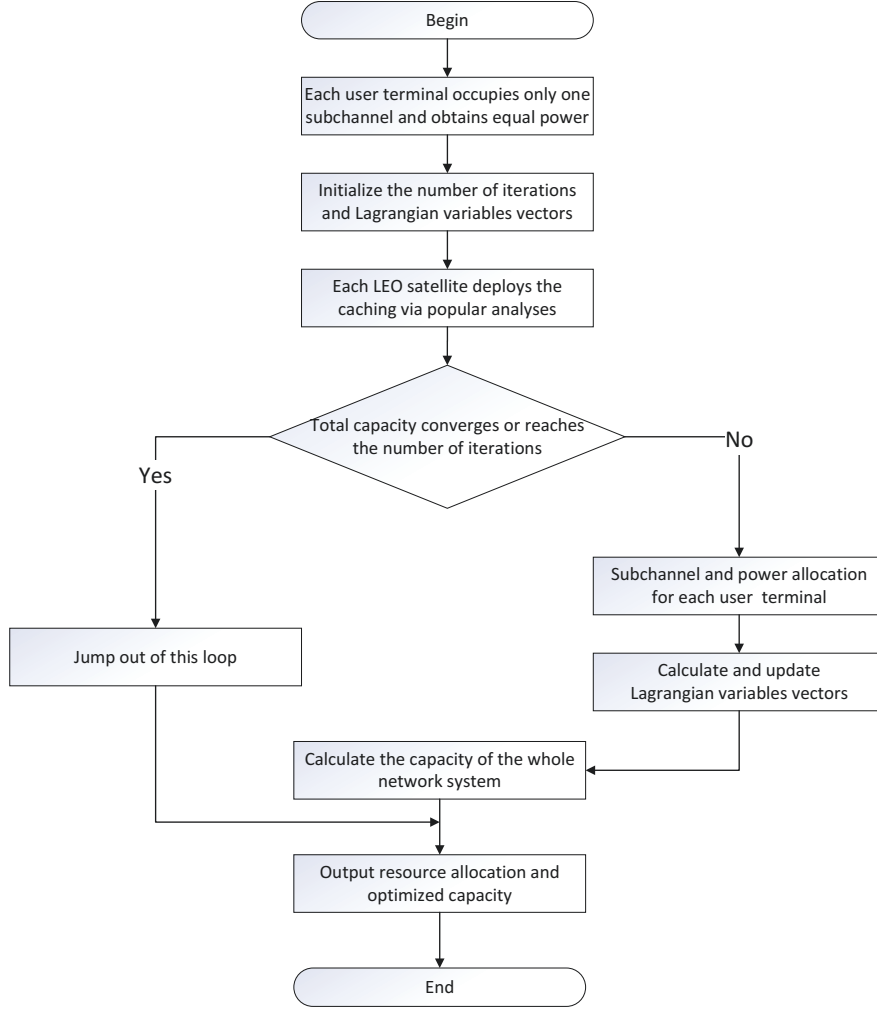


Figure 3. The procedures of resource optimization.

trum sensing of LEO satellites may lead to severe co-tier and cross-tier interference in the whole system, which is from other LEO satellites and from remote GSO satellites respectively. The cross-tier interference will be influenced by two cases. \hat{H}_q^o and \hat{H}_q^v are introduced to symbolize the hypothesis of subchannel q 's occupation and vacant by the GSO satellite, respectively. And H_q^o is denoted as the real result of subchannel q 's occupation. A situation that the determination is occupied while a subchannel is vacant in a primary network is called false alarm. The false alarm probability $\Pr \left\{ \hat{H}_q^v | H_q^o \right\}$ is calculated as

$$\Pr \left\{ \hat{H}_q^v | H_q^o \right\} = \frac{(1 - s_q^p) s_q^f}{(1 - s_q^p) s_q^f + (1 - s_q^m) s_q^p}. \quad (19)$$

Accordingly, A situation that the determination is occupied while a subchannel is occupied in a primary network is defined as a correct detection. This situation $\Pr \left\{ \hat{H}_q^o | H_q^o \right\}$ is calculated as

$$\Pr \left\{ \hat{H}_q^o | H_q^o \right\} = \frac{(1 - s_q^m) s_q^p}{(1 - s_q^p) s_q^f + (1 - s_q^m) s_q^p}, \quad (20)$$

where s_q^p and is the probability of GSO's occupation of subchannel q . And s_q^f and s_q^m is denoted as the probabilities of the false alarm and misdetection on subchannel s , respectively. Taking these two cases into consideration, the interference power threshold can be obtained, instead of the initial value. Under the action of large propagation delay, the outdated spectrum

information is inapplicable to real-time interference.

$$I_{m,n,q}^{cross} = p_{m,n,q} \left(\sum_{s \in \mathcal{N}^v} \Pr \left\{ \hat{H}_q^v | H_q^o \right\} I_{m,n,i}^q + \sum_{q \in \mathcal{N}^o} \Pr \left\{ \hat{H}_q^o | H_q^o \right\} I_{m,n,i}^q \right). \quad (21)$$

Thus, a probabilistic approach with the transmitted power P_s is adopted, and the P_s equals minimum among the quotient of pre-calculated interference power constraint divided by the channel gain of interference links and the maximum allowable transmit power.

Based on the above analysis, the constraint $C7$ is presented to limit the cross-layer interference from GSO satellites. We denote I_{th}^{cross} as the cross-layer interference temperature threshold and the constraint is given by

$$C8 : \sum_{m=1}^M \sum_{n=1}^N I_{m,n,q}^{cross} < I_{th}^{cross}, \forall q. \quad (22)$$

Besides, the co-tier interference form neighboring LEO satellites is also considered. Similar to I_{th}^{cross} , the co-tier interference limit is denoted as I_{th}^{co} .

$$C9 : \sum_{m' \neq m}^M \sum_{n' \neq n}^N x_{m',n',q} \cdot p_{m',n',q} |h_{m',n,q}|^2 < I_{th}^{co}, \forall q. \quad (23)$$

These two constraints $C7$ and $C8$ discussed above added to the proposed algorithm of resource allocation, there are two Lagrangian multiplier vectors correspondingly. Meanwhile, comprehensive utilization of all subchannels boosts the total capacity of the networks.

V. SIMULATION RESULTS AND DISCUSSIONS

In this section, simulation results and discussion are presented. The simulation environment is deployed in Matlab 2019. The number of LEO satellites ranges from 1 to 30. The bandwidth B equals to 10 MHz. The initial transmit power of LEO satellites P_{s1} equals 14.3 dBW [33], and that of GSO satellites P_{s2} is 15.2 dBW [34]. The height of LEO satellite and GSO satellite are set as 1,000 km and 36,000 km, respectively.

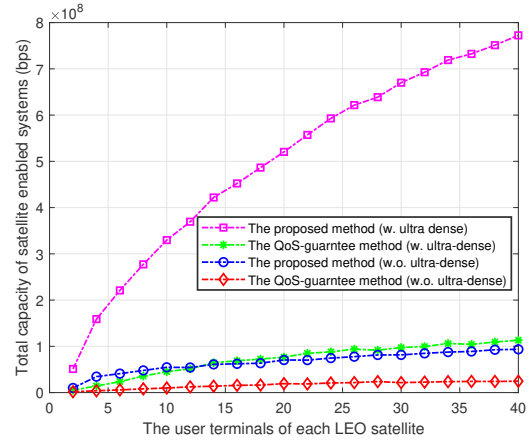


Figure 4. Total capacity vs. the number of user terminals of LEO satellites.

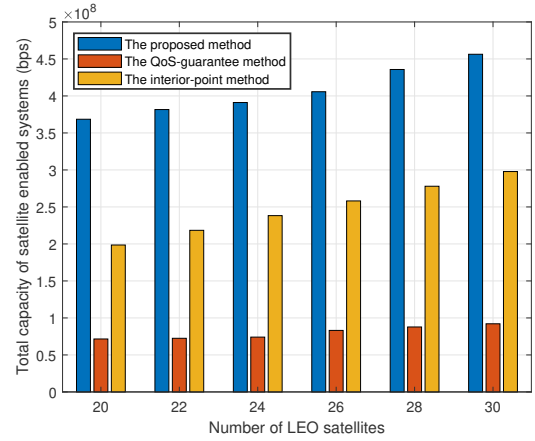


Figure 5. Total capacity vs. the number of LEO satellites.

Figure 4 shows the total capacity versus the number of LEO satellite's user terminals. As it shows in Figure 4, the total capacity increases when the number of the LEO satellite's user terminals grows. The comparison between "with ultra-dense satellite" and "without ultra-dense satellite" have been added in Figure 4. There are 30 LEO satellites deployed in scenario "with ultra-dense satellite" and 3 LEO satellites deployed in scenario "without ultra-dense satellite". It can be seen that the proposed method is superior to the current QoS-guarantee method. Through both of performances of two methods, "with ultra-dense satellite" quite obtained more capacity in the total systems. It can ensure the higher rate requirement in the satellite-enabled 6G networks.

However, Figure 5 illustrates the total capacity versus the number of the LEO satellites. The number of

Table 1. The differences in four typical application scenarios.

Application scenarios	Scale of terminals	Density of terminals	Caching deployment
The aspects of core networks	thousands	dense	without caching
The aspects of metropolitan areas	thousands	dense	with caching
The aspects of remote areas	hundreds	sparse	without caching
The aspects of seas or air	hundreds	dense	with caching

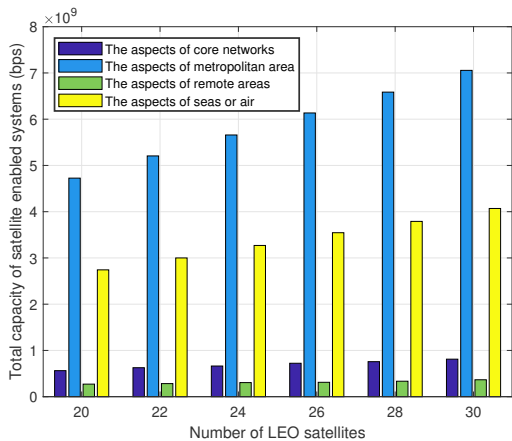


Figure 6. Total capacity vs. the number of LEO satellites.

LEO satellites' user terminals is 10. In terms of spectrum efficiency, interior-point-method power control is compared with the proposed method and the QoS-guarantee method, in which the MAX-SINR algorithm [35] allocates subchannels. Figure 5 suggests that better spectrum efficiency is more achievable by the proposed Lagrangian dual decomposition method than interior-point method or the QoS-guarantee method. It is obvious that the proposed Lagrangian dual decomposition method is superior to the QoS-guarantee method according to Figure 4 and Figure 5. Thus, the proposed method is more applicable to the networks, on the premise that algorithm complexity is less involved in the scheme.

Figure 6 shows the total capacity versus the number of LEO satellites, comparing the mentioned four typical application simulation results. The different simulation features are listed in Table 1. Owing to the adequate computation and storage performance, the core networks do not require the caching deployment. On the other hand, the aspects of remote areas is so sparsely populated that caching deployment is unnecessary. The main difference between the aspects of remote areas and the aspects of seas or air depends on

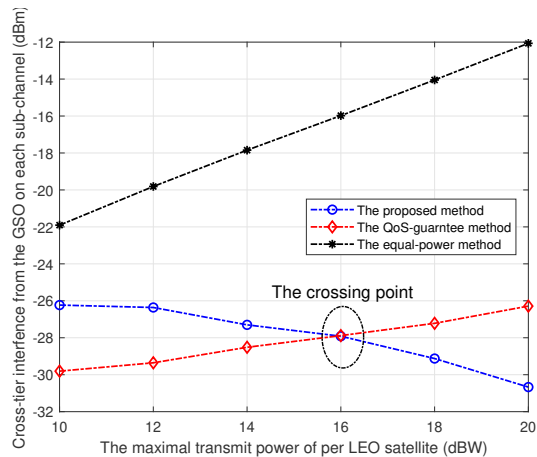


Figure 7. Cross-tier interference from GSO satellite to user terminals in each subchannel.

the density of terminals. The number of LEO satellites' user terminals is set as 100 in the aspects of core networks and the aspects of metropolitan areas. Nevertheless, the number of LEO satellites' user terminals is set as 10 in the aspects of remote areas and 30 in the aspects of seas or air. The caching deployment is added in the aspects of core networks and the aspects of seas or air. The popularity profile δ is set as 1 in Eq. (16). It can be seen that the aspects of core networks do not need too high backhaul capacity because of the predominant performance of computing and storage. Meanwhile, the aspect of remote areas also do not need the backhaul capacity because of the sparse population. On the contrary, the aspects of metropolitan areas acquire higher capacity due to the dense user terminals, seas or air as well.

Figure 7 shows cross-tier interference from GSO satellite to user terminals when the maximal transmit power of per LEO satellite P_{s2} increases from 10 dBW to 20 dBW. The simulation parameters are set as $M = 10$ and $N = 10$. The QoS-guarantee method and the equal-power method are introduced to compared with the proposed method. Different from the referred

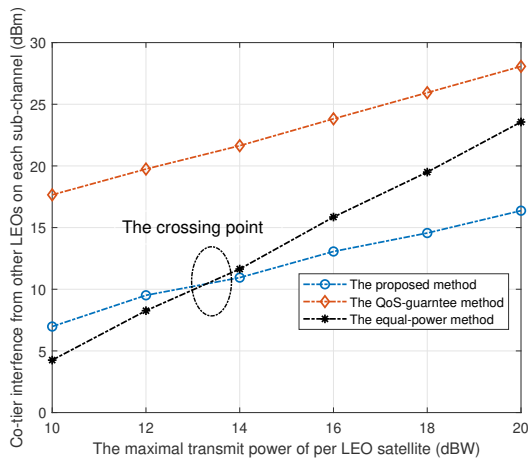


Figure 8. Co-tier interference from other LEO satellites to user terminals in each subchannel.

methods, the proposed method obtains the decrease of cross-tier interference with the gradual increase of the maximal transmit power of per LEO satellite P_{s2} . And it can be seen that the proposed method is superior to the QoS-guarantee method when P_{s2} reaches to 16 dBW. Thus, the proposed Lagrangian dual decomposition method is more practical to the higher transmit power P_{s2} .

Figure 8 shows that the co-tier interference suffered in each subchannel from LEO satellites when maximum transmit power of LEO satellites P_{s2} increases from 10 dBW to 20 dBW, while the number of user terminals per LEO $N = 10$ and the number of LEO satellites $M = 10$. Figure 8 illustrates that the proposed method of co-tier channel gain at LEO satellites results in a lower co-tier interference than the QoS-guarantee method, and the co-tier interference will increase with P_{s2} increasing. Similar to the cross-tier interference from GSO satellite, the proposed Lagrangian dual decomposition method is also suitable for the higher transmit power P_{s2} in terms of co-tier interference.

VI. OPEN ISSUES AND CHALLENGES

With the complementary use of satellite networks between and terrestrial networks, cognitive integrated terrestrial-satellite networks outperform most of traditional networks. However, there are still many open issues and challenges emerging from ultra dense satellite-enabled 6G networks. 1) Deep sea or space scenarios: The high Doppler effect triggered by the

presence of high-speed mobility and the cost of APs. 2) The coordination of orbits among GSO satellites and other NGSO satellites. A much-anticipated scheme is required to coordinate the increasing connection of satellites, and advanced versions of this architecture are needed to involve more and more satellites in medium earth orbit, which suggest directions for future research. 3) A unified standard of interference management between cognitive integrated terrestrial-satellite networks and traditional terrestrial networks. Multi-faceted factors are closely related to the interference in cognitive integrated terrestrial-satellite networks, which complicates interference management further. The implementation of unified standards is a massive leap to advance the next generation networks.

VII. CONCLUSION

The opening section of the paper lays out the deployment scenarios and the architecture of ultra dense satellite-enabled 6G heterogeneous networks. Complemented by each other, GSO satellites and LEO satellites system ensure the seamless communication on the ground, in cooperation with traditional cellular terrestrial networks. Grounded on the the current research, a three-layer caching deployment scheme combined with SMEC is highlighted. Additionally, resource optimization and interference management are conducted by convex optimization. Simulation results clearly verify the advantages of the proposed algorithms over existing algorithms.

ACKNOWLEDGEMENT

This work was supported in part by the National Key R&D Program of China (2020YFB1806103), the National Natural Science Foundation of China under Grant 62225103 and U22B2003, Beijing Natural Science Foundation (L212004), and China University Industry-University-Research Collaborative Innovation Fund (2021FNA05001).

References

- [1] W. Saad, M. Bennis, *et al.*, "A vision of 6g wireless systems: Applications, trends, technologies, and open research problems," *IEEE Network*, vol. 34, no. 3, pp. 134–142, 2019.


-
- [2] H. Zhang, Y. Duan, *et al.*, “Energy efficient resource allocation in terahertz downlink noma systems,” *IEEE Transactions on Communications*, vol. 69, no. 2, pp. 1375–1384, 2020.
- [3] S. Zhang, M. Li, *et al.*, “Airis: Artificial intelligence enhanced signal processing in reconfigurable intelligent surface communications,” *China Communications*, vol. 18, no. 7, pp. 158–171, 2021.
- [4] L. U. Khan, S. R. Pandey, *et al.*, “Federated learning for edge networks: Resource optimization and incentive mechanism,” *IEEE Communications Magazine*, vol. 58, no. 10, pp. 88–93, 2020.
- [5] X. Fang, W. Feng, *et al.*, “5g embraces satellites for 6g ubiquitous iot: Basic models for integrated satellite terrestrial networks,” *IEEE Internet of Things Journal*, vol. 8, no. 18, pp. 14 399–14 417, 2021.
- [6] P. Deyi, A. Bandi, *et al.*, “Hybrid beamforming, user scheduling, and resource allocation for integrated terrestrial-satellite communication,” *IEEE Transactions on Vehicular Technology*, 2021.
- [7] M. Sheng, D. Zhou, *et al.*, “6g service coverage with mega satellite constellations,” *China Communications*, vol. 19, no. 1, pp. 64–76, 2022.
- [8] X. Zhu, C. Jiang, *et al.*, “Cooperative multigroup multicast transmission in integrated terrestrial-satellite networks,” *IEEE Journal on Selected Areas in Communications*, vol. 36, no. 5, pp. 981–992, 2018.
- [9] O. Maraqa, A. S. Rajasekaran, *et al.*, “A survey of rate-optimal power domain noma with enabling technologies of future wireless networks,” *IEEE Communications Surveys & Tutorials*, vol. 22, no. 4, pp. 2192–2235, 2020.
- [10] M. Collins and M. J. Collins, *A telephone for the world: Iridium, motorola, and the making of a global age*. JHU Press, 2018.
- [11] J. C. McDowell, “The low earth orbit satellite population and impacts of the spacex starlink constellation,” *The Astrophysical Journal Letters*, vol. 892, no. 2, p. 36, 2020.
- [12] Y. Su, Y. Liu, *et al.*, “Broadband leo satellite communications: Architectures and key technologies,” *IEEE Wireless Communications*, vol. 26, no. 2, pp. 55–61, 2019.
- [13] H. Zhang, N. Liu, *et al.*, “Energy efficient subchannel and power allocation for software-defined heterogeneous vlc and rf networks,” *IEEE Journal on Selected Areas in Communications*, vol. 36, no. 3, pp. 658–670, 2018.
- [14] H. Cui, J. Zhang, *et al.*, “Space-air-ground integrated network (sagin) for 6g: Requirements, architecture and challenges,” *China Communications*, vol. 19, no. 2, pp. 90–108, 2022.
- [15] W. Teng, M. Sheng, *et al.*, “Joint optimization of base station activation and user association in ultra dense networks under traffic uncertainty,” *IEEE Transactions on Communications*, 2021.
- [16] B. Di, H. Zhang, *et al.*, “Ultra-dense leo: Integrating terrestrial-satellite networks into 5g and beyond for data offloading,” *IEEE Transactions on Wireless Communications*, vol. 18, no. 1, pp. 47–62, 2018.
- [17] Z. Zhang, W. Zhang, *et al.*, “Satellite mobile edge computing: Improving qos of high-speed satellite-terrestrial networks using edge computing techniques,” *IEEE Network*, vol. 33, no. 1, pp. 70–76, 2019.
- [18] S. K. Sharma, S. Chatzinotas, *et al.*, “In-line interference mitigation techniques for spectral coexistence of geo and ngeo satellites,” *International Journal of Satellite Communications and Networking*, vol. 34, no. 1, pp. 11–39, 2016.
- [19] Z. Ji, S. Wu, *et al.*, “Popularity-driven content placement and multi-hop delivery for terrestrial-satellite networks,” *IEEE Communications Letters*, 2021.
- [20] C. Qiu, H. Yao, *et al.*, “Deep q-learning aided networking, caching, and computing resources allocation in software-defined satellite-terrestrial networks,” *IEEE Transactions on Vehicular Technology*, vol. 68, no. 6, pp. 5871–5883, 2019.
- [21] S. Fu, J. Gao, *et al.*, “Integrated resource management for terrestrial-satellite systems,” *IEEE Transactions on Vehicular Technology*, vol. 69, no. 3, pp. 3256–3266, 2020.
- [22] Y. Ruan, Y. Li, *et al.*, “Energy efficient power allocation for delay constrained cognitive satellite terrestrial networks under interference constraints,” *IEEE Transactions on Wireless Communications*, vol. 18, no. 10, pp. 4957–4969, 2019.
- [23] O. Y. Kolawole, S. Vuppala, *et al.*, “On the performance of cognitive satellite-terrestrial networks,” *IEEE Transactions on Cognitive Communications and Networking*, vol. 3, no. 4, pp. 668–683, 2017.
- [24] S. Shi, G. Li, *et al.*, “Optimal power control for real-time applications in cognitive satellite terrestrial networks,” *IEEE Communications Letters*, vol. 21, no. 8, pp. 1815–1818, 2017.
- [25] D. Zhou, M. Sheng, *et al.*, “Machine learning based resource allocation in satellite networks supporting internet of remote things,” *IEEE Transactions on Wireless Communications*, 2021.
- [26] J. Christensen, “Itu regulations for ka-band satellite networks,” in *30th AIAA International Communications Satellite System Conference (ICSSC)*, p. 15179, 2012.
- [27] L. J. Ippolito Jr, *Satellite communications systems engineering: Atmospheric effects, satellite link design and system performance*. John Wiley & Sons, 2017.
- [28] E. Lutz, D. Cygan, *et al.*, “The land mobile satellite communication channel-recording, statistics, and channel model,” *IEEE Transactions on Vehicular Technology*, vol. 40, no. 2, pp. 375–386, 1991.
- [29] S. Boyd, S. P. Boyd, *et al.*, *Convex optimization*. Cambridge University Press, 2004.
- [30] E. Bastug, M. Bennis, *et al.*, “Living on the edge: The role of proactive caching in 5g wireless networks,” *IEEE Communications Magazine*, vol. 52, no. 8, pp. 82–89, 2014.
- [31] H. Zhou, T. Wu, *et al.*, “Incentive-driven deep reinforcement learning for content caching and d2d offloading,” *IEEE Journal on Selected Areas in Communications*, 2021.
- [32] K. Tekbıyık, O. Akbunar, *et al.*, “Spectrum sensing and signal identification with deep learning based on spectral correlation function,” *IEEE Transactions on Vehicular Technology*, 2021.
- [33] ITU, “Coordination of the 15 satellite network in ific 2862,” https://www.itu.int/online/sns/nongeo.sh?sat_type=N&ie=y&ntc_id=113520120&categ=C.
- [34] ITU, “Coordination of the chnewsat-g1-118e satellite network in ific 2870,” https://www.itu.int/online/sns/geo.sh?sat_type=G&ie=y&ntc_id=117520445&categ=C.
- [35] P. Aquilina and T. Ratnarajah, “Performance analysis of ia techniques in the mimo ıbc with imperfect csi,” *IEEE Trans-*
-

Biographies



communication.

Xiangnan Liu received the BS degree from the School of Computer and Communication Engineering, University of Science and Technology of Beijing, Beijing, China, in 2019. He is currently pursuing his Ph.D. degree at University of Science and Technology Beijing, China. His research interests include access control, beamforming, and resource allocation in 6G wireless



Haijun Zhang is currently a Full Professor and Associate Dean in School of Computer and Communications Engineering at University of Science and Technology Beijing, China. He serves/served as an Editor of *IEEE Transactions on Communications*, and *IEEE Transactions on Network Science and Engineering*. He received the IEEE CSIM Technical Committee Best Journal Paper Award in 2018, IEEE ComSoc Young Author Best Paper Award in 2017, IEEE ComSoc Asia-Pacific Best Young Researcher Award in 2019. He is a Distinguished Lecturer of IEEE and a Fellow of IEEE.



Min Sheng received the M.S. and Ph.D. degrees in communication and information systems from Xidian University, Xi'an, China, in 2000 and 2004, respectively. She is currently a Full Professor in Xidian University. Prof. Sheng is the Fellow of the China Institute of Electronics (CIE) and the Fellow of the China Institute of Communication (CIC). Her research interests include mobile ad hoc networks, 5G mobile communication systems, and satellite communications networks.



Wei Li received his Ph.D. degree in communication and information system from Beijing University of Posts and Telecommunications (BUPT) in 2013. Now, he is a professorate senior engineer in Satellite Frequency and Orbit Resource Agency in the State Radio Monitoring Center / State Radio Spectrum Management Center of China. His current research interests include intersystem frequency compatibility analysis and interference management for space communication systems.



Saba Al-Rubaye received the Ph.D. degree in electrical and electronic engineering from Brunel University London, Uxbridge, U.K., in 2013. She is a Reader in Autonomous and Connected Systems Leading Connectivity Research and Development at DARTeC School of Aerospace, Cranfield University, Bedfordshire. She has published over 20 journals and conference papers in the areas of energy efficiency and telecommunications. Her research interests include energy efficient networks, smart grid communications, microgrid, and wireless communications. Dr. Al-Rubaye is a member of the IET and European Technology Platform Photonics 21. She registered as a Chartered Engineer (CEng) by Engineering Council in the U.K. and recognized as an Associate Fellow of the British Higher Education Academy. She acts as a Reviewer for the *IEEE Transactions on Vehicular Technology* and the *IEEE Transactions on Control Systems Technology*. Also, she has served on technical program committees and organizing committees for leading conferences of several international conferences such as the *IEEE GLOBECOM*, *IEEE PIMRC*, *IEEE ICC*, *IEEE WCNC*, and *IEEE CIT*. She was a recipient of the Best Paper Award twice from WWRF published in *IEEE Vehicular Technology* in 2011 and 2015, respectively.



Keping Long received the M.S. and Ph.D. degrees from the University of Electronic Science and Technology of China, Chengdu, in 1995 and 1998, respectively. From September 1998 to August 2000, he was a Postdoctoral Research Fellow at the National Laboratory of Switching Technology and Telecommunication Networks, Beijing University of Posts and Telecommunications (BUPT), China. From September 2000 to June 2001, he was an Associate Professor at BUPT. From July 2001 to November 2002, he was a Research Fellow with the ARC Special Research Centre for Ultra Broadband Information Networks (CUBIN), University of Melbourne, Australia. He is currently a professor and Dean at the School of Computer and Communication Engineering, University of Science and Technology Beijing. He has published more than 200 papers, 20 keynote speeches, and invited talks at international and local conferences. His research interests are optical Internet technology, new generation network technology, wireless information networks, value added services, and secure technology of networks. Dr. Long has been a TPC or ISC member of COIN 2003/04/05/06/07/08/09/10, *IEEE IWCN* 2010, *ICON* 2004/06, *APOC* 2004/06/08, Co-Chair of the organization Committee for *IWCMC* 2006, TPC Chair of *COIN* 2005/08, and TPC Co-Chair of *COIN* 2008/10. He was awarded by the National Science Fund for Distinguished Young Scholars of China in 2007 and selected as the Chang Jiang Scholars Program Professor of China in 2008. He is a member of the *Editorial Committees of Sciences* in China and *China Communications*.

Ultra dense satellite-enabled 6G networks: Resource optimization and interference management

Liu, Xiangnan

2023-10-01

Attribution-NonCommercial 4.0 International

Liu X, Zhang H, Sheng M, et al., (2023) Ultra dense satellite-enabled 6G networks: Resource optimization and interference management. *China Communications*, Volume 20, Issue 10, October 2023, pp. 262-275

<https://doi.org/10.23919/JCC.ea.2021-0740.202302>

Downloaded from CERES Research Repository, Cranfield University